



# Railway™ specification guide





# Table of contents

- Product Introduction** ..... 5
  - Railway specs and line drawings ..... 6
- Configuration Inspiration** ..... 8
- Custom specification ordering guide.** .....19
  - Rail part numbers and specifications ..... 20
  - Post kit part numbers and specifications .....21
  - Electrical components ..... 22
  - New York Black Box ..... 23
- Railway Linear pre-configurations** ..... 24
- Electrical information** ..... 30

Please visit [esiergo.com](http://esiergo.com) for current list pricing on all products included in this spec guide.








# Railway

## Power and data solution

Railway is the perfect solution to get power to your workstations and works seamlessly with our height adjustable bases by accommodating you to lower your table to its lowest setting without any obstructions. Our power and data solution is simple while providing the user with different sizes to accommodate all your different workstation configurations. Our data and power are separated and hidden inside the rail which keeps the workstation clean and organized. As your needs or workspace evolves, so can Railway, by simply reconfiguring it to match your new configured needs. It truly is that easy.

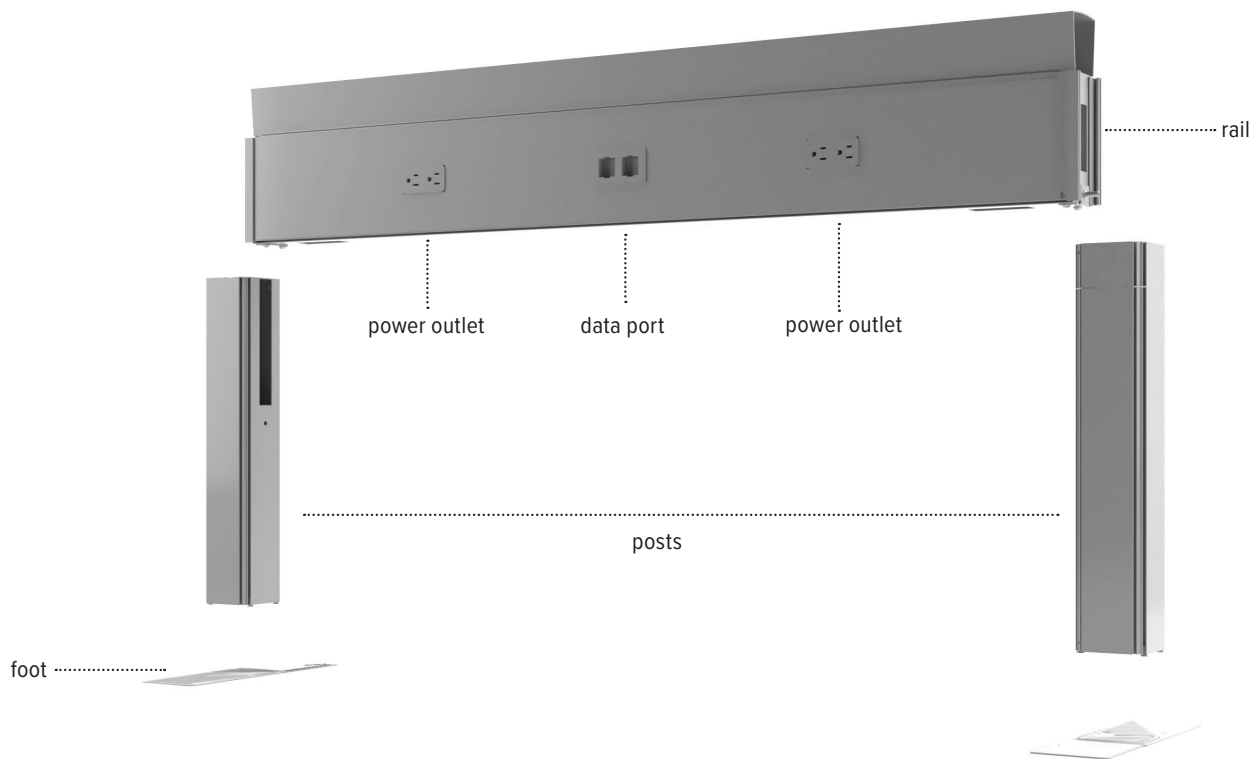

## Product Specs

- Four available widths: 36.0", 48.0", 60.0", and 72.0"
- 18.0"h x 3.3"w post
- 3.6"w x 12.0"d T foot - *(standard)*  
3.6"w x 7.8"d L foot - *(optional)*
- Power and data can be utilized on both sides of the rail
- Separate cable/data channel that allows for lay-in cable runs
- Up to ten rails can be connected to each other  
*(for anything over ten rails, contact a local electrician)*
- Up to eight 125V AC outlets per rail and four inputs for data
- Specify base or ceiling feed
- Flexible power feeds with 3.5" of extension through flexible metal conduit
- UL listed as an Office Furnishing Accessory (UL1286), UL183, and in full compliance with NEC electrical specifications
- Optional electric compliance available for municipal standards such as NY Box, California Title 24, and Chicago
- 20 amps
- Four circuits, eight wire Byrne™ 8trac system
- Up to 13 duplex receptacles per circuit (total of 52 available duplex receptacles allowed)
- 12 AWG line conductors which share a 12 AWG ground and 10 AWG neutral
- Fourth circuit is isolated and dedicated
- Warranty: 15 yr. *(structural)* / 7 yr. *(electrical)*

## Available base finishes





● Silver -SLV  
48"/60" ship in 48 hrs.  
36"/72" LT

● LT Black -BLK  
All sizes LT

● LT White -WHT  
All sizes LT

LT = call for on-hand availability



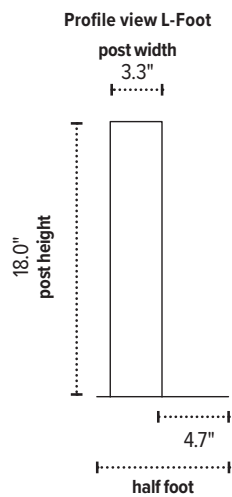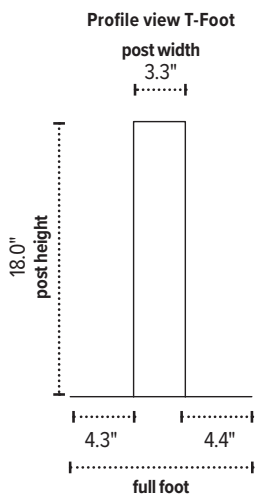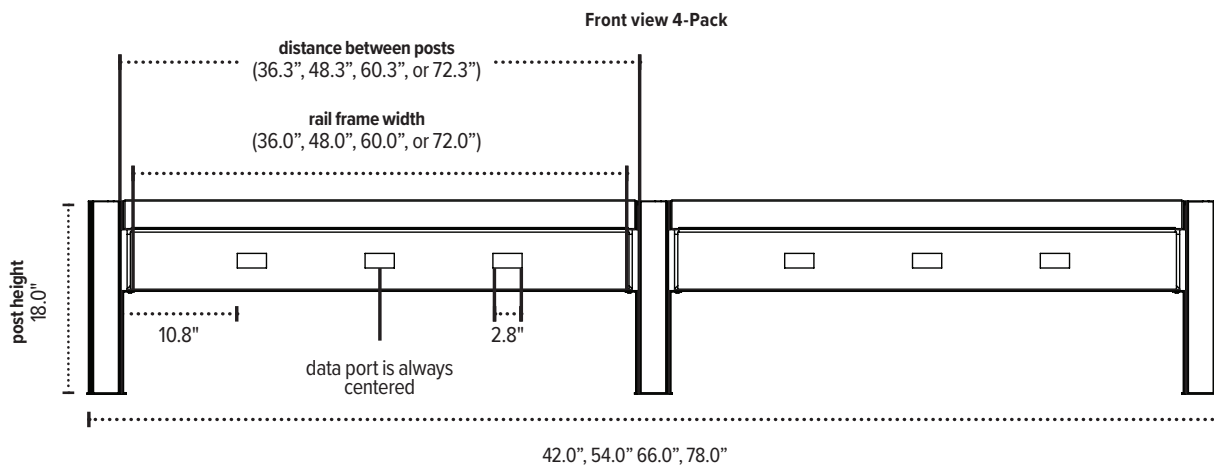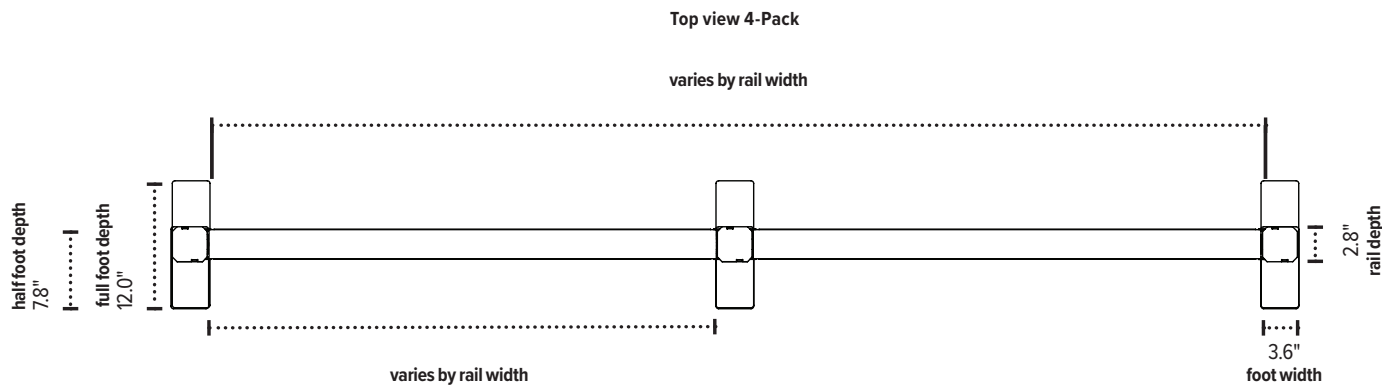

When considering space requirements, it is important to remember to include the total combination of rail and post measurements.


# Railway layout inspiration

With endless configurations to choose from, here are just a few common layout examples.



# Configuration one

Drawings are not to scale

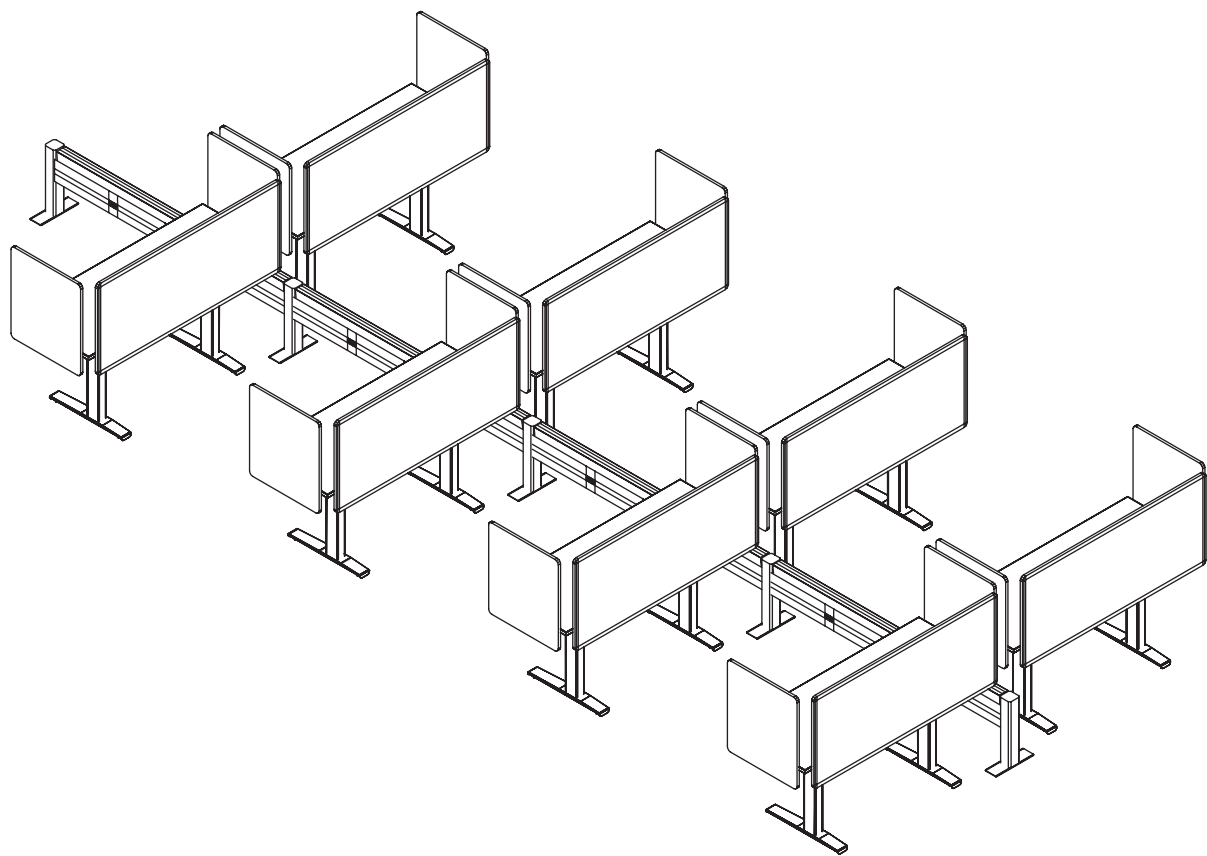

## Railway components


Quantity	Model#	
1	RAIL-KIT72-8PK-DBL	Linear 72" 8-pack kit

## Additional ESI products

Quantity	Model#	
8	2T-LX-C48-24-_-_-	2-leg TriumphLX electric table base
8	2R6024-TFL-_-	60x24 TFL Rectangle worksurface
8	CENTRO-58-_-_-	Centro privacy panel 58" length
16	CENTRO-22-_-_-	Centro privacy panel 22" length
8	CONCEAL-_-_-	Conceal cable manager (22 links)
8	TROUGH-DLX-KIT-BLK	Trough wire manager 18"

## Configuration two

Drawings are not to scale

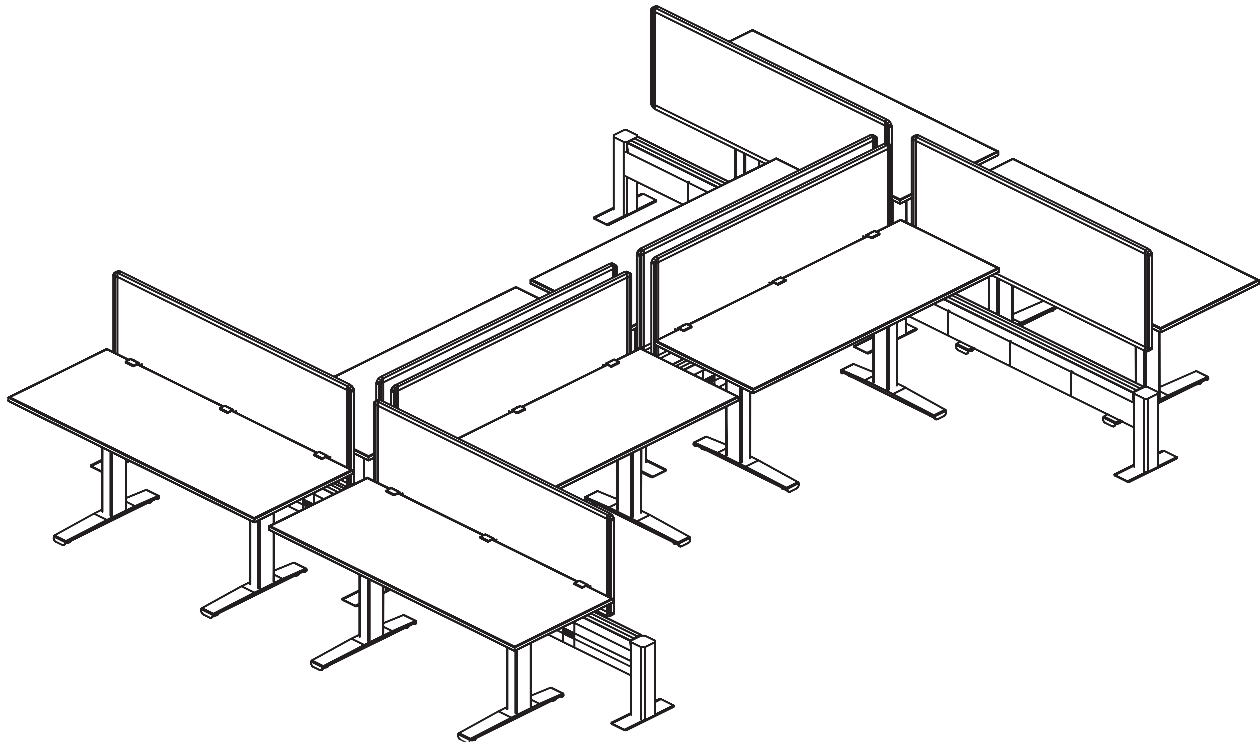

### Railway components

Quantity	Model#	Product description
6	RAIL-RWY60-DBL-___	60" rail
4	POSTKIT-END-DBL-___	End posts
2	POSTKIT-3WAY-DBL-___	3-way post
1	POSTKIT-180-DBL-___	180° post
1	BASEFEED-72-END	72" base-feed
5	RAIL-JUMPER-22	22" jumper


### Additional ESI products

Quantity	Model#	Product description
8	2T-LX-C48-24-___	2-leg TriumphLX electric table base
8	2R6024-TFL-__	60x24 TFL Rectangle worksurface
8	CENTRO-58-___	Centro privacy panel 58" length
8	CONCEAL-___	Conceal cable manager (22 links)
8	TROUGH-DLX-KIT-BLK	Trough wire manager 18"



### Configuration three

Drawings are not to scale

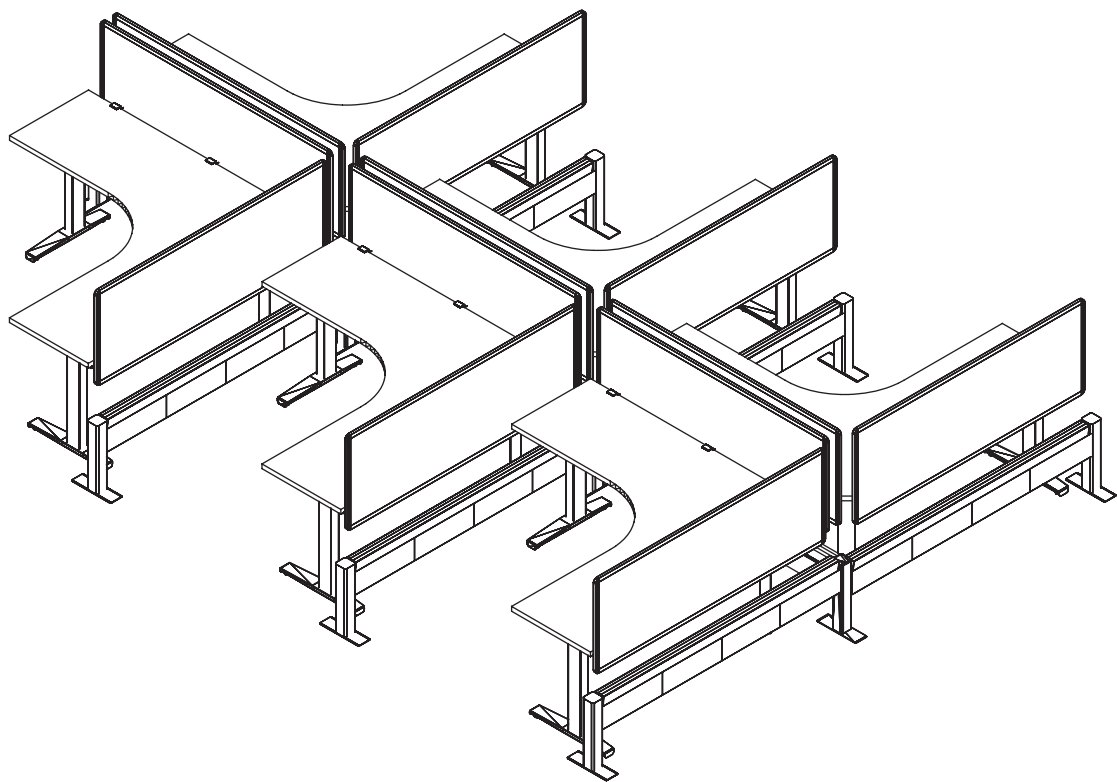

#### Railway components


Quantity	Model#	Product description
9	RAIL-RWY72-DBL-___	72" rail
2	POSTKIT-4WAY-DBL-___	4-way post
1	POSTKIT-3WAY-DBL-___	3-way post
7	POSTKIT-END-DBL-___	End posts
1	BASEFEED-72-END	72" base-feed
8	RAIL-JUMPER-22	22" jumper

#### Additional ESI products

Quantity	Model#	Product description
6	3VT-LX-C4848-24-___	3-leg VictoryLX electric table base
6	3EC727224-HPL-__	72x72x24 HPL Equal corner worksurface
12	CENTRO-70-___	Centro privacy panel 70" length
6	CONCEAL-___	Conceal cable manager (22 links)
12	TROUGH-DLX-KIT-BLK	Trough wire manager 18"

### Configuration four

Drawings are not to scale

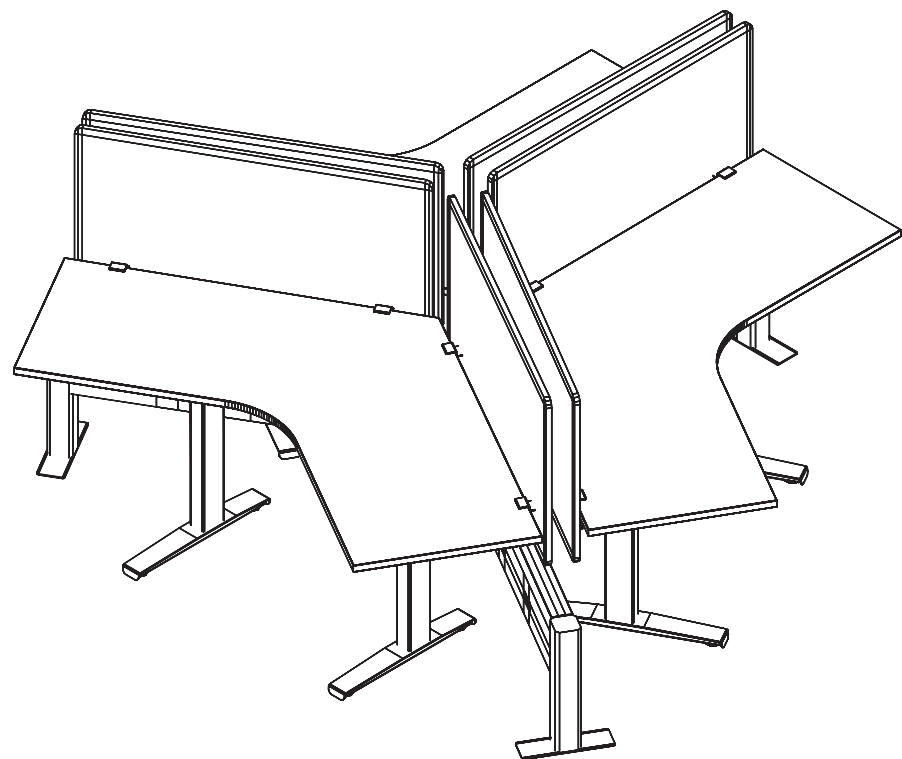

#### Railway components

Quantity	Model#	Product description
3	RAIL-RWY48-DBL-__ _	48" rail
3	POSTKIT-END-DBL-__ _	End posts
1	POSTKIT-120-DBL-__ _	120° post
1	BASEFEED-72-END	72" base-feed
2	RAIL-JUMPER-22	22" jumper


#### Additional ESI products

Quantity	Model#	Product description
3	2T-LX-C48-24-__ _	2-leg TriumphLX electric table base
3	120-4824-TFL-__ _	48x24 TFL 120 Degree worksurface
6	CENTRO-46-__ _	Centro privacy panel 46" length
3	CONCEAL-__ _	Conceal cable manager (22 links)
3	TROUGH-DLX-KIT-BLK	Trough wire manager 18"



### Configuration five

Drawings are not to scale

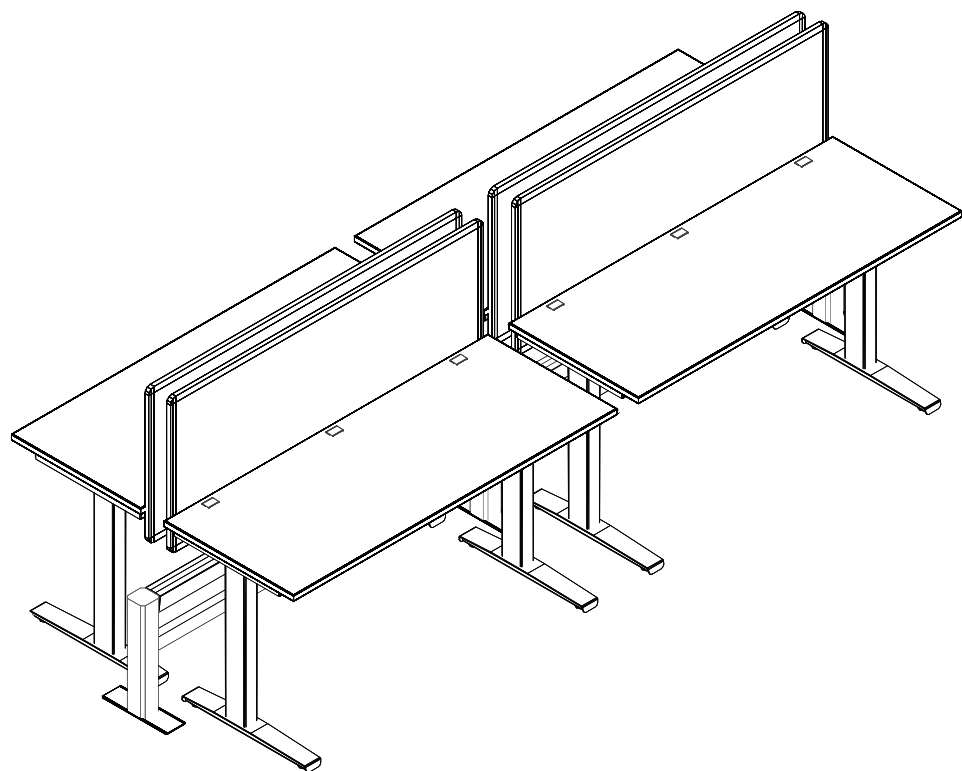

#### Railway components


Quantity	Model#	Product description
1	RAIL-KIT60-4PK-DBL-___	Linear 60" 4-pack kit

#### Additional ESI products

Quantity	Model#	Product description
4	2T-LX-C48-24-___	2-leg TriumphLX electric table base
4	2R6024-TFL-__	60x24 TFL Rectangle worksurface
4	CENTRO-58-___	Centro privacy panel 58" length
4	CONCEAL-___	Conceal cable manager (22 links)
4	TROUGH-DLX-KIT-BLK	Trough wire manager 18"

Configuration six

Drawings are not to scale

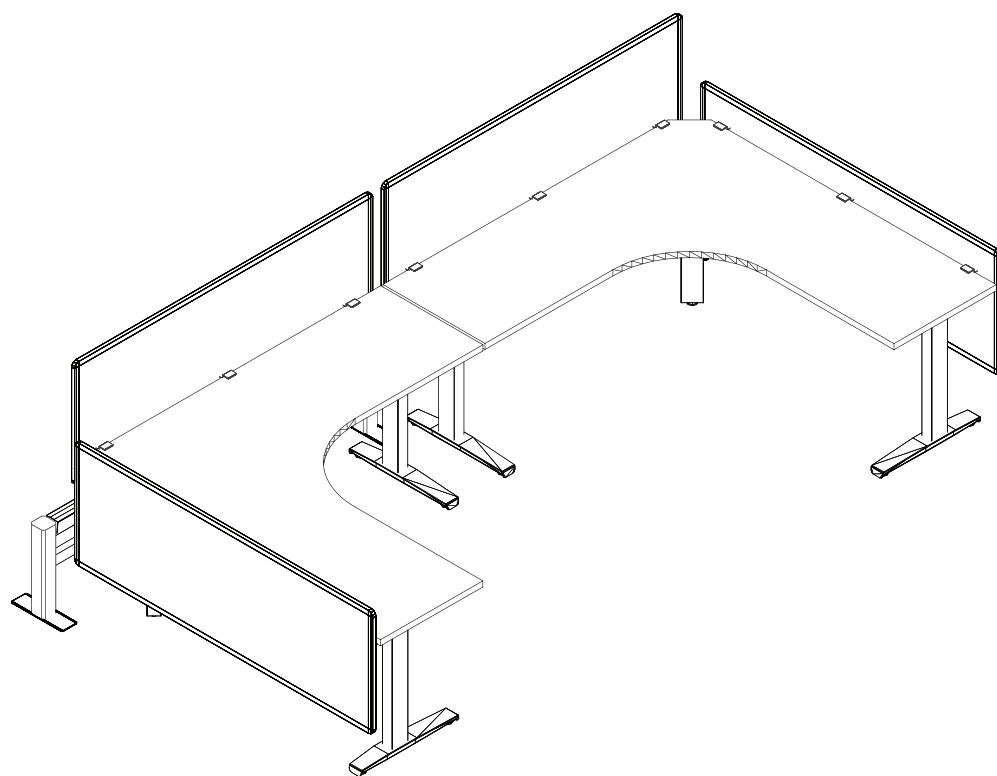

Railway components


Quantity	Model#	Product description
1	RAIL-KIT72-4PK-DBL-__ _	Linear 72" 4-pack kit

Additional ESI products

Quantity	Model#	Product description
2	3VT-LX-C4848-24-__ _	3-leg VictoryLX electric table base
2	3EC727224-HPL-__ _	72x72x24 HPL Equal corner worksurface
4	CENTRO-70-__ _	Centro privacy panel 70" length
2	CONCEAL-__ _	Conceal cable manager (22 links)
2	TROUGH-DLX-KIT-BLK	Trough wire manager 18"

## Configuration seven

Drawings are not to scale

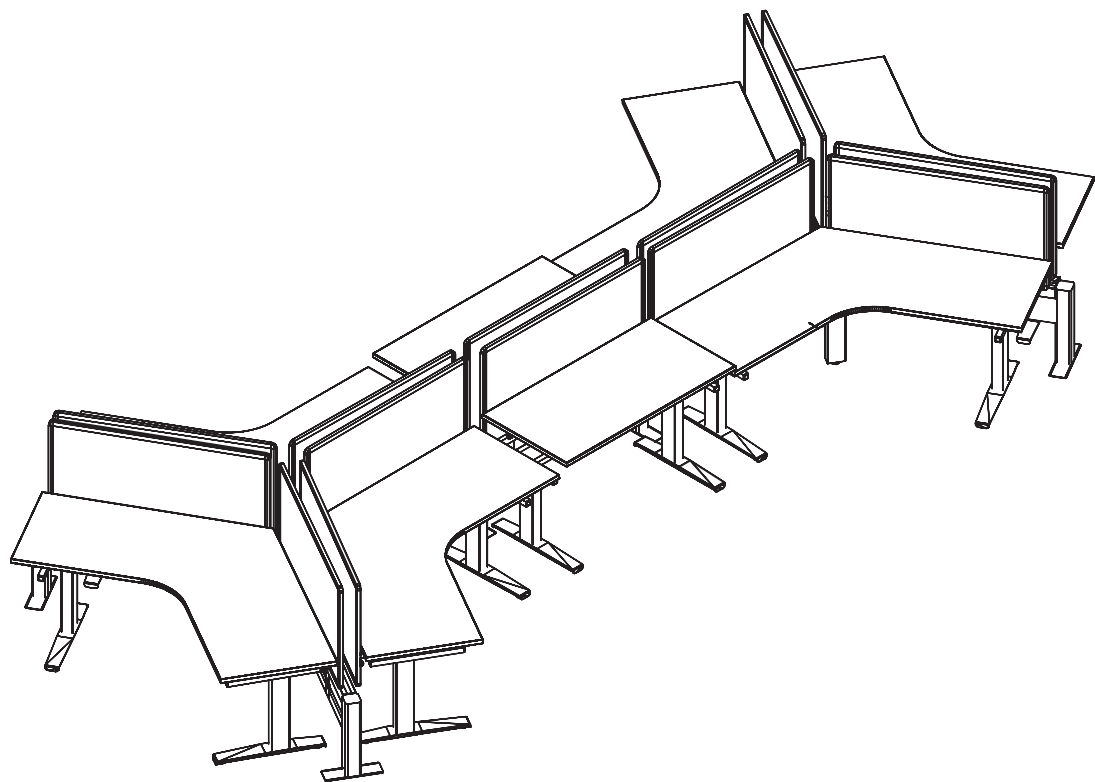

### Railway components

Quantity	Model#	Product description
7	RAIL-RWY48-DBL-____	48" rail
4	POSTKIT-END-DBL-____	End posts
2	POSTKIT-180-DBL-____	180° post
2	POSTKIT-120-DBL-____	120° post
1	BASEFEED-72-END	72" base-feed
6	RAIL-JUMPER-22	22" jumper


### Additional ESI products

Quantity	Model#	Product description
6	3VT-LX-C3636-24-__ _	3-leg VictoryLX electric table base
6	120-4824-TFL-__ _	48x24 TFL 120° worksurface
2	2VT-LX-C36-24-__ _	2-leg TriumphLX electric table base
2	2R4824-TFL-__ _	48x24 TFL Rectangle worksurface
14	CENTRO-46	Centro privacy panel 46" length
8	CONCEAL	Conceal cable manager (22 links)
8	TROUGH-DLX-KIT-BLK	Trough wire manager 18"



## Configuration eight

Drawings are not to scale

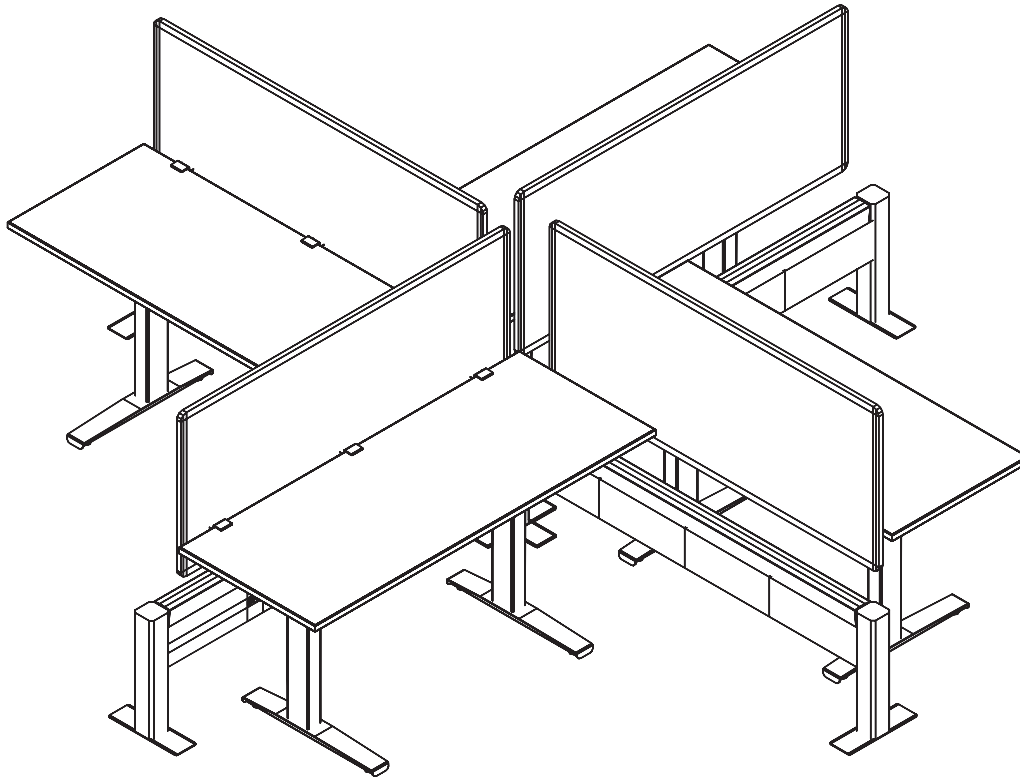

### Railway components

Quantity	Model#	Product description
4	RAIL-RWY60-DBL-___	60" rail
4	POSTKIT-END-DBL-___	End posts
1	POSTKIT-4WAY-DBL-___	4-way post
1	BASEFEED-72-END	72" base-feed
3	RAIL-JUMPER-22	22" jumper

### Additional ESI products

Quantity	Model#	Product description
4	2T-LX-C48-24-___	2-leg TriumphLX electric table base
4	2R6024-TFL-__	60x24 TFL Rectangle worksurface
4	CENTRO-58-___	Centro privacy panel 58" length
4	CONCEAL-___	Conceal cable manager (22 links)
4	TROUGH-DLX-KIT-BLK	Trough wire manager 18"







# Railway custom configurations

The Railway can be customized with endless configurations to meet virtually any needs.


# Custom specification ordering guide

Follow the four steps below to build custom configurations not already include in our standard kits. For additional questions contact Customer Service at 1-800-833.3746.


Individual component model numbers are also available in this section.

## 1 Select your rail

- Specify the length of rail that you need. Available in sizes 36.0", 48.0", 60.0", or 72.0". (see page 20)
- Specify color. Available in silver, black, and white.
  - All finishes are LT (lead time) with the exception of the 48.0" and 60.0" silver Railways, which ship within 48-72 hours.
- Specify the rail.
  - A rail includes (4) four ports for data and/or phone, two on each side. It includes (4) four duplex power receptacles, two on each side, to fully power both sides of the Railway.
  - ESI offers different code compliant rails for New York City (NY), Chicago and California Title 24.



## 2 Select your posts:

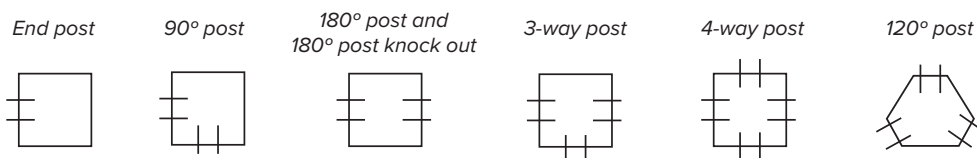

- Each Railway requires (2) two posts per rail.
- All post kits include a 12.0" T-foot by default. An L-foot is only intended for applications going against a wall and not intended for open floor plans.

## 3 Specify base or ceiling feed

- 72.0" base feed is standard.
- 144.0" ceiling feeds are available for drop in power. Integrated power pole specify separately.
- ESI offers different code compliant feeds for NY Box and California Tile 24. (see page 22)
- Chicago Code Railways do not include receptacles, base/ceiling feed or jumpers. Please contact your local electrician for sourcing these items.

## 4 Specify the number of jumpers based on your layout

- There should be one less jumper than rail for specifications, see page 22.
- Chicago Code Railways do not include receptacles, base/ceiling feed or jumpers. Please contact your local electrician for sourcing these items.



## 1 Select the rail type and size:


Rails are available in lengths of 36.0", 48.0", 60.0", and 72.0" with three finish options. It includes data and power receptacles. Does not include posts, feeds, or jumpers. The posts will each add an additional 3.3" to the overall length of each rail.

New York City (NY) will need a special rail. See page 23

Code compliant rails may incur a longer lead time. Please contact Customer Service for a quote.

### Rail includes:

- Top data cover in matching size and finish for data cable management
- (4) Four duplex power receptacles
- (2) Two data receptacles with (2) two ports each for data and phone
- (1) One set of connectors for post mounting
- (2) Two blank plate covers for covering unused ports

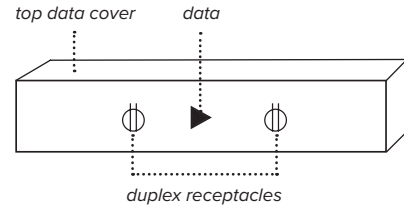

### Rails

#### Model #

RAIL-RWY36-DBL-___	LT	RAIL-RWY60-DBL-___	LT
RAIL-RWY36-DBL-CHI-___	LT	RAIL-RWY60-DBL-CHI-___	LT
RAIL-RWY36-DBL-CALI-___	LT	RAIL-RWY60-DBL-CALI-___	LT
RAIL-RWY48-DBL-___	LT	RAIL-RWY72-DBL-___	LT
RAIL-RWY48-DBL-CHI-___	LT	RAIL-RWY72-DBL-CHI-___	LT
RAIL-RWY48-DBL-CALI-___	LT	RAIL-RWY72-DBL-CALI-___	LT

### Available finishes

- Silver -SLV
  - 48.0"/60.0" ship in 48 hrs.
  - 36.0"/72.0" LT

- LT Black -BLK

- LT White -WHT

LT = call for on-hand availability

## 2 Select the post kit:

### Post kit includes:

- (1) One post in 90°, 180°, 180°KO, 3-way, 4-way, 120°, or end configuration
- (1) One 12.0" T-foot including a hardware pack for foot mounting
- (1) One mounting bracket per cutout for rail mount (example: 3-way includes (3) three brackets, 180° and 90° both contain (2) two
- (1) One top cap

### What post do I need?

- At least (2) two end posts are always recommended for each rail for a clean finished look. An end post goes on a rail anywhere that will NOT connect to an additional rail. Think of them as the "ends" of the configuration. The power feed will also come into the rail through an end post or 180°KO.
- For linear configurations of multiple connected rails, a 180° or 180°KO post is necessary for every rail being connected. Think of these as the "bridge" between rails in a straight line.
- 90°, 3-way, and 4-way post kits are needed wherever a configuration requires connections from different or multiple angles.
- Post dimensions are 3.3" wide by 3.3" deep, by 18.0" high.

#### End posts




#### Model #

POSTKIT-END-DBL-\_\_\_

LT

#### 3-way posts



#### Model #

POSTKIT-3WAY-DBL-\_\_\_

LT

#### 90° posts




#### Model #

POSTKIT-90-DBL-\_\_\_

LT

#### 4-way posts




#### Model #

POSTKIT-4WAY-DBL-\_\_\_

LT

#### 180° posts



#### Model #

POSTKIT-180-DBL-\_\_\_

LT

#### 120° posts




#### Model #

POSTKIT-120-DBL-\_\_\_

LT

\* cap in lieu of foot

#### 180° knock out posts




#### Model #

POSTKIT-180-KO-DBL-\_\_\_


LT

A T-foot is included with all postkits except 120°. If an L-foot is need please specify quantity on the order.

#### Wall application



#### T-foot



LT = call for on-hand availability


### 3 Select the power feed:

We offer a ceiling feed for open floor plans with drop in power or a base feed for hard wired, wall fed power applications.

#### What feed do I need?

- The standard is the 72.0" base feed. This is for hardwiring power directly from the wall into the rail. The power feed can only come through an end post or 180°KO.
- A 144.0" ceiling feed is used when power must be hardwired and "dropped" in from the ceiling. Specify power pole separately.
- ESI offers special feeds that comply with municipal standards for building and power such as NY Box (-NY) and Liquid tight (-CALI). Please check if any of these special power feeds are needed on the project.
- Chicago Code Railways do not include receptacles, base/ceiling feed or jumpers. Please contact your local electrician for sourcing these items.

receptacle



#### Ceiling feed

##### Model #

CEILINGFEED-144	LT
CEILINGFEED-144-NY	LT
CEILINGFEED-144-CALI	LT

#### Base feed

##### Model #

BASEFEED-72-END	LT
BASEFEED-72-END-NY	LT
BASEFEED-72-END-CALI	LT

#### Power pole

##### Model #

RAIL-POLE-142-BLK	LT
-------------------	----

- The pole is 3.0" x 3.75" x 142" long.
- It attaches to the post on its 3.0" side. Which means it will lengthen the Railway by 3.75"
- Only available in black plastic


LT = call for on-hand availability

### 4 Select the number of jumpers:

Jumpers connect power from rail to rail.

#### How many jumpers do I need?

- (1) One jumper for every rail connected in the configuration beyond the initial rail connected to your base feed.
- Chicago Code Railways do not include receptacles, base/ceiling feed or jumpers. Please contact your local electrician for sourcing these items.




#### Rail jumper


##### Model #

RAIL-JUMPER-22	LT
----------------	----


LT = call for on-hand availability




90°




3-way



120°



4-way



## New York City power rail kit

Due to the New York City electrical code requirements we provided a specific NYC power rail kit that meets all specification requested by the city. All parts are provided and need to be installed by a licensed electrician per the code.


The NYC power rail kit is to be used as the designated infeed rail. All other rails in the configuration can be our standard rails

- Please consult local electrician for power draw when connecting more than 5 rails to one endfeed.

NY Kit includes:	Model #
(1) One - NY Power block	NYCPWRBLK00#
(1) One - Jumper	RAIL-JUMPER-22
(1) One - Box	RAIL-NYBOX#

### NY City power rail kit

Model #  
RAIL-POWER-NYCKIT-\_\_\_ LT

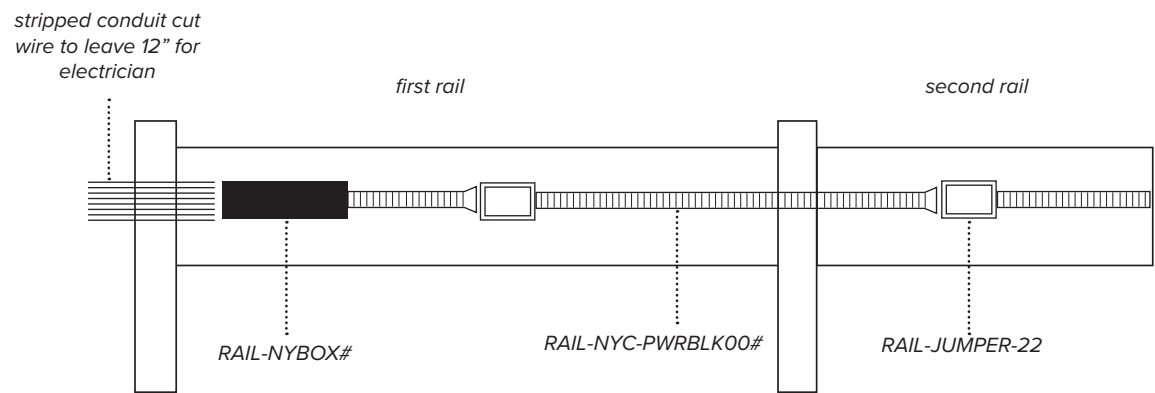

NY Power Kit does not include a railway shell. A shell will need to be purchased to put the power kit in. Please talk to your customer service representative for more information.



# Railway linear pre-configurations

To make ordering easy, there are various linear pre-configurations available.







## Linear configurations

*Drawings are not to scale*

### 2-pack (up to two users)

#### Run includes:

- (2) Two - End posts
- (1) One - Rails in the size of your choosing, double run
- (1) One - BASEFEED-72-END
- (2) Two - T-feet
- (4) Four - Receptacles



#### Model #

RAIL-KIT36-2PK-DBL-\_\_\_  
RAIL-KIT48-2PK-DBL-\_\_\_  
RAIL-KIT60-2PK-DBL-\_\_\_  
RAIL-KIT72-2PK-DBL-\_\_\_

*Posts, rails, and feet will match specified finish*

- A **2-pack** is a one to two user configuration
- Up to **two** users can be provided power and data based on specified run
- Kits not applicable in New York, Chicago, or California

### 4-pack (up to four users)

#### Run includes:

- (2) Two - End posts
- (1) One - 180° post
- (2) Two - Rails in the size of your choosing, double run
- (1) One - BASEFEED-72-END
- (3) Three - T-feet
- (1) One - Jumper
- (8) Eight - Receptacles



#### Model #

RAIL-KIT36-4PK-DBL-\_\_\_  
RAIL-KIT48-4PK-DBL-\_\_\_  
RAIL-KIT60-4PK-DBL-\_\_\_  
RAIL-KIT72-4PK-DBL-\_\_\_

*Posts, rails, and feet will match specified finish*


- A **4-pack** is a two to four user configuration
- Up to **four** users can be provided power and data based on specified run
- Kits not applicable in New York, Chicago, or California

Linear configurations


Drawings are not to scale

2-pack

profile  
view



elevation




plan view




4-pack


profile  
view



elevation



plan view



⊗ Electrical outlet(s) ▶ Data/Telephone outlet(s)




## Linear configurations

*Drawings are not to scale*

### 6-pack (up to six users)

#### Run includes:

- (2) Two - End posts
- (2) Two - 180° posts
- (3) Three - Rails in the size of your choosing, double run
- (1) One - BASEFEED-72-END
- (4) Four - T-feet
- (2) Two - Jumpers
- (12) Twelve - Receptacles

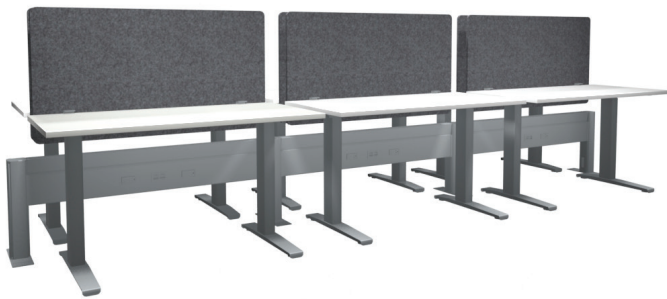

#### Model #

RAIL-KIT36-6PK-DBL-\_\_\_  
RAIL-KIT48-6PK-DBL-\_\_\_  
RAIL-KIT60-6PK-DBL-\_\_\_  
RAIL-KIT72-6PK-DBL-\_\_\_


*Posts, rails, and feet will match specified finish*

- A **6-pack** is a three to six user configuration
- Up to **six** users can be provided power and data based on specified run
- Kits not applicable in New York, Chicago, or California

### 8-pack (up to eight users)

#### Run includes:

- (2) Two - End posts
- (3) Three - 180° posts
- (4) Four - Rails in the size of your choosing, double run
- (1) One - BASEFEED-72-END
- (5) Five - T-feet
- (3) Three - Jumpers
- (16) Sixteen - Receptacles

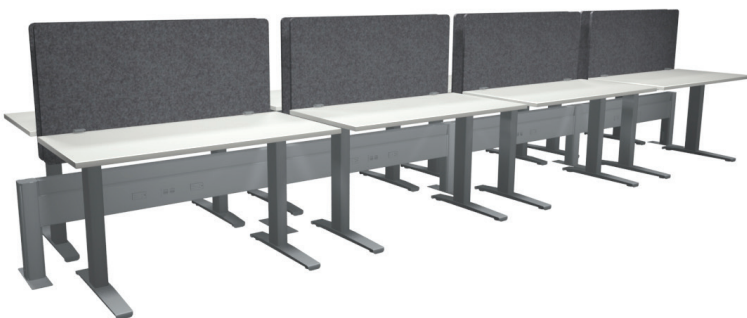

#### Model #

RAIL-KIT36-8PK-DBL-\_\_\_  
RAIL-KIT48-8PK-DBL-\_\_\_  
RAIL-KIT60-8PK-DBL-\_\_\_  
RAIL-KIT72-8PK-DBL-\_\_\_

*Posts, rails, and feet will match specified finish*


- An **8-pack** is a four to eight user configuration
- Up to **eight** users can be provided power and data based on specified run
- Kits not applicable in New York, Chicago, or California

Linear configurations


Drawings are not to scale

6-pack


profile  
view



elevation




plan view




8-pack


profile  
view



elevation



plan view



⊕ Electrical outlet(s) ▶ Data/Telephone outlet(s)


BYRNE electrical information

Circuitry/Keying

The Byrne 8-Trac System is rated for 20 amps allowing the use of 4 circuits with 4 line conductors, 2 neutrals and 2 grounds. Under NEC requirements, up to 13 duplex receptacles maybe used per circuit, with a total of 52 available duplex receptacles if all circuits are used, per single power entry. The line conductors are 12 AWG, and share a 12 AWG ground and a 10 AWG neutral. The fourth circuit is isolated and dedicated, and is serviced by its own line conductor, neutral and isolated ground. Alternate circuit diagrams are available. The Byrne System can be wired in both single and three-phase configurations, 240/120V, 208/120V respectively. Additionally, a 3 hot, 3 neutral, 2 ground (3-3-2) wiring system is available.

3+D wiring diagram 208/120V

(3+D keying is designated as -3- in part numbers)

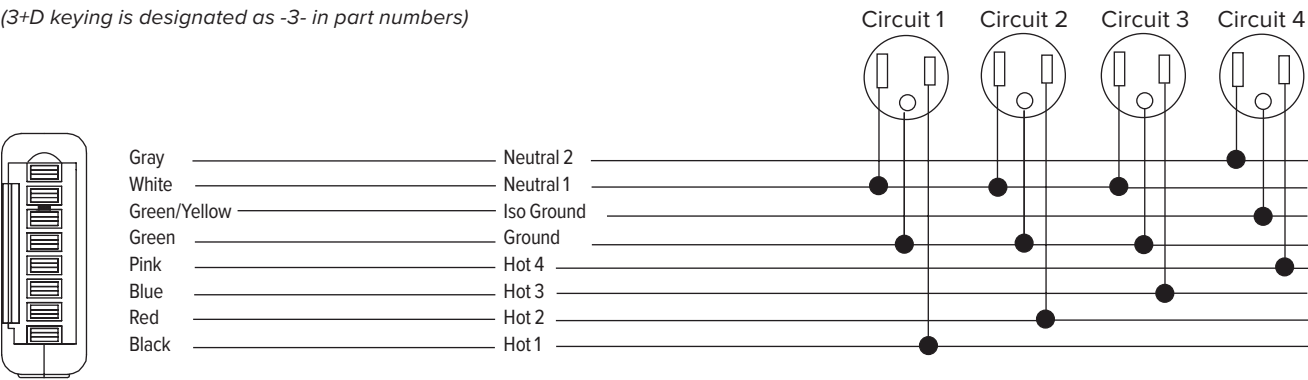



esi.®



**Fellowes**  
Brands.

FAMILY BUSINESS  
SINCE 1917