

Crosschannels feature 30" of width adjustment to accommodate work surfaces 36" - 84" wide

Notched Crosschannel offers ample space for keyboard tray glide tracks

Top supports expand to more effectively support deeper work surfaces

Integrated Control Unit Shelf

Adjustable Feet can accommodate worksurfaces 24" - 36" deep via a removable plate

Integrated storage for foot extension when not in use

ALL-FLEX™ ELECTRIC TABLE BASE

- Adjustable feet and Top Supports accommodate work surfaces 24" - 36" deep
- Height Adjustment Range: 26"
- LOW: 23.2" | HIGH: 49.2"
- Width Adjustment Range: 30"
- Fully Retracted: 33.75"
- Fully Expanded: 63.72"
- Crossbar includes guides to assist in setting width
- Digital keypad with 4 memory settings
- Adjustment Speed: 1.5"/second
- Lifting Capacity (including work surface):
- 265 lbs (equally divided)
- Anti-Collision Safety Feature
- 86" Power Cable



Anti-Collision
Safety Feature



ADA
Compliant



Cable
Management



Steel
Construction



Quiet
Adjustment



Low Power
Consumption



4 memory
settings




Lead Free




Quick Start

**PATENT
PENDING**


ALL-FLEX™ RETRACTED

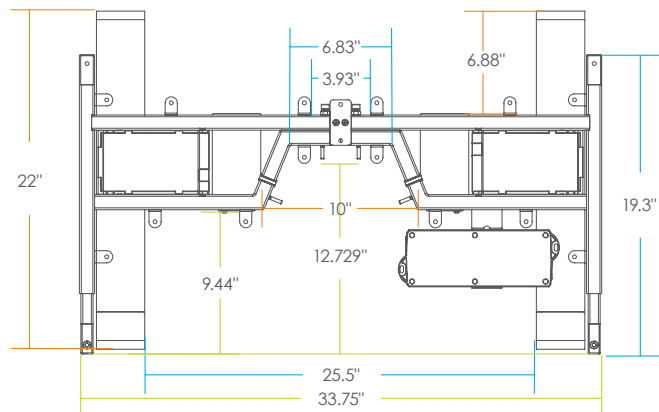

ALL-FLEX™ EXPANDED

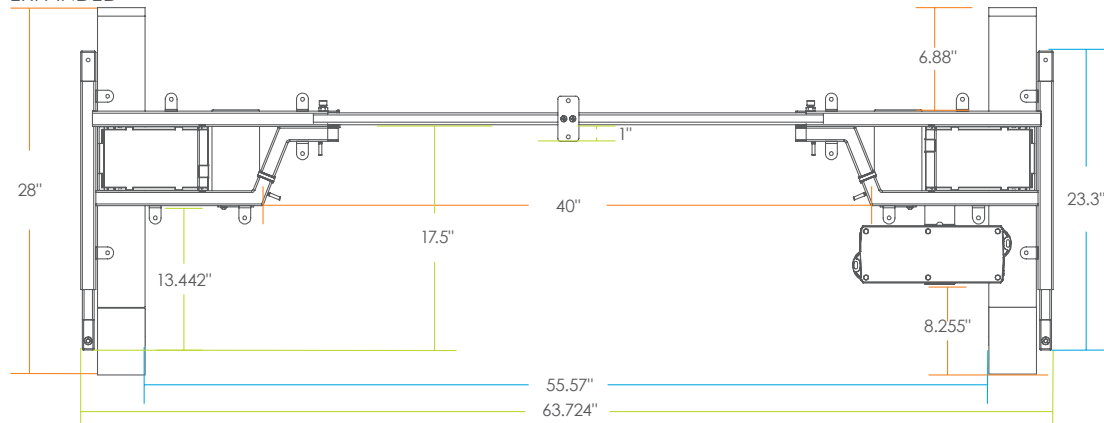

ALL-FLEX™ SIDE

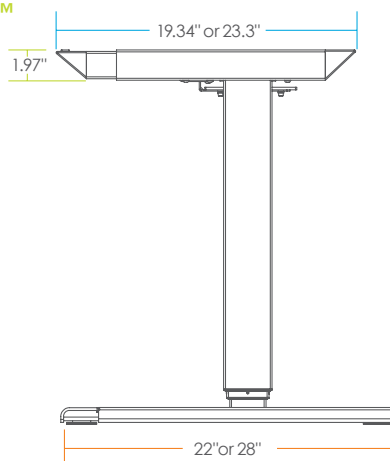

AVAILABLE WORKSURFACES



RECTANGLE



D-TOP



(SEC)

SMALL EQUAL
CORNER

BASE FINISH OPTIONS

COMPLETE THE BASE MODEL # WITH THE 3 LETTER FINISH CODE

-SLV

-BLK

-WHT



RAL: 9022



RAL: 9005




RAL: 9016

LT = CALL FOR ON-HAND AVAILABILITY

EDGE DETAIL

WORKSURFACES SHIP WITH STANDARD SQUARE PROFILE EDGE AND COORDINATING 3MM EDGE BAND.



SQUARE PROFILE

ALL-FLEX™ 2 LEG ORDERING OPTIONS

	DIMENSIONS			BASE MODEL # SPECIFY FINISH	SURFACE MODEL # SPECIFY LAMINATE
	WL	WR	D		
RECTANGLE	36	24		FLEX2-__	2R3624__
	42	24		FLEX2-__	2R4224__
	48	24		FLEX2-__	2R4824__
	60	24		FLEX2-__	2R6024__
	72	24		FLEX2-__	2R7224__
	84	24		FLEX2-__	2R8424__
	36	30		FLEX2-__	2R3630__
	42	30		FLEX2-__	2R4230__
	48	30		FLEX2-__	2R4830__
	60	30		FLEX2-__	2R6030__
	72	30		FLEX2-__	2R7230__
	84	30		FLEX2-__	2R8430__
D-TOP	60	30		FLEX2-__	D6030__
	72	30		FLEX2-__	D7230__
	84	30		FLEX2-__	D8430__
SEC	42	42	24	FLEX2-__	2EC424224__
	48	48	24	FLEX2-__	2EC484824__