


$Espree^{TM}$

pneumatic table base





Product specs

- Pneumatice height adjustment
- 38 lbs.—83 lbs. base lifting capacity (2ESP-C48-ADJ)
- 49 lbs.–94 lbs. base lifting capacity (2ESP-C60-ADJ)
- 19.6" height adjustment range
 - 26.2"-45.8" (low/high) (excluding worksurface)
- Two stage adjustable legs
- Foot is adjustable got 22.0" or 28.0" (patented design)
- Fixed width frame
- · Locking casters are available
- Table bases accommodate worksurfaces measuring 48.0" and 60.0" in width
- Counterbalanced columns provide smooth, synchronized height
- Warranty: 15 yr. structural / 7 yr. mechanical







locking casters

Espree

pneumatic table base

	Dimensions 60"w x 30"d	Base model 2ESP-C60-ADJ	Surface model D6030	
D-top				
	60"w x 30"d	2ESP-C60-ADJ	2R6030	
	60"w x 24"d	2ESP-C60-ADJ	2R6024	
	48"w x 30"d	2ESP-C48-ADJ	2R4830	
	48"w x 24"d	2ESP-C48-ADJ	2R4824	
	Dimensions	Base model	Surface model	

Table bases can be purchased independently or combined with a worksurface. Worksurfaces can only be purchased with a table base. See laminate guide worksurface for details. ESI worksurfaces are made to exact dimensions. If nominal sizing is needed, please specify when ordering.

Caster Kit

- · Set of caster wheels for table bases
- Increases height by 2.0"
- · Locking wheels for security

MODEL # CASTERKIT-2ESP

Available base finishes

Silver -SLV

Black -BLK

(LT) White -WHT

LT=CALL FOR ON HAND AVAILABILITY

Worksurface shapes - LT

Multiple worksurface shapes are available. See chart to the left for full list. Worksurfaces can be come in a variety of laminates.

Edge Detail


Worksurfaces ship with a standard square profile edge and coordinating 3mm edge band. Additional edge detail profiles are available.



Espree


pneumatic table base

2ESP-C48-ADJ

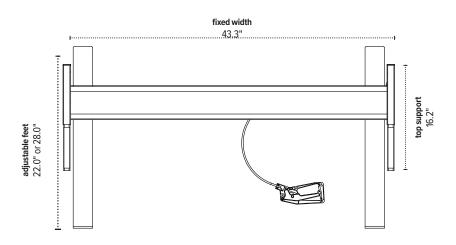

2ESP-C60-ADJ

fixed width 51.2"

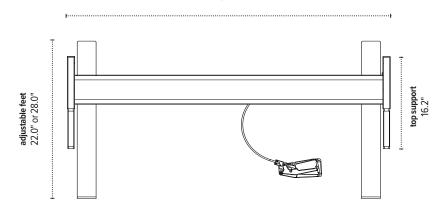

The base dimensions as shown are actual.