

ergonomic Instructions

AA330

ARTICULATING KEYBOARD ARM

Model AA330

AA330 Rev A 4/17




INSTALLATION AND USE

AA330 ARTICULATING KEYBOARD ARM

PLEASE REVIEW these instructions before beginning the installation. Check that all parts needed were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until satisfied that the product operates to your satisfaction.

PARTS PROVIDED

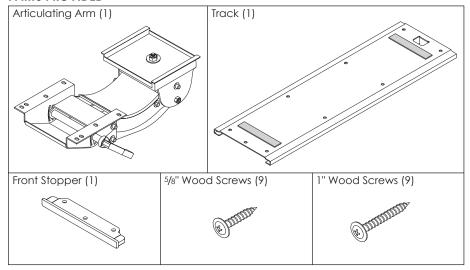

CAUTION: This install requires a power drill. This is not a hand tool install.


ADDITIONAL TOOLS REQUIRED

- #2 Phillips Screw Driver Bit
- 1/8" Drill Bit
- Drill (For Track Installation Only)

STEP 1: Adhere Track

 Peel the backing from the adhesive strips on top of the track.

- Adhere the track to the underside of the work surface.
 - Position the front edge of the track 1/4" from the front edge of the work surface. The front of the track is the end with three holes.
- Press the track firmly in place.




AA330 ARTICULATING KEYBOARD ARM

STEP 2: Attach Track

- Drill 1/8" pilot holes through all nine holes in the track.
 - Drill the holes 5/8" deep or 1" deep, depending on which wood screws will be used. (A minimum work surface thickness of 11/2" is recommended for the 1" screws.)


CAUTION: Be careful not to drill through the work surface.

 Attach the track with screws through the <u>six rear</u> holes only, as shown.




STEP 3: Install Articulating Arm

 Slide the articulating arm onto the track. Position it back far enough so that you have access to the front three holes on the track.



STEP 4: Attach Front Stop

 Position the front stop onto the front of the track and secure it with the final three wood screws.



AA330 ARTICULATING KEYBOARD ARM

OPERATION

To Raise or Lower:

- Tip the platform up to unlock.
- Move the arm to the desired height.
- Release the platform to lock it in place.

To Set Tilt Angle:

- Unlock the quick release handle on the right side of the arm.
- Adjust the tilt angle to the desired position.
- Lock the quick release knob.



800.833.3746 | esiergo.com