



VICTORY-LX™ 3-LEG


ELECTRIC TABLE BASE



- Height adjustment range: 26.1"
 - Low: 21.6" | High: 47.7"
- Adjustment speed: 1.4"/sec
- Lifting capacity:
 - 330 lbs
- Adjustable cross channels
- Anti-collision safety feature
- ADA compliant
- Exceeds BIFMA x5.5 requirements
- Meets BIFMA GI-2013 ergonomic standards when used with a 1" worksurface
- Warranties:
 - 15yr (*structural*)
 - 7yr (*mechanical*)
- Low standby power consumption
- Universal corner bracket that allows base installation for 90° to 120° configurations
- Optional casters are available


DIGITAL KEYPAD INCLUDED WITH BASE

- Digital programmable switch with 3 memory settings
- Keypad can slide under worksurface to store out of the way




AVAILABLE WORKSURFACES

Additional worksurface options are available.
Call customer service for more information.

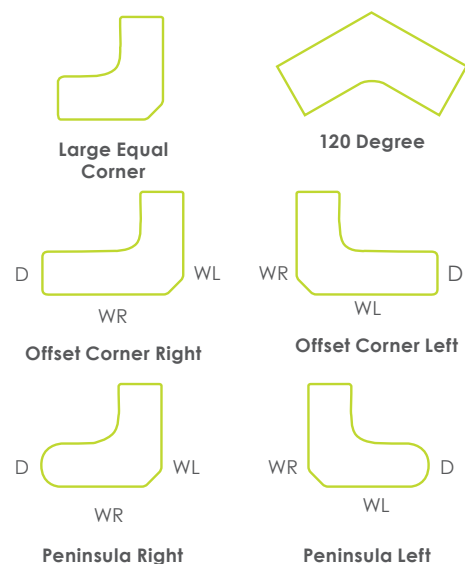

UNIVERSAL CORNER BRACKET

Allows base to be installed in either
a 90° Or 120° Configuration



BASE FINISH OPTIONS


Complete the base model #
with the 3 letter finish code



LT = CALL FOR ON-HAND AVAILABILITY

EDGE DETAIL

Worksurfaces ship with
standard square profile
edge and coordinating
3mm edge band.



Casters
MODEL #
CASTERKIT-LX-3LEG -SLV
CASTERKIT-LX-3LEG -BLK
CASTERKIT-LX-3LEG -WHT

Victory-LX™ 3-Leg Ordering Options NON GSA


	DIMENSIONS			BASE MODEL # SPECIFY FINISH	SURFACE MODEL # SPECIFY LAMINATE
	WL	WR	D		
LARGE EQUAL CORNER	60	60	24	3VT-LX-C4848-24-___	3EC606024__
	72	72	24	3VT-LX-C4848-24-___	3EC727224__
	84	84	24	3VT-LX-C4848-24-___	3EC848424__
	60	60	30	3VT-LX-C4848-30-___	3EC606030__
	72	72	30	3VT-LX-C4848-30-___	3EC727230__
	84	84	30	3VT-LX-C4848-30-___	3EC848430__
120 DEGREE	48	48	24	3VT-LX-C3636-24-___	120-4824__
	60	60	24	3VT-LX-C4848-24-___	120-6024__
	72	72	24	3VT-LX-C4848-24-___	120-7224__
	48	48	30	3VT-LX-C3636-30-___	120-4830__
	60	60	30	3VT-LX-C4848-30-___	120-6030__
	72	72	30	3VT-LX-C4848-30-___	120-7230__
OFFSET CORNER LEFT	60	48	24	3VT-LX-C4836-24-___	3OCL604824__
	72	48	24	3VT-LX-C4836-24-___	3OCL724824__
	72	60	24	3VT-LX-C4848-24-___	3OCL726024__
	84	48	24	3VT-LX-C4836-24-___	3OCL844824__
	84	60	24	3VT-LX-C4848-24-___	3OCL846024__
	84	72	24	3VT-LX-C4848-24-___	3OCL847224__
	60	48	30	3VT-LX-C4836-30-___	3OCL604830__
	72	48	30	3VT-LX-C4836-30-___	3OCL724830__
	72	60	30	3VT-LX-C4836-30-___	3OCL726030__
	84	48	30	3VT-LX-C4848-30-___	3OCL844830__
	84	60	30	3VT-LX-C4848-30-___	3OCL846030__
	84	72	30	3VT-LX-C4848-30-___	3OCL847230__
OFFSET CORNER RIGHT	48	60	24	3VT-LX-C4836-24-___	3OCR486024__
	48	72	24	3VT-LX-C4836-24-___	3OCR487224__
	48	84	24	3VT-LX-C4836-24-___	3OCR488424__
	60	72	24	3VT-LX-C4848-24-___	3OCR607224__
	60	84	24	3VT-LX-C4848-24-___	3OCR608424__
	72	84	24	3VT-LX-C4848-24-___	3OCR728424__
	48	60	30	3VT-LX-C4836-30-___	3OCR486030__
	48	72	30	3VT-LX-C4836-30-___	3OCR487230__
	60	72	30	3VT-LX-C4848-30-___	3OCR607230__
	48	84	30	3VT-LX-C4836-30-___	3OCR488430__
	60	84	30	3VT-LX-C4848-30-___	3OCR608430__
	72	84	30	3VT-LX-C4848-30-___	3OCR728430__
PENINSULA LEFT	72	48	30	3VT-LX-C4836-30-___	3PL724830__
	72	60	30	3VT-LX-C4848-30-___	3PL726030__
	84	48	30	3VT-LX-C4836-30-___	3PL844830__
	84	60	30	3VT-LX-C4848-30-___	3PL846030__
	84	72	30	3VT-LX-C4848-30-___	3PL847230__
	72	84	30	3VT-LX-C4848-30-___	3PL728430__
PENINSULA RIGHT	48	72	30	3VT-LX-C4836-30-___	3PR487230__
	60	72	30	3VT-LX-C4848-30-___	3PR607230__
	48	84	30	3VT-LX-C4836-30-___	3PR488430__
	60	84	30	3VT-LX-C4848-30-___	3PR608430__
	72	84	30	3VT-LX-C4848-30-___	3PR728430__
	72	84	30	3VT-LX-C4848-30-___	3PR728430__



3VT-LX-C4848-24


ADJUSTABLE WIDTH

59"-82"

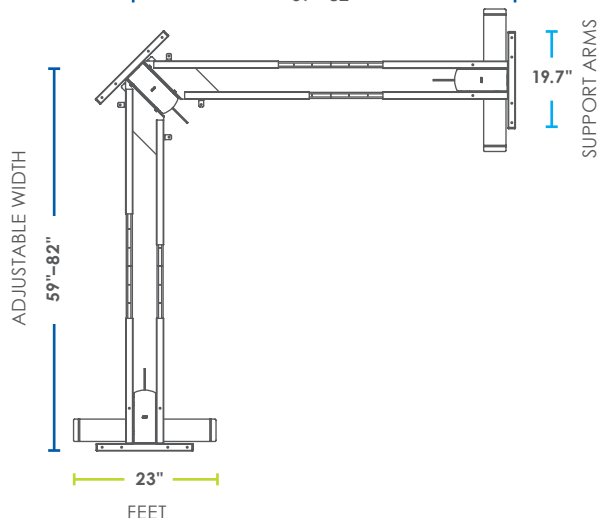

3VT-LX-C3636-24 & 3VT-LX-C3636-30


120° CONFIGURATION

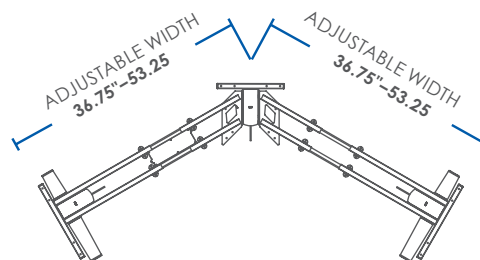

3VT-LX-C4848-30


ADJUSTABLE WIDTH

62"-85"

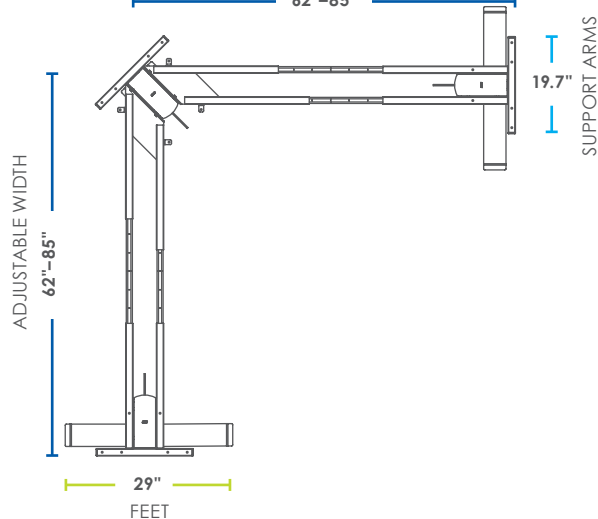

3VT-LX-C4848-24 & 3VT-LX-C4848-30


120° CONFIGURATION

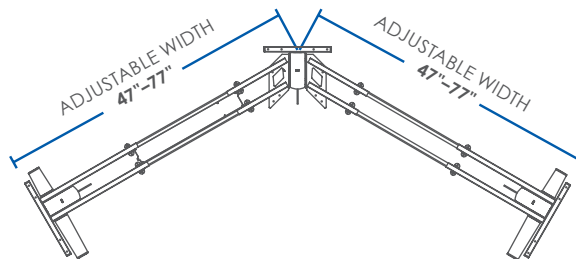

3VT-LX-C4836-24

ADJUSTABLE WIDTH

59"-82"

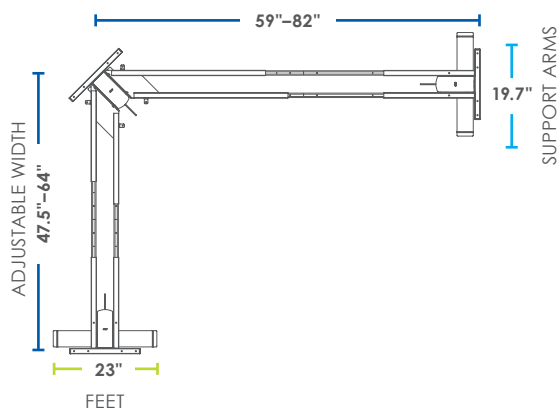

3VT-LX-C4836-30

ADJUSTABLE WIDTH

62"-85"

