



esi®




Acrylic Protective Screens

Revised 4/5/2021

Acrylic Screen Overview



Bracket Type	Screen Options	Single Screen	U Shape Screen
Post Bracket Screw Mount 	No Gap		
	2.0" Gap	●	
	4.0" Access Slot		
Low Profile Bracket Screw or Adhesive Mount 	No Gap	●	
	4.0" Access Slot	●	
Offset Bracket Clamp Mount 	Standard 0.435" Gap		
Flush Desktop Bracket Clamp Mount 	Standard 1.7" Gap		
Freestanding 	No Gap		●
	4.0" Access Slot		●

Options Summary

Bracket Options

- Post
- Low Profile
- Offset Clamp
 - Compatible with all ESI accessories including desk clamp monitor arms and power accessories
- Desktop (Flush) Mount Clamp
- Freestanding

Acrylic Finish

- Clear
- Frosted

Screen Options (post, low profile and freestanding mounts only)

- No Gap
- 2.0" Gap
- 4.0" Gap

Configurations

- Single Screen
- U Shape Screen
- Custom

Dimensions

See pages 6, 10, 13, 16, 19, and 22 for availability per mount type

Screen Option Details



Screen thickness:

Clear: 0.24"

Frosted: 0.22"

Screen Material:

General purpose cast acrylic




Clear




Frosted

Bracket Option Details

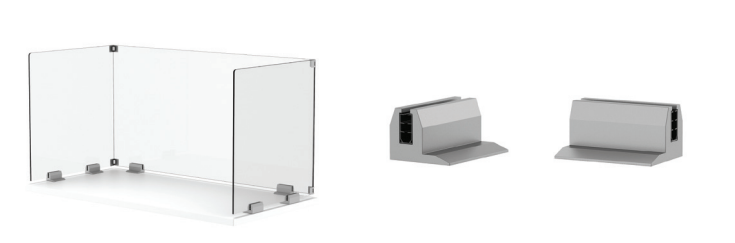
					
Post Mount (pages 4 – 10) • Mounts with adhesive or screws • Slots in acrylic fit into post mounts • Two post mounts required for each screen • Available for screens 24" - 36" in height and 24" - 72" in width • Available in silver, black, and white finish		Low Profile Mount (pages 11 – 13) • Mounts with adhesive • Adhere anywhere on desk • Two low profile mounts required for each screen • Only available for U Shape screens • Available for screens 24" - 30" in height and 24" - 72" in width • Available in silver, black, and white finish			
					
Offset Clamp Mount (pages 14 – 16) • Provides a 0.65" offset gap between back of worksurface and front of screen for desk clamped accessories and cords • Mounts along the edge of the worksurface • 0.44" gap between the top of the worksurface and the bottom of the screen • Clamp positioning on worksurface and screen can be varied if needed to accommodate mounted work tools • Clamp fits worksurfaces up to 1.33" thick • Two clamp mounts required for 24" - 48" wide screens • Three clamp mounts required for 60" and 72" wide screens • Available for screens 24" - 30" in height and 24" - 72" in width • Available in silver, black, and white finish		Desktop Clamp Mount (pages 17 – 19) • Positions screen flush with the edge of the worksurface • 1.73" gap between the top of the worksurface and the bottom of the screen for cords and wires • Clamp positioning on worksurface and screen can be varied if needed to accommodate mounted work tools • Clamp fits worksurfaces up to 1.33" thick • Two clamp mounts required for 24" - 48" wide screens • Three clamp mounts required for 60" and 72" wide screens • Available for screens 24" - 30" in height and 24" - 72" in width • Available in silver, black, and white finish		Freestanding Mount (pages 20 – 22) • Can be placed anywhere on surface • 0.250" gap from top of surface to bottom of screen • 2 foot brackets per screen for 48" wide and smaller • 4 foot brackets per screen for 60" wide and larger • Available for screens 24" and 30" in height and 24"-72" in width • Silver finish only	

Post Style Mount

Single protective screens



Acrylic Single screen | Post bracket |
No gap



Acrylic Single screen | Post bracket |
4.0" access slot



Post bracket available in Black (BLK), Silver (SLV), and White (WHT)

Acrylic screen model # breakdown:

ACRS-2424-NG-CLR-__-__-__

a b c d e f

a: type of screen
b: screen length
c: screen height
d: gapping
e: screen style
f: bracket finish

No Gap = NG
4" Access Gap = 4G

Clear Acrylic = CLR
Frosted Acrylic = FST

Black Finish = BLK
Silver Finish = SLV
White Finish = WHT

Product Specs

- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" (screens will be 3.375" shorter than worksurface)
- Available heights : 24.0", 30.0", 36.0" (height is measured from the top of worksurface to top of screen. Screens will be 0.75" shorter than nominal height shown)
- Brackets are available in black, silver and white finish
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- Available access opening:
 - No gap (NG)
 - 4.0" gap access slot
- Each screen comes with two brackets per section regardless of length
- Post brackets will include screw mounting hardware
- UL 94 Certified
- Minimum order requirements:
 - Standard screen sizes have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- Rounded edges and corners for user safety
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions
- Made of general purpose cast acrylic
- Not compatible with all clamp mounted monitor arms and power supplies. Contact customer service for more information
- Warranty: 5 yr

Cleaning/Care instructions

Clean with soap and water and a soft cloth, or non abrasive cleaners that do not contain ammonia. For more detailed cleaning instructions see page 20.

Post Style Mount

Single protective screens




Post style bracket | Acrylic Single screen

Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping
No gap - NG or 4.0" gap access slot - 4G				
ACRS	Clear	Post style	24.0"l x 24.0"h	ACRS-2424-__-CLR-__ LT
			30.0"l x 24.0"h	ACRS-3024-__-CLR-__ LT
			36.0"l x 24.0"h	ACRS-3624-__-CLR-__ LT
			48.0"l x 24.0"h	ACRS-4824-__-CLR-__ LT
			60.0"l x 24.0"h	ACRS-6024-__-CLR-__ LT
			72.0"l x 24.0"h	ACRS-7224-__-CLR-__ LT
			24.0"l x 30.0"h	ACRS-2430-__-CLR-__ LT
			30.0"l x 30.0"h	ACRS-3030-__-CLR-__ LT
			36.0"l x 30.0"h	ACRS-3630-__-CLR-__ LT
			48.0"l x 30.0"h	ACRS-4830-__-CLR-__ LT
			60.0"l x 30.0"h	ACRS-6030-__-CLR-__ LT
			72.0"l x 30.0"h	ACRS-7230-__-CLR-__ LT
	Frosted	Post style	24.0"l x 36.0"h	ACRS-2436-__-CLR-__ LT
			30.0"l x 36.0"h	ACRS-3036-__-CLR-__ LT
			36.0"l x 36.0"h	ACRS-3636-__-CLR-__ LT
			48.0"l x 36.0"h	ACRS-4836-__-CLR-__ LT
			60.0"l x 36.0"h	ACRS-6036-__-CLR-__ LT
			72.0"l x 36.0"h	ACRS-7236-__-CLR-__ LT
		Post style	24.0"l x 24.0"h	ACRS-2424-__-FST-__ LT
			30.0"l x 24.0"h	ACRS-3024-__-FST-__ LT
			36.0"l x 24.0"h	ACRS-3624-__-FST-__ LT
			48.0"l x 24.0"h	ACRS-4824-__-FST-__ LT
			60.0"l x 24.0"h	ACRS-6024-__-FST-__ LT
			72.0"l x 24.0"h	ACRS-7224-__-FST-__ LT
			24.0"l x 30.0"h	ACRS-2430-__-FST-__ LT
			30.0"l x 30.0"h	ACRS-3030-__-FST-__ LT
			36.0"l x 30.0"h	ACRS-3630-__-FST-__ LT
			48.0"l x 30.0"h	ACRS-4830-__-FST-__ LT
			60.0"l x 30.0"h	ACRS-6030-__-FST-__ LT
			72.0"l x 30.0"h	ACRS-7230-__-FST-__ LT
		Post style	24.0"l x 36.0"h	ACRS-2436-__-FST-__ LT
			30.0"l x 36.0"h	ACRS-3036-__-FST-__ LT
			36.0"l x 36.0"h	ACRS-3636-__-FST-__ LT
			48.0"l x 36.0"h	ACRS-4836-__-FST-__ LT
			60.0"l x 36.0"h	ACRS-6036-__-FST-__ LT
			72.0"l x 36.0"h	ACRS-7236-__-FST-__ LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.


Acrylic screen lengths and heights

Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" nominal

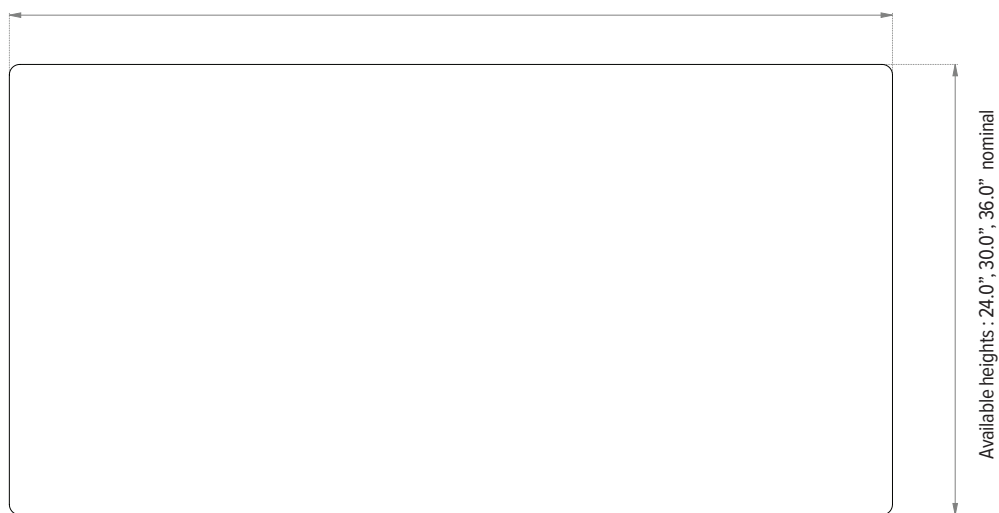


Clear: 0.24"
Frosted: 0.22"


Acrylic Single screen | Post bracket | 4.0" gap access slot (4G)

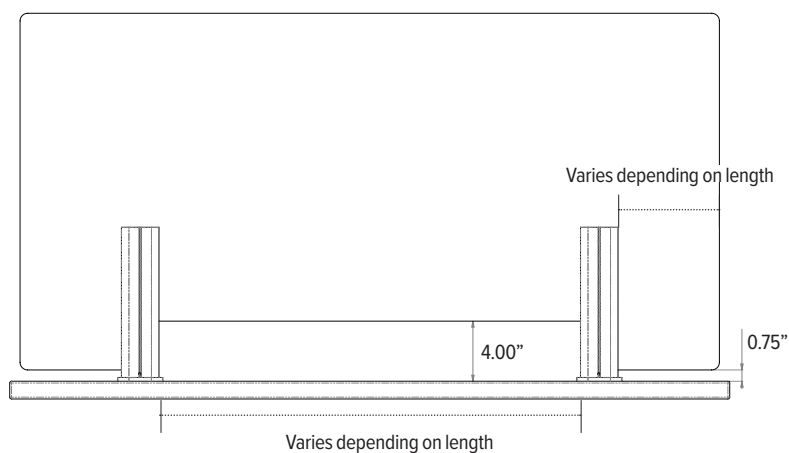

Post bracket

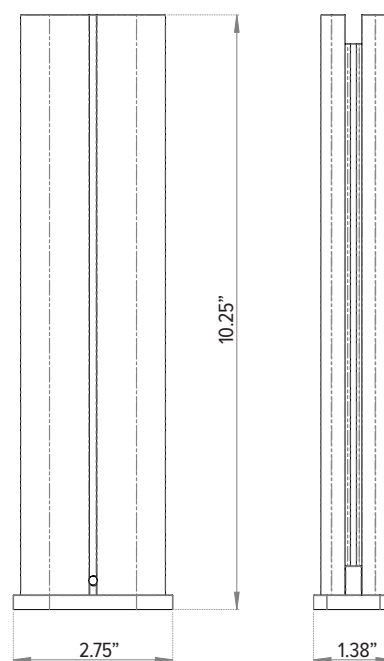

Acrylic Single screen | Post bracket | No gap (NG)

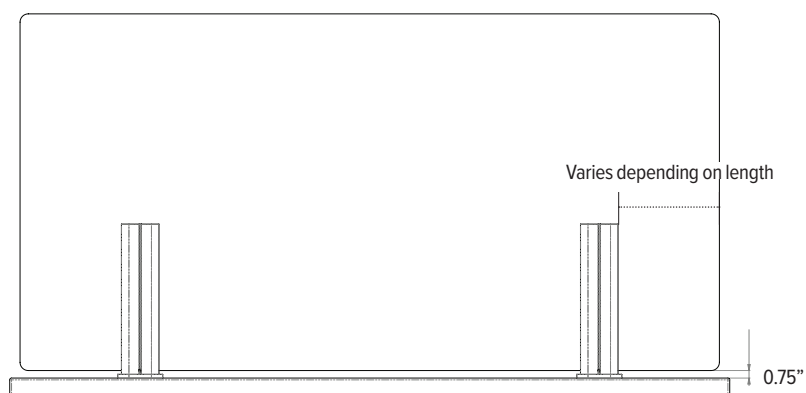

Post Style Mount


U Shape protective screens



Acrylic U Shape screen | Post bracket |
No gap



Acrylic U Shape screen | Post bracket |
2.0" gap

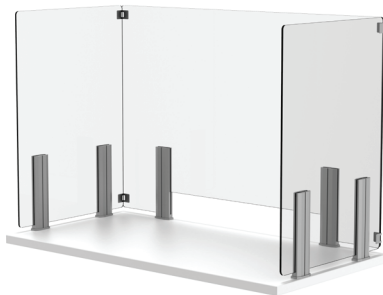

Acrylic U Shape screen | Post bracket |
4.0" access slot



Post bracket available in Black (BLK), Silver (SLV), and White (WHT)

Product Specs

- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 36.0", 48.0", 60.0", and 72.0" (screens will be 3.375" shorter than worksurface)
- Available heights: 24.0", 30.0", 36.0"*(*post bracket only) (height are measured from the top of worksurface to top of screen. Screens will be 0.75" shorter than nominal height shown for no gap and 4.0" gap versions. Screens will be 2.0" shorter than nominal height shown for 2.0" gap version)
- Corner brackets are provided for U shape configurations
- Brackets are available in black, silver and white finish, the corner bracket finish matches the main bracket finish
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- Available access opening:
 - No gap (NG)
 - 2.0" gap (2G)
 - 4.0" gap access slot (4G)
- Each screen comes with two brackets per section regardless of length
- Bracket attachment methods:
 - Post brackets will include adhesive and screw mounting hardware options
- Minimum order requirements:
 - Standard screen sizes have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- UL 94 Certified
- Rounded edges and corners for user safety
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions
- Made of general purpose cast acrylic
- Not compatible with all clamp mounted monitor arms and power supplies. Contact customer service for more information
- Warranty: 5 yr

Cleaning/Care instructions

Clean with soap and water and a soft cloth, or non abrasive cleaners that do not contain ammonia. For more detailed cleaning instructions see page 20.

Post Style Mount

U Shape protective screens



Acrylic screen model # breakdown:

ACRU-362424-NG-PST-FST-__-__-__

a b c d e f g h

a: type of screen
b: screen length
c: screen depth
d: screen height
e: gapping
f: bracket style
g: screen style
h: bracket finish

No Gap = NG
2" Gap = 2G
4" Access Gap = 4G
Clear Acrylic = CLR
Frosted Acrylic = FST
Black Finish = BLK
Silver Finish = SLV
White Finish = WHT

Post style bracket | U Shape Acrylic Screen

Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping
No gap - NG or 2.0" gap - 2G or 4.0" gap access slot - 4G				
ACRU	Clear	Post style bracket	36.0"l x 24.0"d x 24.0"h	ACRU-362424-__-PST-CLR-__-__-__ LT
			48.0"l x 24.0"d x 24.0"h	ACRU-482424-__-PST-CLR-__-__-__ LT
			60.0"l x 24.0"d x 24.0"h	ACRU-602424-__-PST-CLR-__-__-__ LT
			72.0"l x 24.0"d x 24.0"h	ACRU-722424-__-PST-CLR-__-__-__ LT
			36.0"l x 30.0"d x 24.0"h	ACRU-363024-__-PST-CLR-__-__-__ LT
			48.0"l x 30.0"d x 24.0"h	ACRU-483024-__-PST-CLR-__-__-__ LT
			60.0"l x 30.0"d x 24.0"h	ACRU-603024-__-PST-CLR-__-__-__ LT
			72.0"l x 30.0"d x 24.0"h	ACRU-723024-__-PST-CLR-__-__-__ LT
			36.0"l x 24.0"d x 30.0"h	ACRU-362430-__-PST-CLR-__-__-__ LT
			48.0"l x 24.0"d x 30.0"h	ACRU-482430-__-PST-CLR-__-__-__ LT
			60.0"l x 24.0"d x 30.0"h	ACRU-602430-__-PST-CLR-__-__-__ LT
			72.0"l x 24.0"d x 30.0"h	ACRU-722430-__-PST-CLR-__-__-__ LT
			36.0"l x 30.0"d x 30.0"h	ACRU-363030-__-PST-CLR-__-__-__ LT
			48.0"l x 30.0"d x 30.0"h	ACRU-483030-__-PST-CLR-__-__-__ LT
			60.0"l x 30.0"d x 30.0"h	ACRU-603030-__-PST-CLR-__-__-__ LT
			72.0"l x 30.0"d x 30.0"h	ACRU-723030-__-PST-CLR-__-__-__ LT
			36.0"l x 24.0"d x 36.0"h	ACRU-362436-__-PST-CLR-__-__-__ LT
			48.0"l x 24.0"d x 36.0"h	ACRU-482436-__-PST-CLR-__-__-__ LT
			60.0"l x 24.0"d x 36.0"h	ACRU-602436-__-PST-CLR-__-__-__ LT
			72.0"l x 24.0"d x 36.0"h	ACRU-722436-__-PST-CLR-__-__-__ LT
			36.0"l x 30.0"d x 36.0"h	ACRU-363036-__-PST-CLR-__-__-__ LT
			48.0"l x 30.0"d x 36.0"h	ACRU-483036-__-PST-CLR-__-__-__ LT
			60.0"l x 30.0"d x 36.0"h	ACRU-603036-__-PST-CLR-__-__-__ LT
			72.0"l x 30.0"d x 36.0"h	ACRU-723036-__-PST-CLR-__-__-__ LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.

Post Style Mount

U Shape protective screens




Post style bracket | U Shape Acrylic Screen

Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping
No gap - NG or 2.0" gap - 2G or 4.0" gap access slot - 4G				
ACRU	Frosted	Post style bracket	36.0"l x 24.0"d x 24.0"h	ACRU-362424-__-PST-FST-___ LT
			48.0"l x 24.0"d x 24.0"h	ACRU-482424-__-PST-FST-___ LT
			60.0"l x 24.0"d x 24.0"h	ACRU-602424-__-PST-FST-___ LT
			72.0"l x 24.0"d x 24.0"h	ACRU-722424-__-PST-FST-___ LT
			36.0"l x 30.0"d x 24.0"h	ACRU-363024-__-PST-FST-___ LT
			48.0"l x 30.0"d x 24.0"h	ACRU-483024-__-PST-FST-___ LT
			60.0"l x 30.0"d x 24.0"h	ACRU-603024-__-PST-FST-___ LT
			72.0"l x 30.0"d x 24.0"h	ACRU-723024-__-PST-FST-___ LT
			36.0"l x 24.0"d x 30.0"h	ACRU-362430-__-PST-FST-___ LT
			48.0"l x 24.0"d x 30.0"h	ACRU-482430-__-PST-FST-___ LT
			60.0"l x 24.0"d x 30.0"h	ACRU-602430-__-PST-FST-___ LT
			72.0"l x 24.0"d x 30.0"h	ACRU-722430-__-PST-FST-___ LT
			36.0"l x 30.0"d x 30.0"h	ACRU-363030-__-PST-FST-___ LT
			48.0"l x 30.0"d x 30.0"h	ACRU-483030-__-PST-FST-___ LT
			60.0"l x 30.0"d x 30.0"h	ACRU-603030-__-PST-FST-___ LT
			72.0"l x 30.0"d x 30.0"h	ACRU-723030-__-PST-FST-___ LT
			36.0"l x 24.0"d x 36.0"h	ACRU-362436-__-PST-FST-___ LT
			48.0"l x 24.0"d x 36.0"h	ACRU-482436-__-PST-FST-___ LT
			60.0"l x 24.0"d x 36.0"h	ACRU-602436-__-PST-FST-___ LT
			72.0"l x 24.0"d x 36.0"h	ACRU-722436-__-PST-FST-___ LT
			36.0"l x 30.0"d x 36.0"h	ACRU-363036-__-PST-FST-___ LT
			48.0"l x 30.0"d x 36.0"h	ACRU-483036-__-PST-FST-___ LT
			60.0"l x 30.0"d x 36.0"h	ACRU-603036-__-PST-FST-___ LT
			72.0"l x 30.0"d x 36.0"h	ACRU-723036-__-PST-FST-___ LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.


Main Acrylic screen

Available lengths: 30.0", 36.0", 48.0", 60.0", and 72.0" nominal

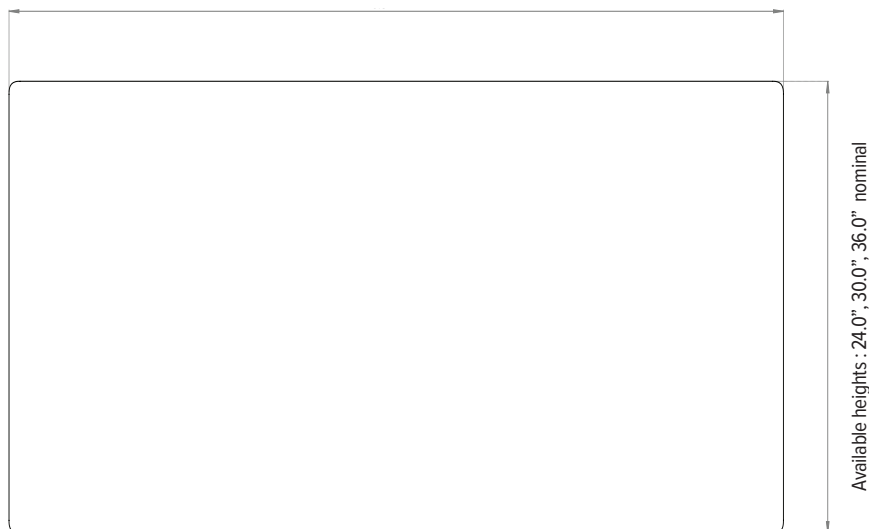


Side Acrylic screen


Available depths: 24.0", 30.0" nominal

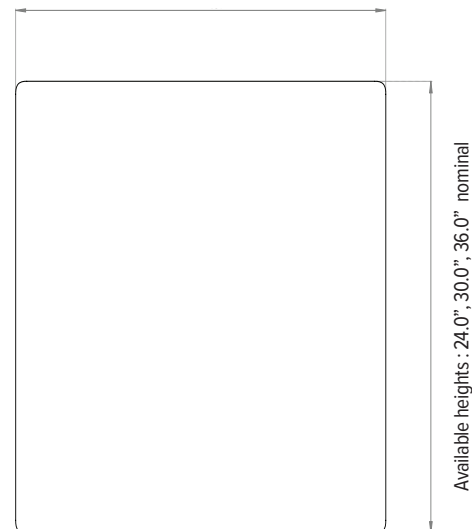


Acrylic screen thickness




Acrylic U Shape screen | Post bracket | 4.0" gap access slot

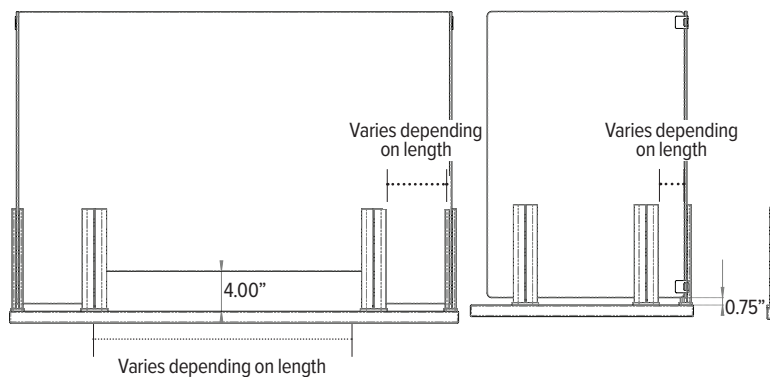


Acrylic U Shape screen | Post bracket | 2.0" gap

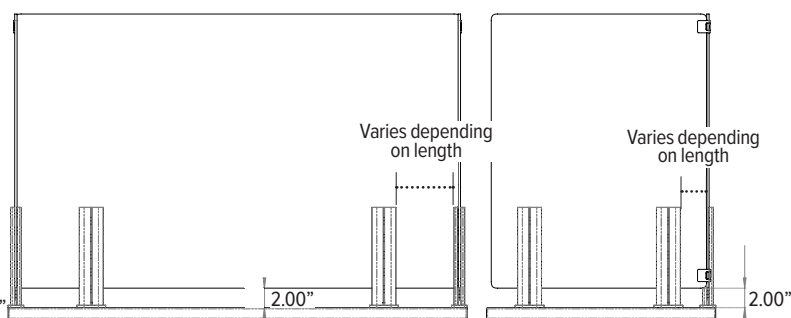

Acrylic U Shape screen | Post bracket | no gap

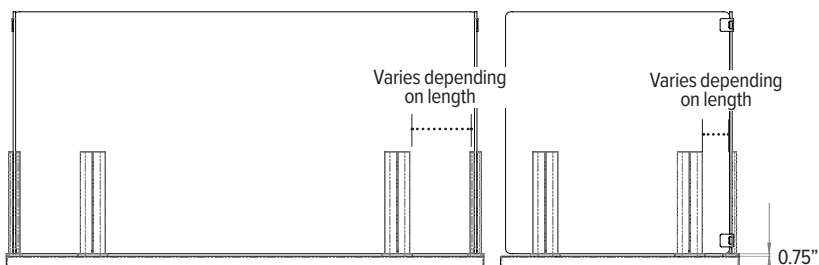

Post bracket

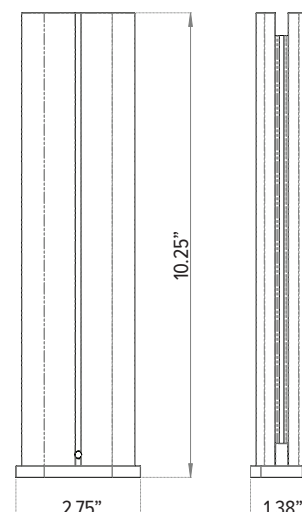

Post Style Mount Compatible ESI products

All monitor arms are compatible with all screens if grommet mounted. Desk clamp compatibility can be found below:

Monitor arms		Post style bracket		
KataEX series	No gap	2.0" gap	4.0" access slot	
All single configurations	●	—	●	
All double configurations	●	—	●	
All triple configurations	●	—	●	
All quad configurations	●	—	●	
All six configurations	●	—	●	
Kata series				
Kata	●	—	●	
Kata2	●	—	●	
Kata2-MS	●	—	●	
Evolve series	*Note: Only when the mounting stems to the pole are at 180 and 90 degrees to the post			
All single configurations	—	—	—	
All double configurations	—	—	—	
All triple configurations	—	—	—	
All quad configurations	—	—	—	
All six configurations	—	—	—	
Edge series				
Edge	—	—	—	
Edge2	—	—	—	
Edge2-MS	—	—	—	
Edge-Max	—	—	—	
Edge2-Max	—	—	—	
Edge-Max-Dual	—	—	—	
SenaEX series				
All single configurations	—	—	—	
All double configurations	—	—	—	
All triple configurations	—	—	—	
Sena series				
Sena	—	—	—	
Sena2	—	—	—	
Eppa series				
Eppa	—	—	●	
Eppa2	—	—	●	
Power solutions		Post style bracket		
Desktop/Tabletop power	No gap	2.0" gap	4.0" access slot	
FlexCharge9	—	●	●	
FlexCharge4CX	—	●	●	
FlexCharge4C	—	●	●	
FlexCharge4	—	●	●	
FlexCharge3	—	●	●	

Low Profile Style Mount

U Shape protective screens



Acrylic U Shape screen | Low profile bracket |
No gap



Acrylic U Shape screen | Low profile bracket |
4.0" access slot



Low profile bracket available in Black (BLK), Silver (SLV), and White (WHT)

Acrylic screen model # breakdown:

ACRU-362424-NG-LPF-FST-__

a

b

c

d

e

f

g

h

a: type of screen

b: screen length

c: screen depth

d: screen height

e: gapping

f: bracket style

g. screen style

h. bracket finish

No Gap = NG

4" Access Gap = 4G

Clear Acrylic = CLR

Frosted Acrylic = FST

Black Finish = BLK

Silver Finish = SLV

White Finish = WHT

Product Specs

- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 36.0", 48.0", 60.0", and 72.0" (screens will be 3.375" shorter than worksurface)
- Available heights: 24.0", 30.0", (height is measured from the top of worksurface to top of screen. Screens will be 0.75" shorter than nominal height shown for no gap and 4.0" gap versions.)
- Corner brackets are provided for U shape configurations
- Brackets are available in black, silver and white finish, the corner bracket finish matches the main bracket finish
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- Available access opening:
 - No gap (NG)
 - 4.0" gap access slot (4G)
- Each screen comes with two brackets per section regardless of length
- Bracket attachment methods:
 - Low profile bracket will include adhesive only
- Minimum order requirements:
 - Standard screen sizes have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- UL 94 Certified
- Rounded edges and corners for user safety.
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions.
- Made of general purpose cast acrylic
- Not compatible with all clamp mounted monitor arms and power supplies. Contact customer service for more information
- Warranty: 5 yr

Cleaning/Care instructions

Clean with soap and water and a soft cloth, or non abrasive cleaners that do not contain ammonia. For more detailed cleaning instructions see page 20.

Low Profile Style Mount

U Shape protective screens



Low profile style bracket | U Shape Acrylic Screen


Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping	
				No gap - NG or 4.0" gap access slot - 4G	
ACRU	Clear	Low profile style bracket	36.0"l x 24.0"d x 24.0"h	ACRU-362424-__-LPF-CLR-__	LT
			48.0"l x 24.0"d x 24.0"h	ACRU-482424-__-LPF-CLR-__	LT
			60.0"l x 24.0"d x 24.0"h	ACRU-602424-__-LPF-CLR-__	LT
			72.0"l x 24.0"d x 24.0"h	ACRU-722424-__-LPF-CLR-__	LT
			36.0"l x 30.0"d x 24.0"h	ACRU-363024-__-LPF-CLR-__	LT
			48.0"l x 30.0"d x 24.0"h	ACRU-483024-__-LPF-CLR-__	LT
			60.0"l x 30.0"d x 24.0"h	ACRU-603024-__-LPF-CLR-__	LT
			72.0"l x 30.0"d x 24.0"h	ACRU-723024-__-LPF-CLR-__	LT
			36.0"l x 24.0"d x 30.0"h	ACRU-362430-__-LPF-CLR-__	LT
			48.0"l x 24.0"d x 30.0"h	ACRU-482430-__-LPF-CLR-__	LT
			60.0"l x 24.0"d x 30.0"h	ACRU-602430-__-LPF-CLR-__	LT
			72.0"l x 24.0"d x 30.0"h	ACRU-722430-__-LPF-CLR-__	LT
			36.0"l x 30.0"d x 30.0"h	ACRU-363030-__-LPF-CLR-__	LT
			48.0"l x 30.0"d x 30.0"h	ACRU-483030-__-LPF-CLR-__	LT
			60.0"l x 30.0"d x 30.0"h	ACRU-603030-__-LPF-CLR-__	LT
			72.0"l x 30.0"d x 30.0"h	ACRU-723030-__-LPF-CLR-__	LT

Low profile style bracket | U Shape Acrylic Screen


Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping	
				No gap - NG or 4.0" gap access slot - 4G	
ACRU	Frosted	Low profile style bracket	36.0"l x 24.0"d x 24.0"h	ACRU-362424-__-LPF-FST-__	LT
			48.0"l x 24.0"d x 24.0"h	ACRU-482424-__-LPF-FST-__	LT
			60.0"l x 24.0"d x 24.0"h	ACRU-602424-__-LPF-FST-__	LT
			72.0"l x 24.0"d x 24.0"h	ACRU-72424-__-LPF-FST-__	LT
			36.0"l x 30.0"d x 24.0"h	ACRU-363024-__-LPF-FST-__	LT
			48.0"l x 30.0"d x 24.0"h	ACRU-483024-__-LPF-FST-__	LT
			60.0"l x 30.0"d x 24.0"h	ACRU-603024-__-LPF-FST-__	LT
			72.0"l x 30.0"d x 24.0"h	ACRU-723024-__-LPF-FST-__	LT
			36.0"l x 24.0"d x 30.0"h	ACRU-362430-__-LPF-FST-__	LT
			48.0"l x 24.0"d x 30.0"h	ACRU-482430-__-LPF-FST-__	LT
			60.0"l x 24.0"d x 30.0"h	ACRU-602430-__-LPF-FST-__	LT
			72.0"l x 24.0"d x 30.0"h	ACRU-722430-__-LPF-FST-__	LT
			36.0"l x 30.0"d x 30.0"h	ACRU-363030-__-LPF-FST-__	LT
			48.0"l x 30.0"d x 30.0"h	ACRU-483030-__-LPF-FST-__	LT
			60.0"l x 30.0"d x 30.0"h	ACRU-603030-__-LPF-FST-__	LT
			72.0"l x 30.0"d x 30.0"h	ACRU-723030-__-LPF-FST-__	LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.


Acrylic U Shape screen | Low profile bracket | 4.0" gap access slot

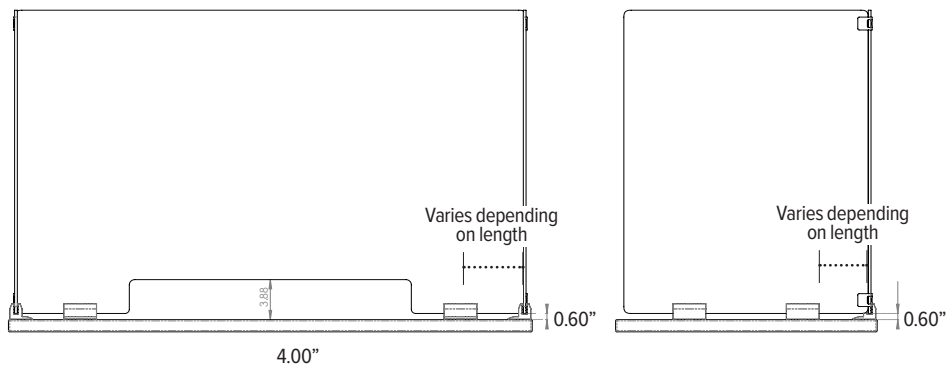

Acrylic U Shape screen | Low profile bracket | no gap

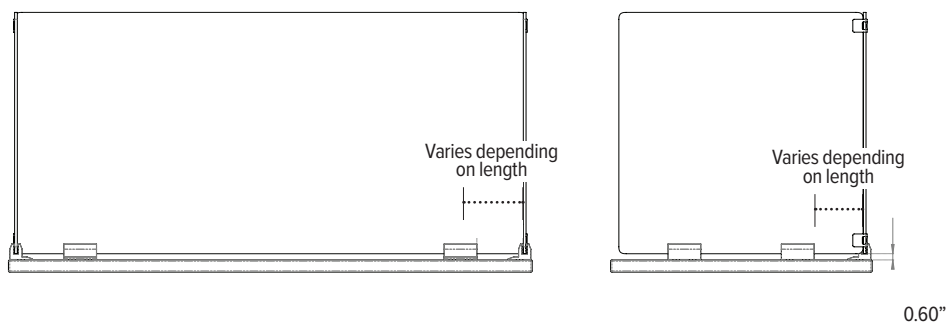

Low Profile bracket

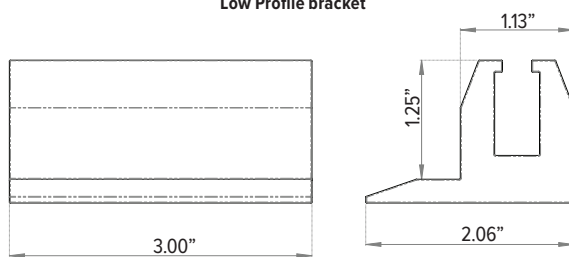

Low Profile Mount Compatible ESI products

All monitor arms are compatible with all screens if grommet mounted. Desk clamp compatibility can be found below:

**Note for all Monitor Arm Series listed below: Extension Arms will not be able to be placed beyond the back edge of the work surface

Monitor arms		Low profile style bracket	
KataEX series	No gap	4.0" access slot	
All single configurations	●	●	
All double configurations	●	●	
All triple configurations	●	●	
All quad configurations	●	●	
All six configurations	●	●	
Kata series			
Kata	●	●	
Kata2	●	●	
Kata2-MS	●	●	
Evolve series	*Note: Only when the mounting stems to the pole are at 180 and 90 degrees to the post		
All single configurations	●*	●*	
All double configurations	●*	●*	
All triple configurations	●*	●*	
All quad configurations	●*	●*	
All six configurations	●*	●*	
Edge series			
Edge	—	—	
Edge2	—	—	
Edge2-MS	—	—	
Edge-Max	—	—	
Edge2-Max	—	—	
Edge-Max-Dual	—	—	
SenaEX series			
All single configurations	—	●	
All double configurations	—	●	
All triple configurations	—	●	
Sena series			
Sena	—	●	
Sena2	—	●	
Eppa Series			
Eppa	—	●	
Eppa2	—	●	
Power solutions		Low profile style bracket	
Desktop/Tabletop power	No gap	4.0" access slot	
FlexCharge9	—	●	
FlexCharge4CX	—	●	
FlexCharge4C	—	●	
FlexCharge4	—	●	
FlexCharge3	—	●	

Offset Clamp Style Mount



Protective screens



Offset mounting bracket allows for clamp on monitor arms and power supplies



Shown with clamp mounted monitor arm and power supply



24" - 48" screen lengths include 2 mounting brackets



60" and 72" screen lengths include 3 mounting brackets



U Shape screens can be built by ordering 3 individual screens



*U Shape screens can be built from the Model Numbers on the following page



Corner brackets recommended for U Shape configurations. Must be ordered separately.

Corner Joining Brackets (Set of two)

Model #	List price
ACR-CRNRBKT-SET-__ _	\$46

Note: Corner joining brackets ship as a set of two. A total of four corner joining brackets are needed for U Shape configurations so two sets should be ordered

Product Specs

- Accommodates ESI clamp mount accessories
- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" (screens will be 3/8" shorter than worksurface)
- Available heights: 24.0" and 30.0" (height is measured from the top of the worksurface to top of screen. Screens will be 0.75" shorter than nominal height shown)
- Bracket:
 - Offset clamp bracket
 - Corner joining brackets are suggested whenever a side screen and main screen are installed together
 - Corner joining brackets must be ordered separately (see Corner Joining Bracket ordering information below)
- Clamp brackets are available in black, silver and white finish. Corner joining brackets available in black, silver and white finish to match main brackets
- Offset brackets position screens 0.65" back from the worksurface to allow for clamp-on accessories and wires
- 0.44" gap between the top of the worksurface and the bottom of the screen
- Clamp brackets are compatible with worksurfaces up to 1.33" in thickness
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- 24.0", 30.0", 36.0" and 48.0" screens come with two worksurface mounting brackets, 60.0" and 72.0" screens come with three mounting brackets
- Minimum order requirements:
 - Standard screens have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- Rounded corners and edges for user safety
- UL 94 Certified
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions
- Made of general purpose cast acrylic
- Offset mounting brackets allow for clamp on monitor arms and power supplies
- Warranty: 5 yr

Offset Clamp Style Mount



Protective screens

Acrylic screen model # breakdown:

ACRO-2424-CLR-__-__-__

| | | | |

a b c d e

a: type of screen

b: screen length

c: screen height

d: screen style

e: bracket finish

Clear Acrylic = CLR

Frosted Acrylic = FST

Brackets available in BLK, SLV, WHT finish (__-__)








Offset Clamp Style Bracket | Acrylic Single Screen

Acrylic screen type	Acrylic Style	Screen dimension	Model Number	
ACRO	Clear	24.0"l x 24.0"h	ACRO-2424-CLR-__-__-__	LT
		30.0"l x 24.0"h	ACRO-3024-CLR-__-__-__	LT
		36.0"l x 24.0"h	ACRO-3624-CLR-__-__-__	LT
		48.0"l x 24.0"h	ACRO-4824-CLR-__-__-__	LT
		60.0"l x 24.0"h	ACRO-6024-CLR-__-__-__	LT
		72.0"l x 24.0"h	ACRO-7224-CLR-__-__-__	LT
	Frosted	24.0"l x 30.0"h	ACRO-2430-CLR-__-__-__	LT
		30.0"l x 30.0"h	ACRO-3030-CLR-__-__-__	LT
		36.0"l x 30.0"h	ACRO-3630-CLR-__-__-__	LT
		48.0"l x 30.0"h	ACRO-4830-CLR-__-__-__	LT
		60.0"l x 30.0"h	ACRO-6030-CLR-__-__-__	LT
		72.0"l x 30.0"h	ACRO-7230-CLR-__-__-__	LT
		24.0"l x 24.0"h	ACRO-2424-FST-__-__-__	LT
		30.0"l x 24.0"h	ACRO-3024-FST-__-__-__	LT
		36.0"l x 24.0"h	ACRO-3624-FST-__-__-__	LT
		48.0"l x 24.0"h	ACRO-4824-FST-__-__-__	LT
		60.0"l x 24.0"h	ACRO-6024-FST-__-__-__	LT
		72.0"l x 24.0"h	ACRO-7224-FST-__-__-__	LT
		24.0"l x 30.0"h	ACRO-2430-FST-__-__-__	LT
		30.0"l x 30.0"h	ACRO-3030-FST-__-__-__	LT
		36.0"l x 30.0"h	ACRO-3630-FST-__-__-__	LT
		48.0"l x 30.0"h	ACRO-4830-FST-__-__-__	LT
		60.0"l x 30.0"h	ACRO-6030-FST-__-__-__	LT
		72.0"l x 30.0"h	ACRO-7230-FST-__-__-__	LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.

Acrylic screen lengths and heights

Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" nominal

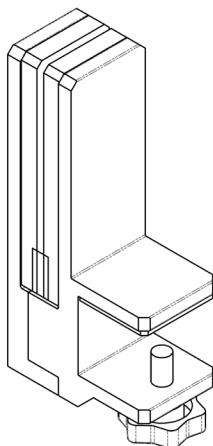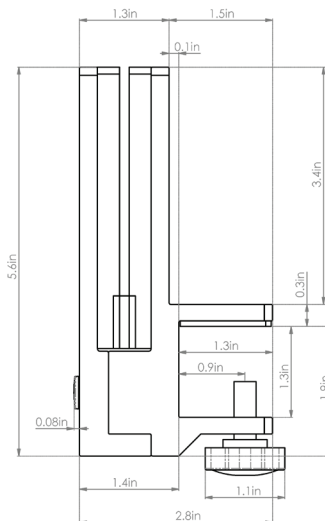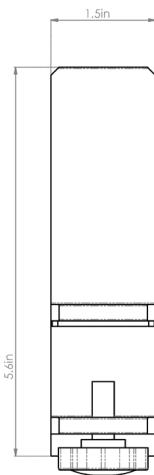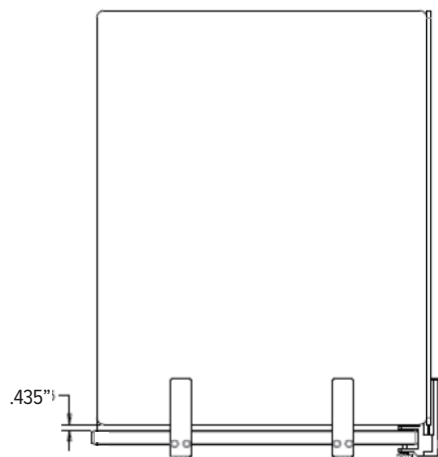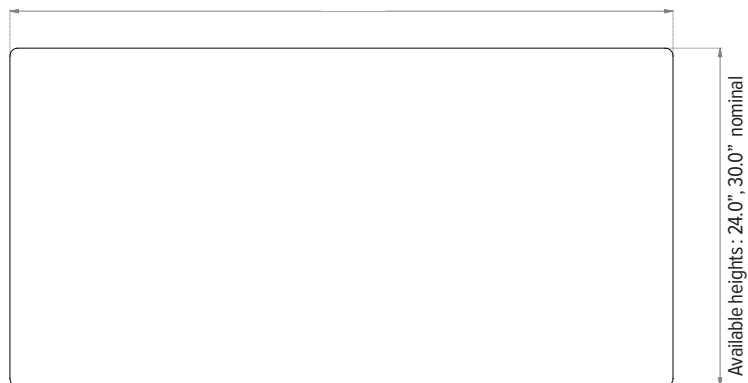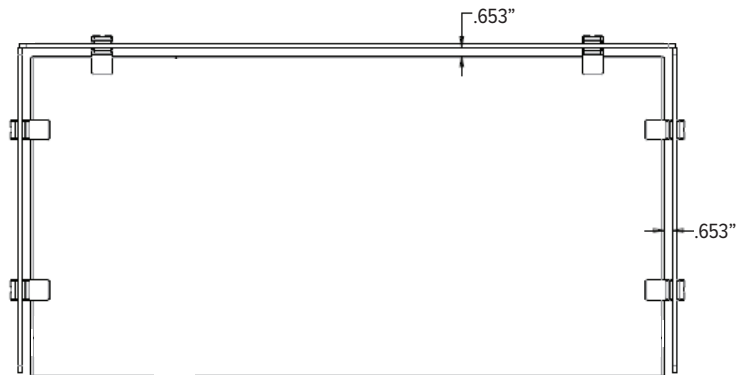

Desktop Clamp Style Mount



Protective screens



Flush mount bracket option provides optimal protection between users



24"- 48" screen lengths include 2 mounting brackets



60" and 72" screen lengths include 3 mounting brackets



U Shape screens can be built by ordering 3 individual screens



***U-Shape screens can be built from the Model Numbers on the following page**



Corner brackets recommended for U Shape configurations. Must be ordered separately.

Corner Joining Brackets (Set of 2)

Model #	List price
ACR-CRNRBRKT-SET-__ _	\$46

Note: Corner joining brackets ship as a set of two. A total of four corner joining brackets are needed for U Shape configurations so two sets should be ordered

Product Specs

- Product Specs
- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" (*screens will be 3/8" shorter than worksurface*)
- Available heights: 24.0" and 30.0" (*height is measured from the top of the worksurface to top of screen. Screens will be 0.75" shorter than nominal height shown*)
- Bracket:
 - Desktop clamp bracket
 - Corner joining brackets are suggested whenever a side screen and main screen are installed together
 - Corner joining brackets must be ordered separately (see model number information below)
- Brackets are available in black, silver, and white finish, the corner joining bracket finish available in black, silver and white to match main brackets
- Desktop Clamp brackets position screens 1.73" above the worksurface to allow for wires
- Brackets are compatible with worksurfaces up to 1.33" in thickness
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- 24.0", 30.0", 36.0" and 48.0" screens come with two worksurface mounting brackets, 60.0" and 72.0" screens come with three mounting brackets
- Minimum order requirements:
 - Standard screens have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- Rounded corners and edges for user safety
- UL 94 Certified
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions
- Made of general purpose cast acrylic
- Not compatible with clamp on monitor arms and power supplies. Contact customer service for more information
- Warranty: 5 yr

Desktop Clamp Style Mount



Protective screens

Acrylic screen model # breakdown:

ACRD-2424-CLR-__-__-__

a b c d e

a: type of screen

b: screen length

c: screen height

d: screen style

e: bracket finish

Clear Acrylic = CLR

Frosted Acrylic = FST

Brackets available in BLK, SLV, WHT finish (__-__-__)






Desktop Clamp Style Bracket | Acrylic Single Screen

Acrylic screen type	Acrylic Style	Screen dimension	Model Number	
ACRD	Clear	24.0"l x 24.0"h	ACRD-2424-CLR-__-__-__	LT
		30.0"l x 24.0"h	ACRD-3024-CLR-__-__-__	LT
		36.0"l x 24.0"h	ACRD-3624-CLR-__-__-__	LT
		48.0"l x 24.0"h	ACRD-4824-CLR-__-__-__	LT
		60.0"l x 24.0"h	ACRD-6024-CLR-__-__-__	LT
		72.0"l x 24.0"h	ACRD-7224-CLR-__-__-__	LT
		24.0"l x 30.0"h	ACRD-2430-CLR-__-__-__	LT
		30.0"l x 30.0"h	ACRD-3030-CLR-__-__-__	LT
		36.0"l x 30.0"h	ACRD-3630-CLR-__-__-__	LT
		48.0"l x 30.0"h	ACRD-4830-CLR-__-__-__	LT
		60.0"l x 30.0"h	ACRD-6030-CLR-__-__-__	LT
		72.0"l x 30.0"h	ACRD-7230-CLR-__-__-__	LT
	Frosted	24.0"l x 24.0"h	ACRD-2424-FST-__-__-__	LT
		30.0"l x 24.0"h	ACRD-3024-FST-__-__-__	LT
		36.0"l x 24.0"h	ACRD-3624-FST-__-__-__	LT
		48.0"l x 24.0"h	ACRD-4824-FST-__-__-__	LT
		60.0"l x 24.0"h	ACRD-6024-FST-__-__-__	LT
		72.0"l x 24.0"h	ACRD-7224-FST-__-__-__	LT
		24.0"l x 30.0"h	ACRD-2430-FST-__-__-__	LT
		30.0"l x 30.0"h	ACRD-3030-FST-__-__-__	LT
		36.0"l x 30.0"h	ACRD-3630-FST-__-__-__	LT
		48.0"l x 30.0"h	ACRD-4830-FST-__-__-__	LT
		60.0"l x 30.0"h	ACRD-6030-FST-__-__-__	LT
		72.0"l x 30.0"h	ACRD-7230-FST-__-__-__	LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.

Acrylic screen lengths and heights

Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" nominal

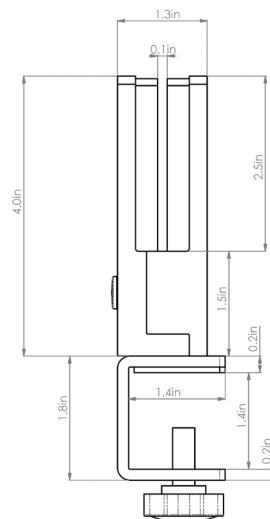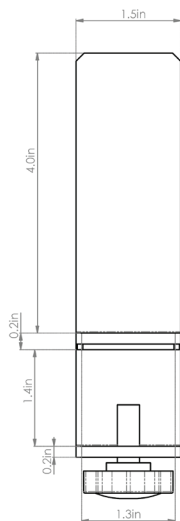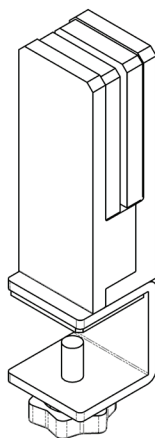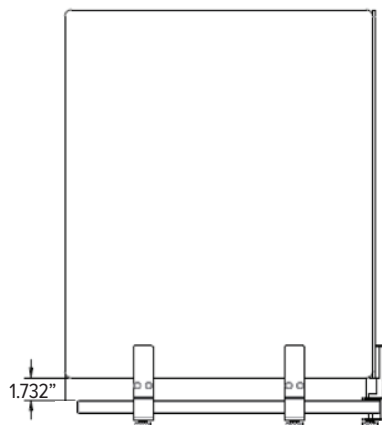

Freestanding

Protective screens



Acrylic single screen | Freestanding |
No gap



Acrylic single screen | Freestanding |
4.0" access slot



Freestanding feet available in Silver (SLV) only

ACRF-2424-NG-CLR-SLV



a: type of screen
b: screen length
c: screen height
d: gapping
e: screen style
f: bracket finish

No Gap = NG
4" Access Gap = 4G

Clear Acrylic = CLR
Frosted Acrylic = FST

Silver Finish = SLV

Product Specs

- Quickly retrofit an existing workspace
- Provides separation and peace of mind when coming back to the office
- Available lengths: 24.0", 30.0", 36.0", 48.0", 60.0", and 72.0" (screens will be 3.375" shorter than worksurface)
- Available heights: 24.0" and 30.0" (height is measured from the top of worksurface to top of screen. Screens will be 0.25" shorter than nominal height shown)
- Brackets are available in silver finish only
- Available screen styles: Clear and Frosted
- Screen thickness:
 - Clear: 0.24" (CLR)
 - Frosted: 0.22" (FST)
- Available access opening:
 - No gap (NG)
 - 4.0" gap access slot (access slot is approximately 4.25" in height and widths vary depending on screen size)
- 48" screens and smaller include two foot brackets, 60" screen and larger include 4 foot brackets
- Foot brackets will include adhesive to secure to surface if desired
- UL 94 Certified
- Minimum order requirements:
 - Standard screen sizes have NO minimum order qty
 - Custom orders will be assessed on a case-by-case basis depending on the size
- Rounded edges and corners for user safety
- Lead time 2-4 weeks, pending acrylic is available
- Custom options available, contact our Customer Service Department with questions
- Made of general purpose cast acrylic

Cleaning/Care instructions

Clean with soap and water and a soft cloth, or non abrasive cleaners that do not contain ammonia. For more detailed cleaning instructions see page 20.

Freestanding


Single protective screens



Freestanding | Acrylic Single screen

Acrylic screen type	Acrylic style	Bracket type	Screen dimension	Gapping	
ACRF	Clear	Freestanding		No gap - NG or 4.0" gap access slot - 4G	
			24.0"l x 24.0"h	ACRF-2424-__-CLR-__	LT
			30.0"l x 24.0"h	ACRF-3024-__-CLR-__	LT
			36.0"l x 24.0"h	ACRF-3624-__-CLR-__	LT
			48.0"l x 24.0"h	ACRF-4824-__-CLR-__	LT
			60.0"l x 24.0"h	ACRF-6024-__-CLR-__	LT
			72.0"l x 24.0"h	ACRF-7224-__-CLR-__	LT
			24.0"l x 30.0"h	ACRF-2430-__-CLR-__	LT
			30.0"l x 30.0"h	ACRF-3030-__-CLR-__	LT
			36.0"l x 30.0"h	ACRF-3630-__-CLR-__	LT
			48.0"l x 30.0"h	ACRF-4830-__-CLR-__	LT
			60.0"l x 30.0"h	ACRF-6030-__-CLR-__	LT
			72.0"l x 30.0"h	ACRF-7230-__-CLR-__	LT
	Frosted	Freestanding	24.0"l x 24.0"h	ACRF-2424-__-FST-__	LT
			30.0"l x 24.0"h	ACRF-3024-__-FST-__	LT
			36.0"l x 24.0"h	ACRF-3624-__-FST-__	LT
			48.0"l x 24.0"h	ACRF-4824-__-FST-__	LT
			60.0"l x 24.0"h	ACRF-6024-__-FST-__	LT
			72.0"l x 24.0"h	ACRF-7224-__-FST-__	LT
			24.0"l x 30.0"h	ACRF-2430-__-FST-__	LT
			30.0"l x 30.0"h	ACRF-3030-__-FST-__	LT
			36.0"l x 30.0"h	ACRF-3630-__-FST-__	LT
			48.0"l x 30.0"h	ACRF-4830-__-FST-__	LT
			60.0"l x 30.0"h	ACRF-6030-__-FST-__	LT
			72.0"l x 30.0"h	ACRF-7230-__-FST-__	LT

LT = Longer Lead Time. Please contact our Customer Service Department for current lead time when placing orders for products marked with LT.

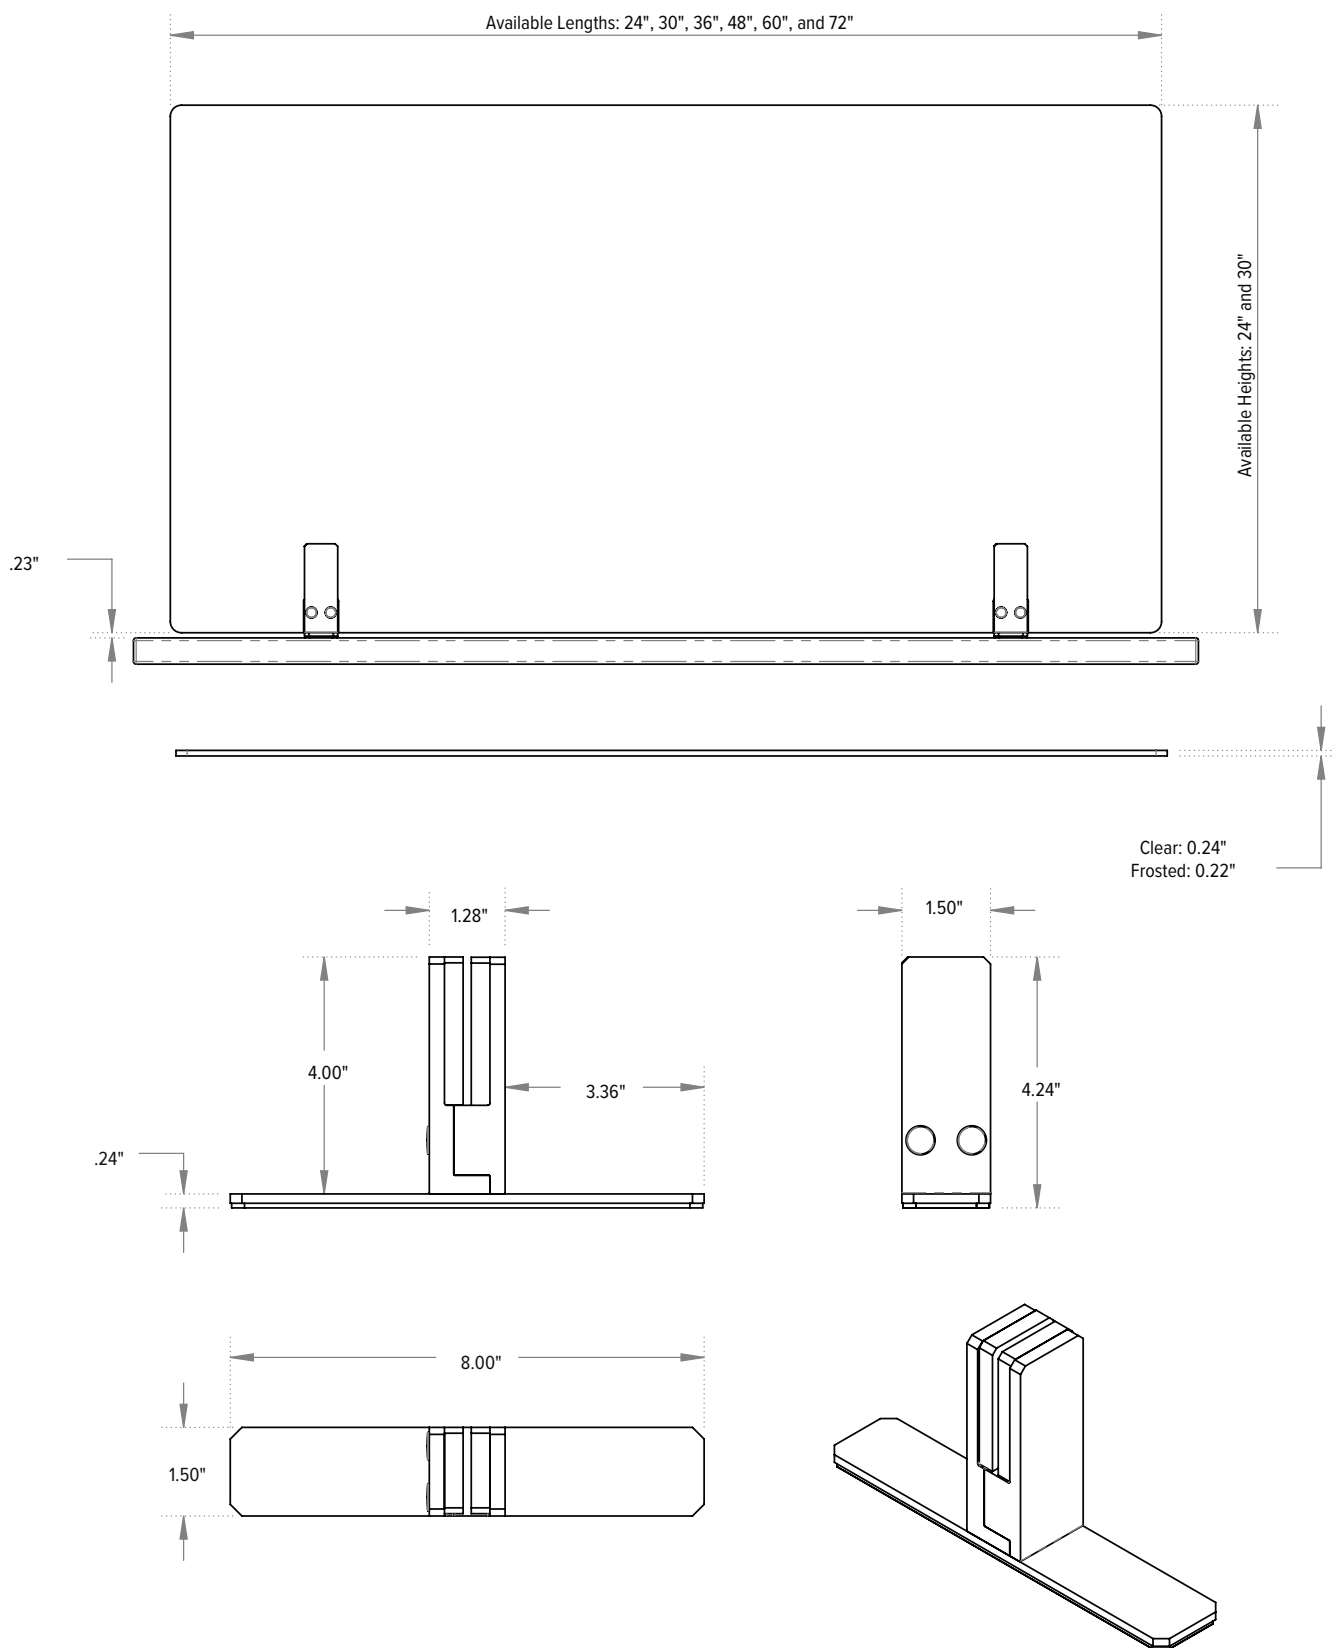

Cleaning Instructions for Acrylic Screen

First time setup: Do not attempt to clean immediately after removing the protective paper because the static electricity will attract dust and particles. Wait a day for the static to dissipate before cleaning.

Step 1

Begin by removing excess dust or dirt from the surface of the acrylic with an air hose or blow dryer set to its coolest setting (never heat acrylic). Hold the blow dryer at a 45-degree angle several inches away from the acrylic and run side-to-side down the surface. Wipe any remaining dust with a soft, lint-free cotton microfiber cloth.

Step 2

Once excess grime has been blown away, spray a nonabrasive acrylic cleaner, such as Brilliantize or Novus No. 1 onto a one- or two-foot-square section of acrylic. (For an on-hand alternative, a solution of mild dish soap and water works well too.) Never use abrasive cleaners or anything containing Ammonia such as Formula 409[®], Windex[®] or Fantastik[®]. Ammonia will cause your acrylic to get cloudy and you can't reverse the effects. Bleach solutions and disinfectants are not recommended and can cause damage to the acrylic.

Once the cleaner has been applied, use a soft, lint-free cotton microfiber cloth to gently wipe the surface down, again being careful to make contact only with the portion of the surface that already has cleaner on it. Continue applying the cleaner and wiping it off in small sections until you've finished the entire surface. Do not use a paper towel to clean acrylic because it can cause scratching.