

AA780DAT

ARTICULATING KEYBOARD ARM

Model AA780DAT

AA780DAT Rev A 4/17

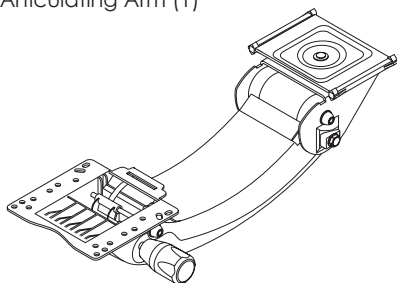
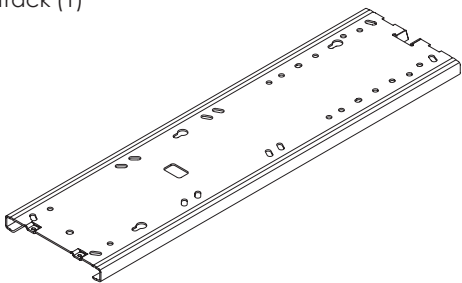
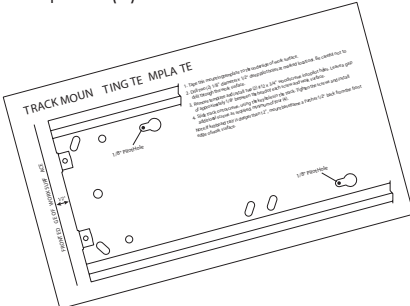





INSTALLATION AND USE

AA780DAT ARTICULATING KEYBOARD ARM

PLEASE REVIEW these instructions before beginning the installation. Check that all parts needed were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until satisfied that the product operates to your satisfaction.

PARTS PROVIDED

Articulating Arm (1) 	Track (1) 	
Template (1) 	Front Stop (1)  12x3/4" Screws (8) 	10x3/8" Screws (2)  Note: This install requires a power tool or cordless drill. This is not a hand tool install.

ADDITIONAL TOOLS REQUIRED

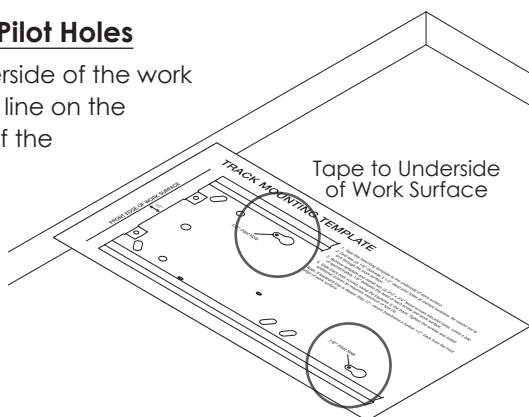
- Drill with 1/8" bit
- #2 Phillips bit
- #3 Phillips bit

STEP 1: Use Template to Drill Pilot Holes

- Tape the template to the underside of the work surface. Align the "front edge" line on the template with the front edge of the work surface.
- Drill 1/8" pilot holes through the two marked locations on the template.


— Drill the holes 5/8" deep

CAUTION: Be careful not to drill through the work surface.




STEP 2: Attach Track

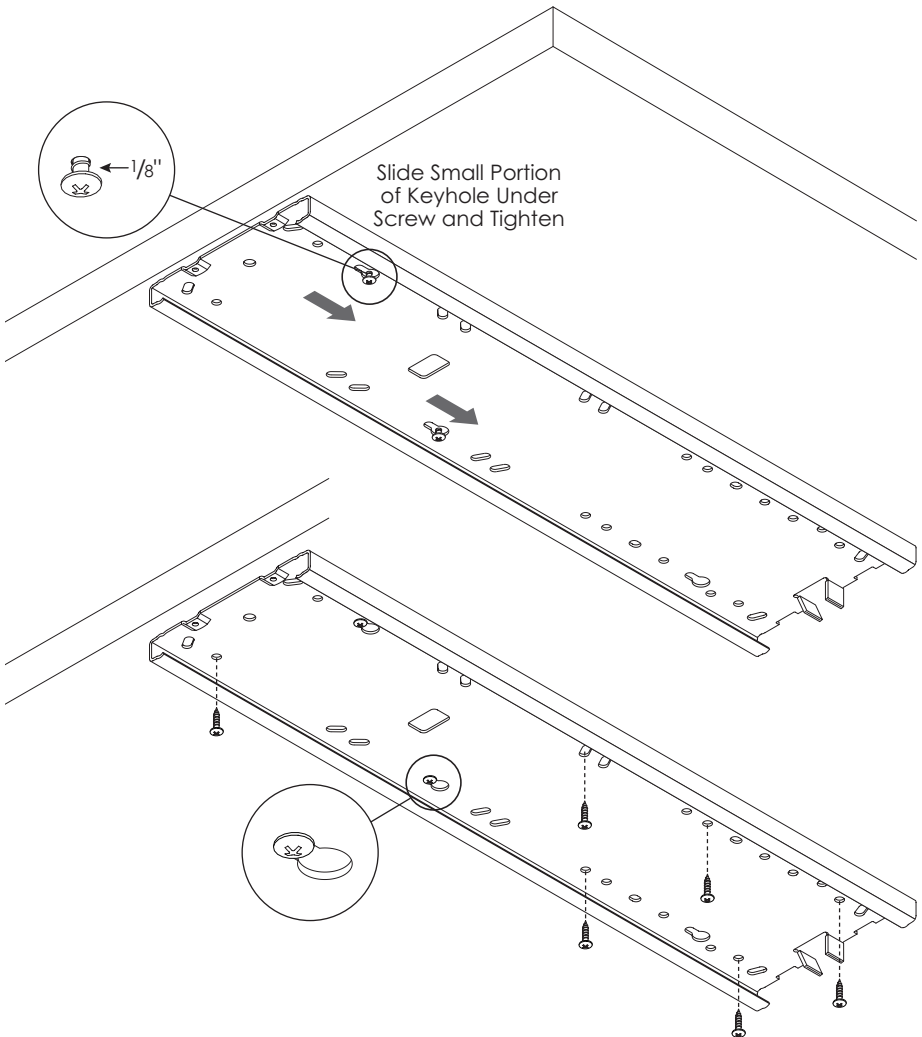- Remove the template and install two $\frac{3}{4}$ " wood screws into the pilot holes.
 - Leave a gap of approximately $\frac{1}{8}$ " between the head of each screw and the work surface
- Slide the track onto the screws, using the keyholes in the track. Tighten the screws.
- Drill pilot holes for six additional screws spaced evenly along the track. Fasten the screws to complete the installation of the track.




STEP 3: Install Articulating Arm

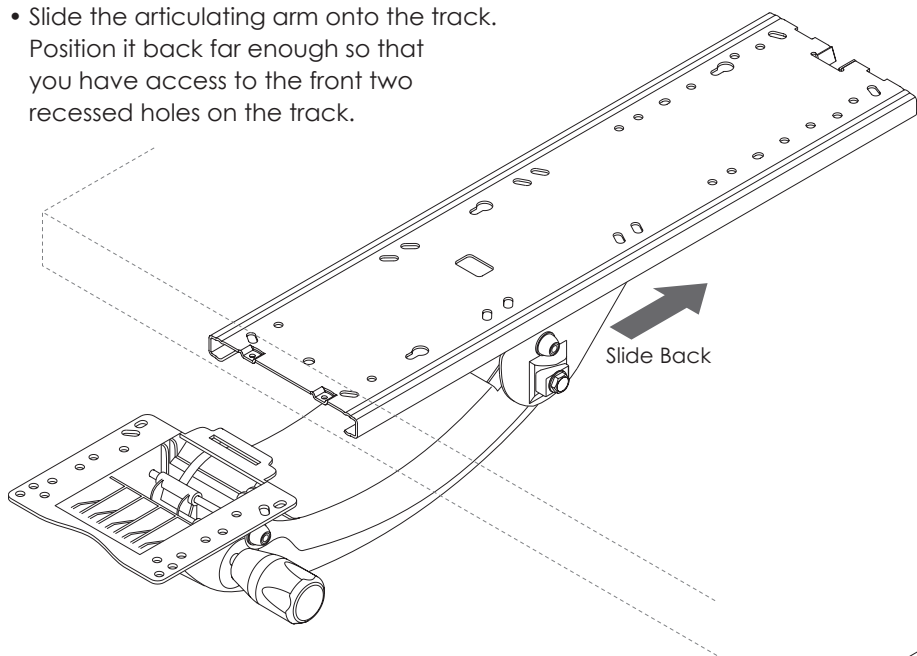- Slide the articulating arm onto the track. Position it back far enough so that you have access to the front two recessed holes on the track.



STEP 4: Attach Front Stop

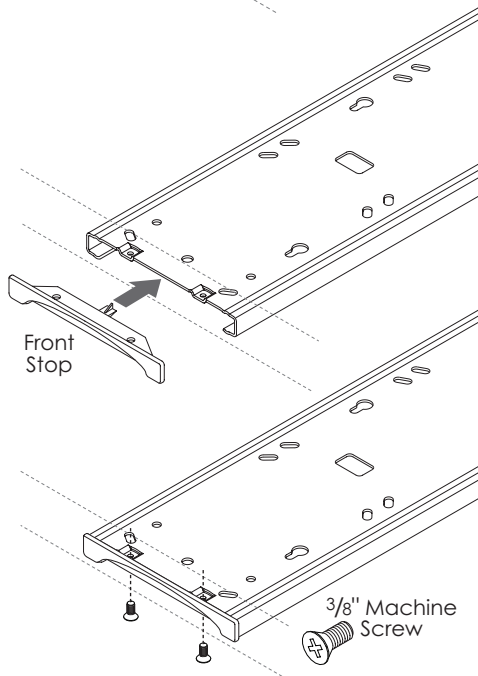- Position the front stop onto the front of the track and secure it with the $\frac{3}{8}$ " machine screws.



OPERATION

To Raise:

- Grasp both sides of the platform and raise to the desired height.

To Lower:

- Grasp both sides of the platform, tilt up the front, and move down to the desired height.

To Tilt:

- Turn the handle clockwise to tilt the platform up.
- Turn the handle counterclockwise to tilt the platform down.



800.833.3746 | esiergo.com