esi | work gear



Core

electric table base



Product Specs

- Electric height adjustment
- 130 lbs. base lifting capacity
- 1.5"/sec adjustment speed
- 26.0" height adjustment range
 - 21.4"-47.4" (low/high) (excluding worksurface)
- Three stage adjustable legs
- Fixed width frame
- · One motor
- · Soft start
- · Anti-collision
- The perfect single-column table base for cluster grouping and 90° corners
- Warranty: 15 yrs. structural | 7 yrs. mechanical

Digital Keypad

- Digital programmable switch with three memory settings
- Keypad can slide under worksurface to store out of the way





800.833.3746 esiergo.com

R	е	C	ta	ar	ıg	ıle
L.	C	·	LC	31	19	li C

Dimensions	Base model	Surface model	
36"w x 24"d	CORE	2R3624	
42"w x 24"d	CORE	2R4224	
36"w x 30"d	CORE	2R3630	
42"w x 30"d	CORE	2R4230	

120 degree

Dimensions	Base model	Surface model	
36"w x 24"d	CORE	120-3624	
42"w x 24"d	CORE	120-4224	
36"w x 30"d	CORE	120-3630	
42"w x 30"d	CORE	120-4230	

Small equal corner

	Dimensions	Base model	Surface model
WL	48"w x 24"d	CORE	2EC484824
	42"w x 24"d	CORE	2EC424224

Table bases can be purchased independently or combined with a worksurface. Worksurfaces can only be purchased with a table base. See laminate guide worksurface for details. ESI worksurfaces are made to exact dimensions. If nominal sizing is needed, please specify when ordering.

Available base finishes

Silver -SLV

Black -BLK

(IT) White -WHT

LT=CALL FOR ON HAND AVAILABILITY

Worksurface shapes - LT

Multiple worksurface shapes are available. See chart to the left for full list. Worksurfaces can be come in a variety of laminates.

Edge Detail


Worksurfaces ship with a standard square profile edge and coordinating 3mm edge band. Additional edge detail profiles are available.





Core


electric table base

Core top support





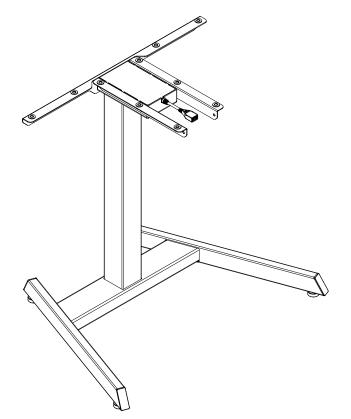

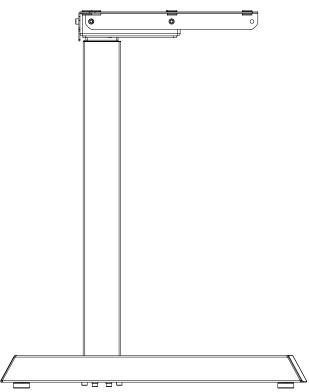

The base dimensions as shown are actual.

