



VICTORY-LX™ 2-LEG


ELECTRIC TABLE BASE



- Height Adjustment Range: 26.1"
 - Low: 21.6" | High: 47.7"
- Adjustment speed: 1.4"/sec
- Lifting capacity:
 - 220 lbs
- Adjustable cross channels
- Anti-collision safety feature
- ADA compliant
- Exceeds BIFMA x5.5 requirements
- Meets BIFMA GI-2013 ergonomic standards when used with a 1" worksurface
- Warranties:
 - 15yr (*structural*)
 - 7yr (*mechanical*)
- Low standby power consumption
- Optional casters are available


DIGITAL KEYPAD INCLUDED WITH BASE

- Digital programmable switch with 3 memory settings
- Keypad can slide under worksurface to store out of the way




2VT-LX-C36-24

ADJUSTABLE WIDTH

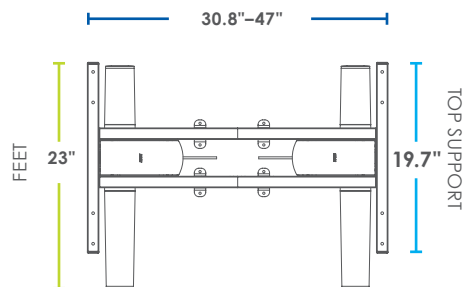


2VT-LX-C36-30

ADJUSTABLE WIDTH

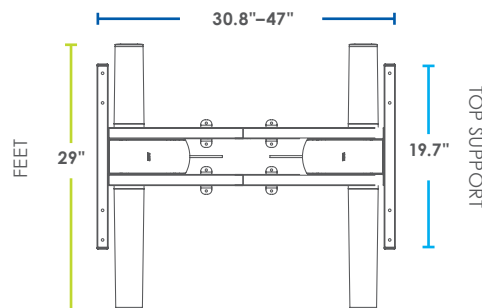


2VT-LX-C48-24

ADJUSTABLE WIDTH

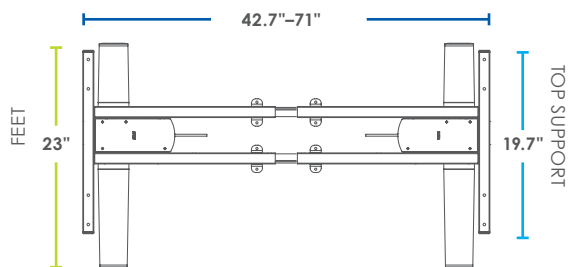


2VT-LX-C48-30


ADJUSTABLE WIDTH

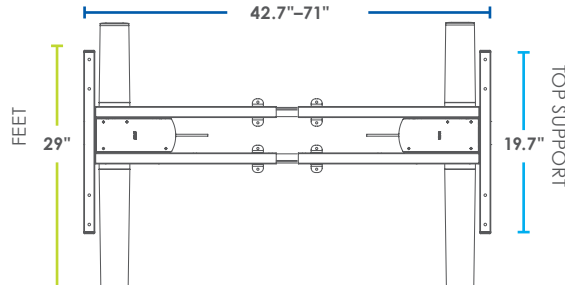

AVAILABLE WORKSURFACES



Rectangle



D-Top



Small Equal
Corner

BASE FINISH OPTIONS

Complete the base model # with the 3 letter finish code

-SLV



RAL: 7045

-BLK



RAL: 9004

-WHT




RAL: 9003

LT = CALL FOR ON-HAND AVAILABILITY

EDGE DETAIL

Worksurfaces ship with standard square profile edge and coordinating 3mm edge band.



Square Profile

Victory-LX™ 2-Leg Ordering Options NON GSA

	DIMENSIONS			BASE MODEL # SPECIFY FINISH	SURFACE MODEL # SPECIFY LAMINATE
	WL	WR	D		
RECTANGLE	36	24		2VT-LX-C36-24-__	2R3624__
	42	24		2VT-LX-C36-24-__	2R4224__
	48	24		2VT-LX-C48-24-__	2R4824__
	60	24		2VT-LX-C48-24-__	2R6024__
	72	24		2VT-LX-C48-24-__	2R7224__
	84	24		2VT-LX-C48-24-__	2R8424__
	36	30		2VT-LX-C36-30-__	2R3630__
	42	30		2VT-LX-C36-30-__	2R4230__
	48	30		2VT-LX-C48-30-__	2R4830__
	60	30		2VT-LX-C48-30-__	2R6030__
	72	30		2VT-LX-C48-30-__	2R7230__
	84	30		2VT-LX-C48-30-__	2R8430__
D-TOP	60	30		2VT-LX-C48-30-__	D6030__
	72	30		2VT-LX-C48-30-__	D7230__
	84	30		2VT-LX-C48-30-__	D8430__
SEC	42	42	24	2VT-LX-C36-24-__	2EC424224__
	48	48	24	2VT-LX-C36-24-__	2EC484824__

Casters

MODEL #

CASTERKIT-LX-2LEG

