


VESA HEAVY

WEIGHTED MOUNT

Model VESA-HVY-SLV

VESA-HVY Rev A 2/17

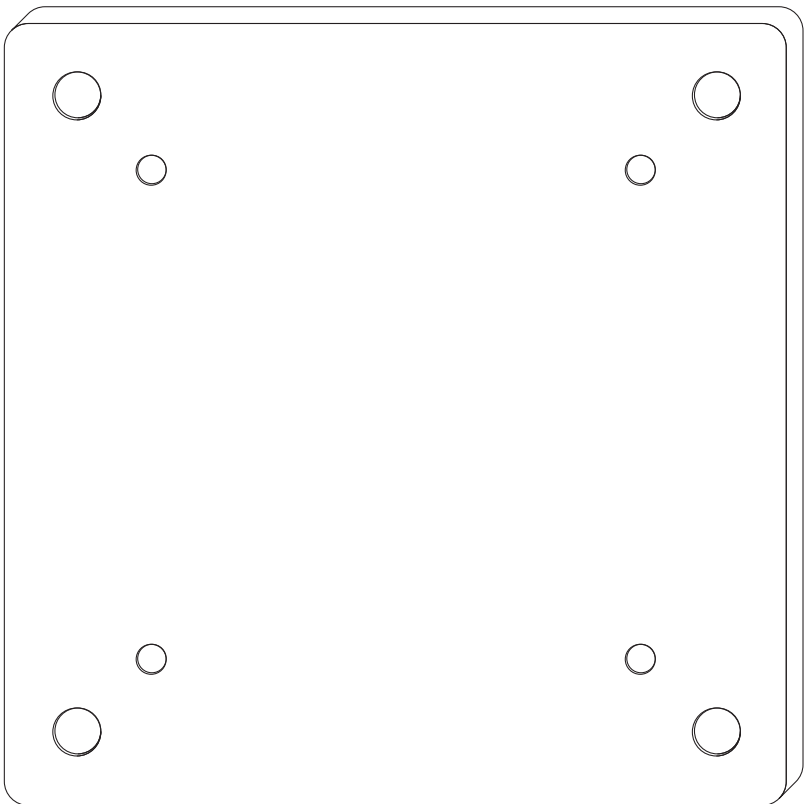




INSTALLATION

VESA HEAVY WEIGHTED MOUNT

PLEASE REVIEW these instructions before beginning the installation. Check that the parts shown below were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until satisfied that the product operates to your satisfaction.

The VESA Heavy weighted mount adds 2.4 lbs (1.1 kg) to the weight of a monitor. It is designed for use when monitor weight does not meet the minimum weight requirement for a monitor arm.

PARTS PROVIDED

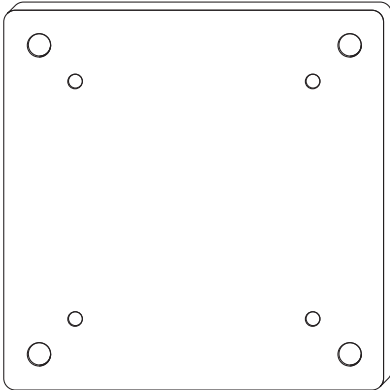VESA Heavy Mounting Plate (1) 	VESA Heavy Screw (4)  M4x20
	VESA Heavy Washer (4)  M10x20


CAUTION: Hand-tighten screws only. Do **not** use power tools.

TOOLS REQUIRED

- Phillips screwdriver

Position VESA Heavy Mounting Plate on Monitor


- Place the monitor face down on a soft, flat surface. Align the slotted holes on the VESA Heavy mounting plate with the holes on the back of the monitor.

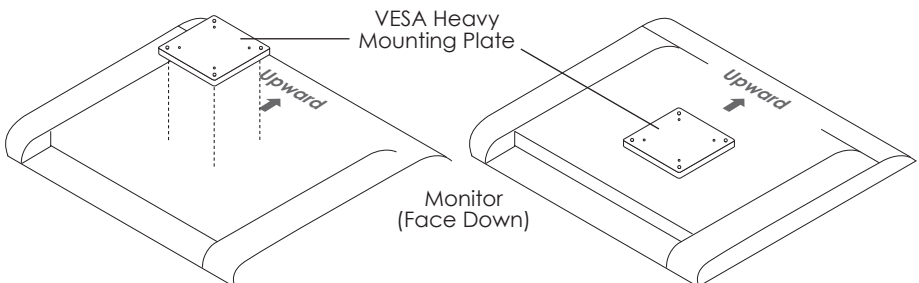

Attach Standard and Heavy VESA Plates to Monitor


- Align the VESA plate holes on the standard VESA plate with the holes on the back of the monitor. Attach both VESA plates using the four M4x20 screws and washers provided.

- There are two sets of four holes on the standard VESA plate. One set has holes 3.9" (100mm) apart, the other set has holes 3" (75mm) apart. Use the set that matches the holes on the monitor.

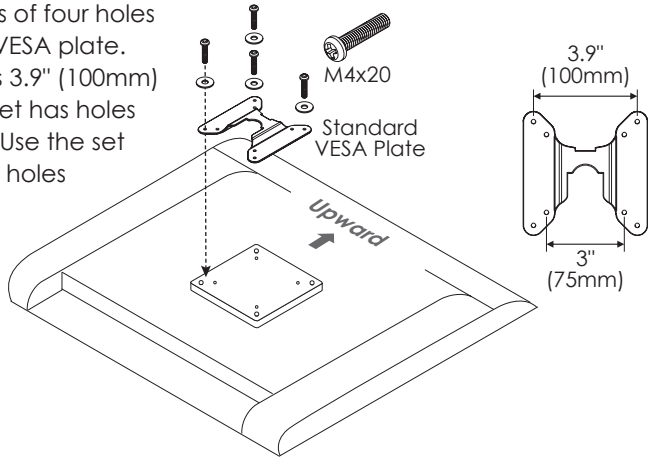

Attach Monitor to VESA Mount

- Slide the standard VESA plate onto the VESA mount. Make sure the VESA plate clicks securely in place.
- **Optional:** Install a VESA locking screw behind the VESA plate to prevent the tab on the VESA plate from releasing the monitor.

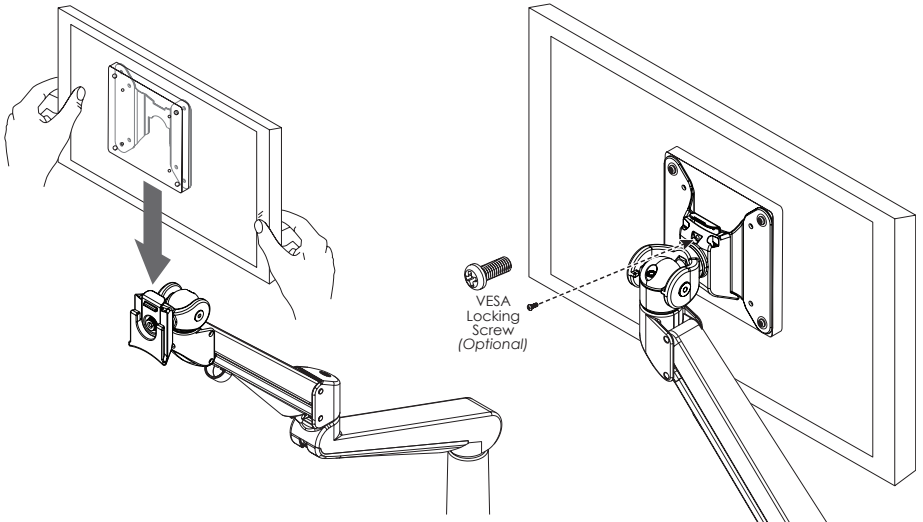



800.833.3746 | esiergo.com