


PL006

KEYBOARD PLATFORM

Model PL006-27

PL006 Rev A 10/17









INSTALLATION AND USE

PL006 KEYBOARD PLATFORM

PLEASE REVIEW these instructions before beginning the installation. Check that all parts needed were provided with your order. Contact your supplier if any parts are missing. Do not discard the packaging until content that the product operates to your satisfaction.

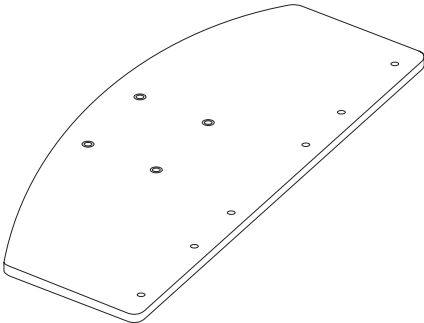PARTS PROVIDED

Keyboard Platform (1)		Palm Rest (1 or 2)	
		 <i>1 Each for Keying and Mousing</i>	
Flathead Screw (4)	Flange Nut (4)	Panhead Screw (4)	Cord Clips (2)
 #8-32x1/2	 #8x32	 #8-32x5/8	

CAUTION: Hand-tighten screws only. Do **not** use power tools.


TOOLS REQUIRED

- Phillips screwdriver

STEP 1: Attach Palm Rest(s)

- Attach the palm rest(s) to the keyboard platform. Use the #8-32x5/8 panhead screws and a Phillips screwdriver. Six screw holes are located in the keyboard platform to accommodate a variety of installation possibilities.

- With separate palm rests for mouse and keyboard, attach the palm rests with two screws each.
- The mouse and keyboard palm rests may be attached on either the left or right sides of the keyboard platform.

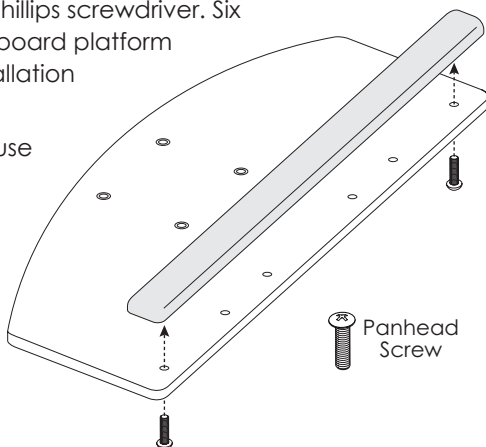


STEP 2: Attach Keyboard Platform

- Attach the keyboard platform to the keyboard arm and track assembly using the four flathead screws and flange nuts.


— Be sure the flange on the nuts is facing upward.

IMPORTANT: The flange nuts must be fully tightened to ensure the nuts are locked. Use a Phillips screwdriver.

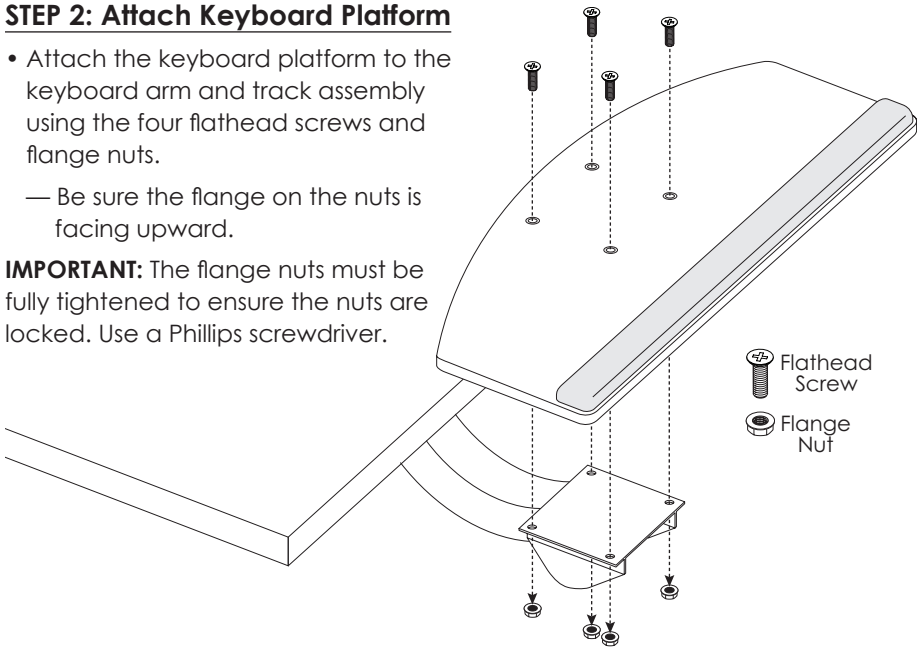

STEP 3: Manage Cables

- Adhere cord clips to the underside of the keyboard platform as needed to organize the keyboard and mouse cables.

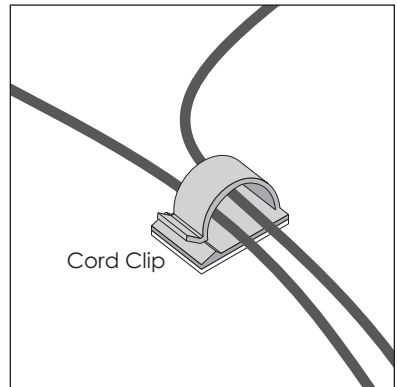

TO OPERATE THE KEYBOARD ARM, follow the instructions on the keyboard arm or the instructions included with the installation procedures for the product.



800.833.3746 | esiergo.com