



TRIUMPH-LX™



ELECTRIC TABLE BASE

- Height adjustment range: 17.3" - Low: 26.1" | High: 43.4"
- Adjustment speed: 1.4"/sec
- Base lifting capacity: 220 lbs
- Adjustable cross channels
- Anti-collision safety feature
- ADA compliant
- Two motors
- Exceeds BIFMA x5.5 requirements
- Warranties:
 - 15 year (*structural*)
 - 7 year (*mechanical*)
- Low standby power consumption
- Optional casters are available


DIGITAL KEYPAD INCLUDED WITH BASE

- Digital programmable switch with three memory settings
- Keypad can slide under worksurface to store out of the way




2T-LX-C28-24

ADJUSTABLE WIDTH

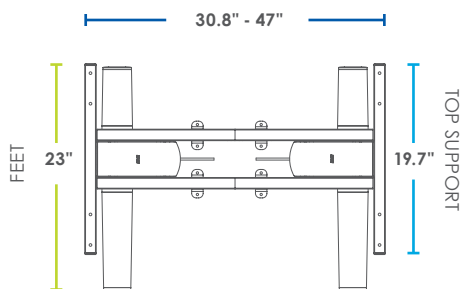


2T-LX-C28-30

ADJUSTABLE WIDTH

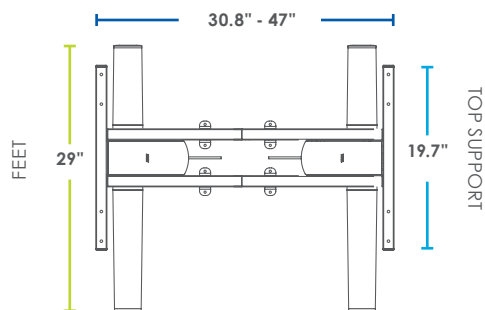


2T-LX-C40-24

ADJUSTABLE WIDTH

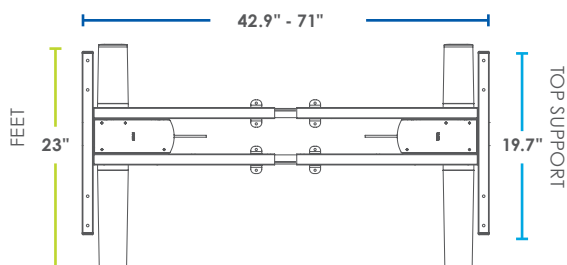

2T-LX-C40-30

ADJUSTABLE WIDTH

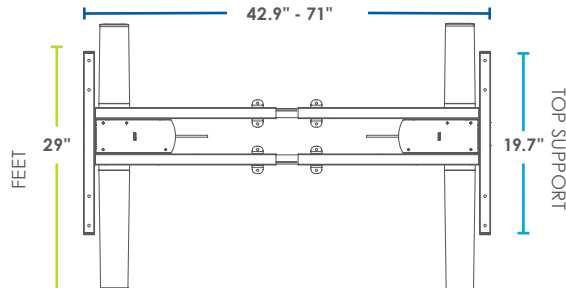

AVAILABLE WORKSURFACES



Rectangle



D-Top



(SEC)
Small Equal
Corner

BASE FINISH OPTIONS

Complete the base model # with the 3 letter finish code

-SLV



RAL: 7045

-BLK



RAL: 9004

-WHT




RAL: 9003

LT = CALL FOR ON-HAND AVAILABILITY

EDGE DETAIL

Worksurfaces ship with standard square profile edge and coordinating 3mm edge band.



Square Profile

Triumph-LX™ 2-Leg Ordering Options NON GSA

	DIMENSIONS			BASE MODEL # SPECIFY FINISH	V29 BASE LIST	SURFACE MODEL # SPECIFY LAMINATE	V29 SURFACE LIST
	WL	WR	D				
RECTANGLE		36	24	2T-LX-C28-24-__	\$872	2R3624__	\$368
		42	24	2T-LX-C28-24-__	\$872	2R4224__	\$403
		48	24	2T-LX-C28-24-__	\$872	2R4824__	\$407
		60	24	2T-LX-C40-24-__	\$872	2R6024__	\$452
		72	24	2T-LX-C40-24-__	\$872	2R7224__	\$496
		36	30	2T-LX-C28-30-__	\$872	2R3630__	\$398
		42	30	2T-LX-C28-30-__	\$872	2R4230__	\$442
		48	30	2T-LX-C28-30-__	\$872	2R4830__	\$447
		60	30	2T-LX-C40-30-__	\$872	2R6030__	\$496
D-TOP		72	30	2T-LX-C40-30-__	\$872	2R7230__	\$546
		60	30	2T-LX-C40-30-__	\$872	D6030__	\$768
SEC		72	30	2T-LX-C40-30-__	\$872	D7230__	\$837
	42	42	24	2T-LX-C28-24-__	\$872	2EC424224__	\$782
	48	48	24	2T-LX-C28-24-__	\$872	2EC484824__	\$796

Casters

MODEL #	V29 LIST
CASTERKIT-LX-2LEG	\$48

