


CLIMB PRE-ASSEMBLED

ERGORISE – SIT / STAND WORKSTATION



VERSION **C**
INSTRUCTION MANUAL

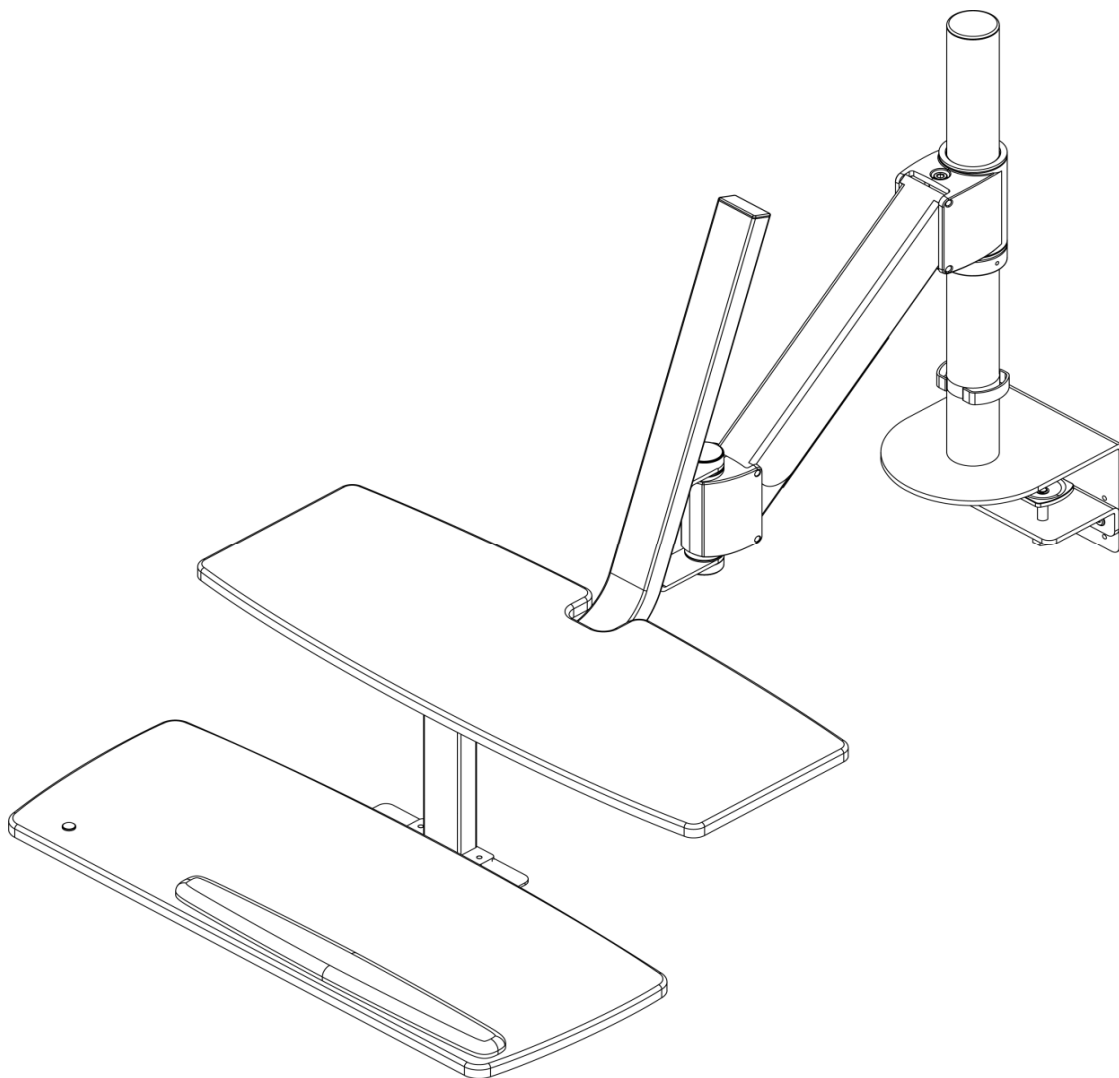

CLIMB1 (Single Monitor)

MAX Weight 20 lbs (9 KG)

CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!







CLIMB2 (Dual Monitor)

MAX Weight 16 lbs (7.26 KG)



CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!



PARTS LIST

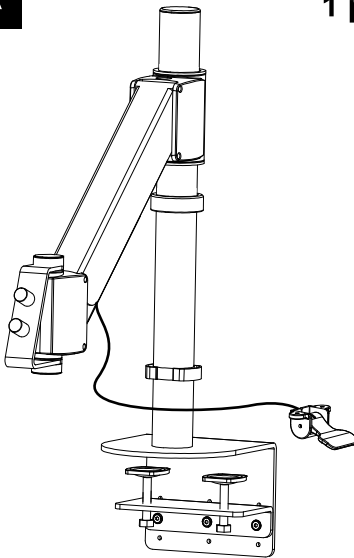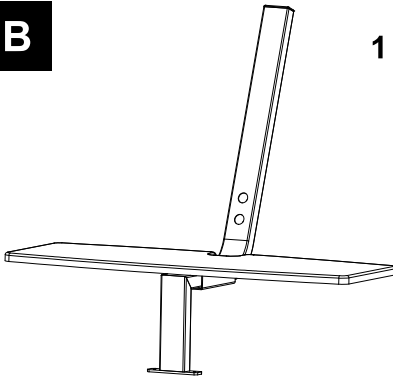A  1 pcs	B  1 pcs	D1  1 pcs	
		D2  1 pcs	
	C  1 pcs	E2  1 pcs	
H [M6 x 10 mm]  2 pcs	I [M6 x 25 mm]  4 pcs	J  2 pcs	K  2 pcs
L  2 pcs	M  1 pcs	O  2 pcs	
P Extra Replacement (1 pcs) Included  2 pcs	Q  1 pcs	R  1 pcs	
S  1 pcs	T  1 pcs		


Step 1 : Fasten Main Assembly [Part A] to Worksurface

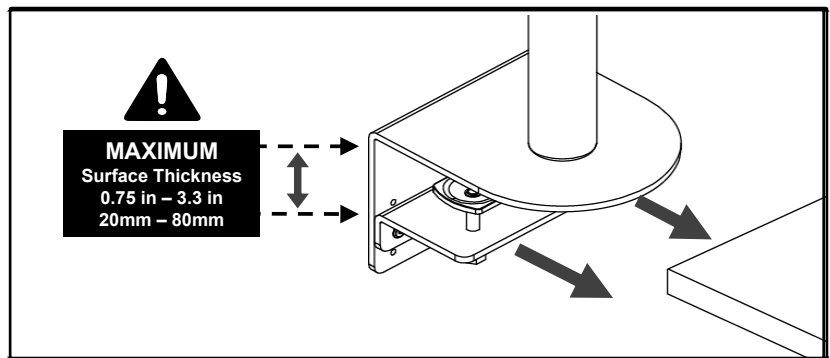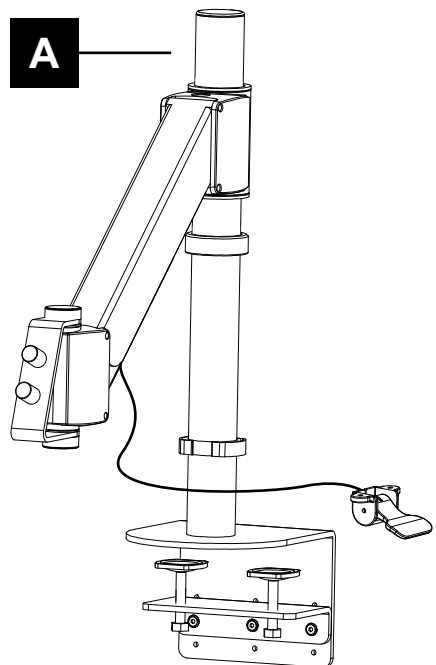




Adjust the Height of the Main Assembly Arm




Secure the Height
Adjust Lock Ring (E2)
to Preferred Height

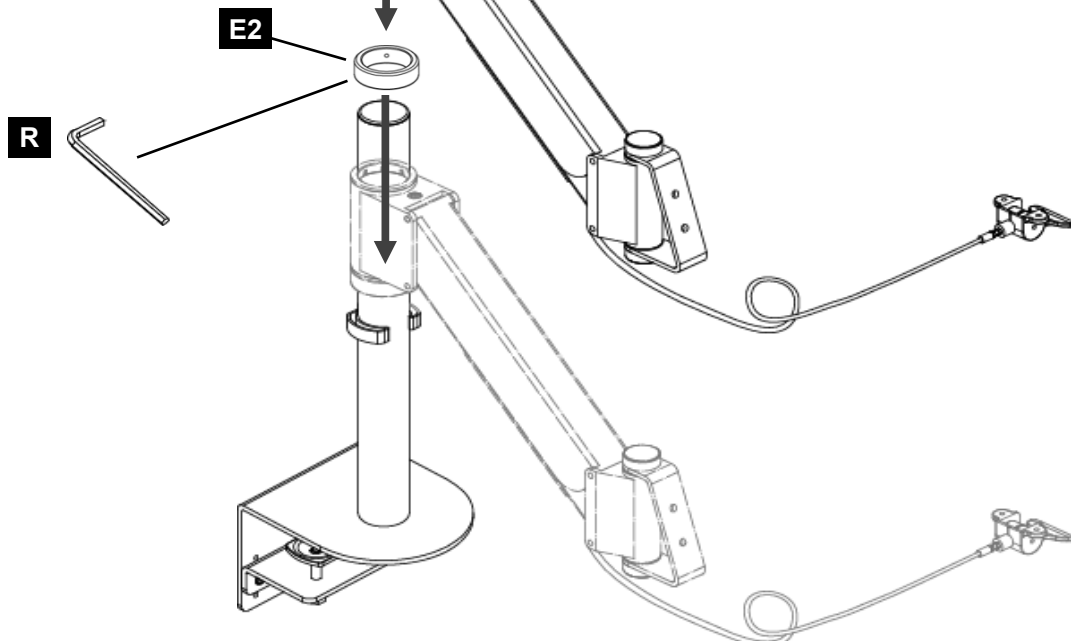


**Step 2 : Attach the writing platform [Part B]
to the Main assembly [Part A]**

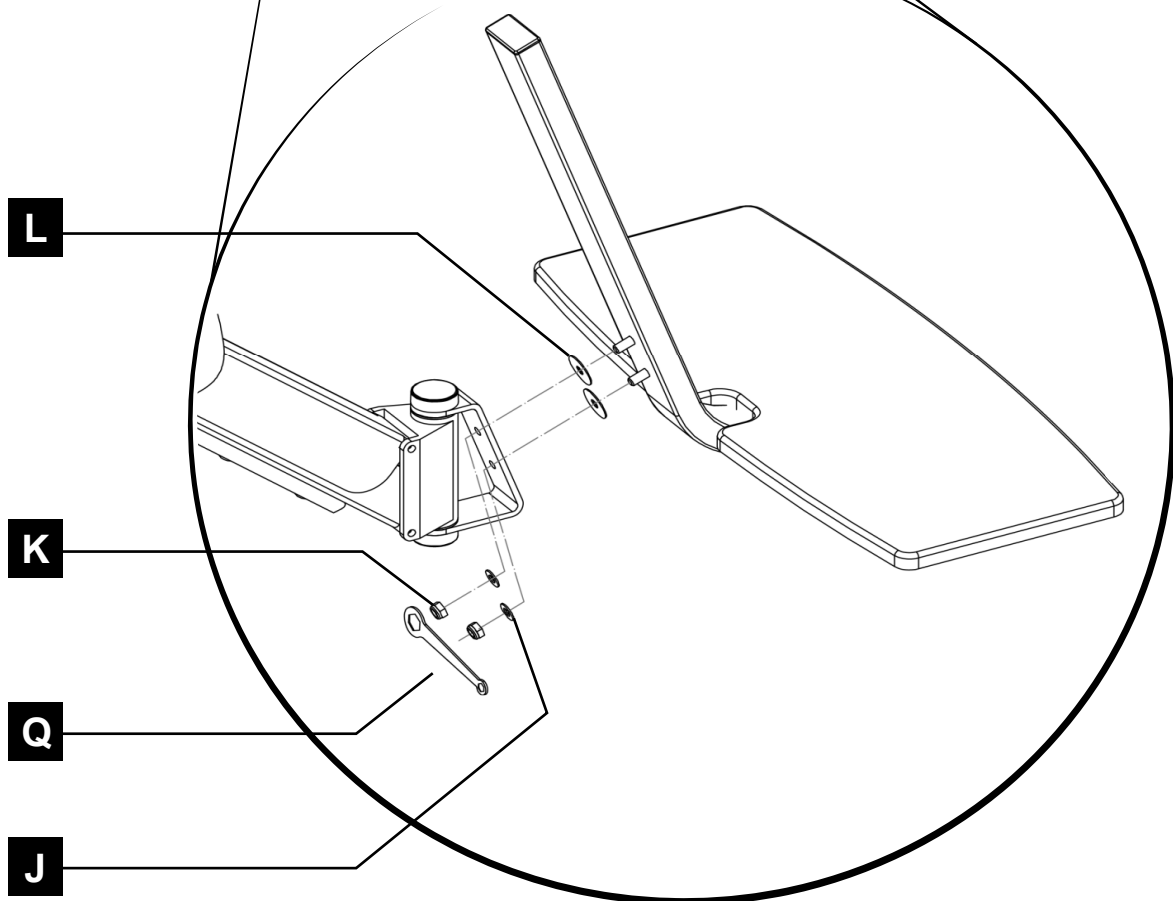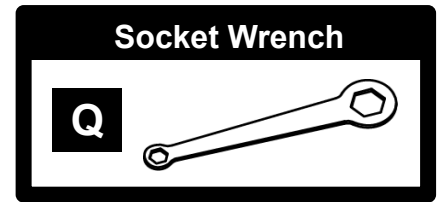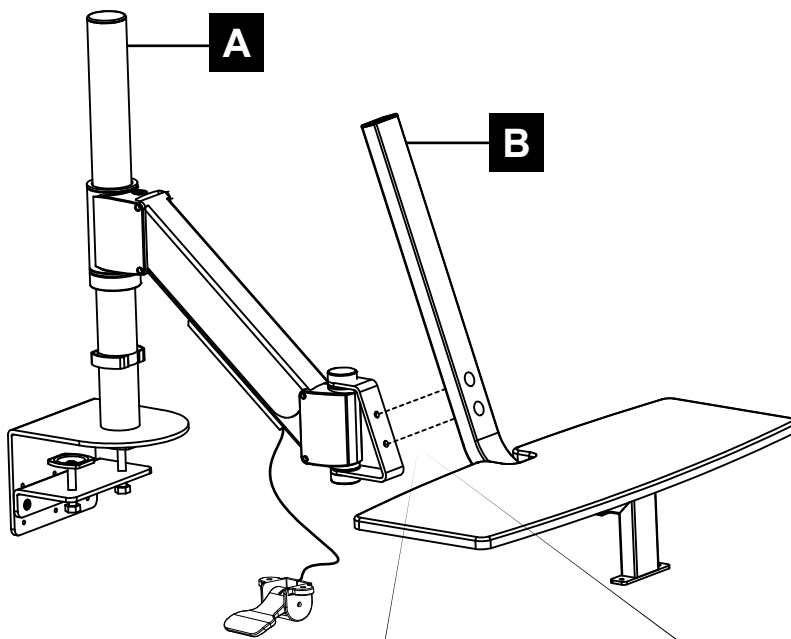

Step 3 : Attach the Paddle from the Main Assembly [Part A] to the Keyboard Platform [Part C]

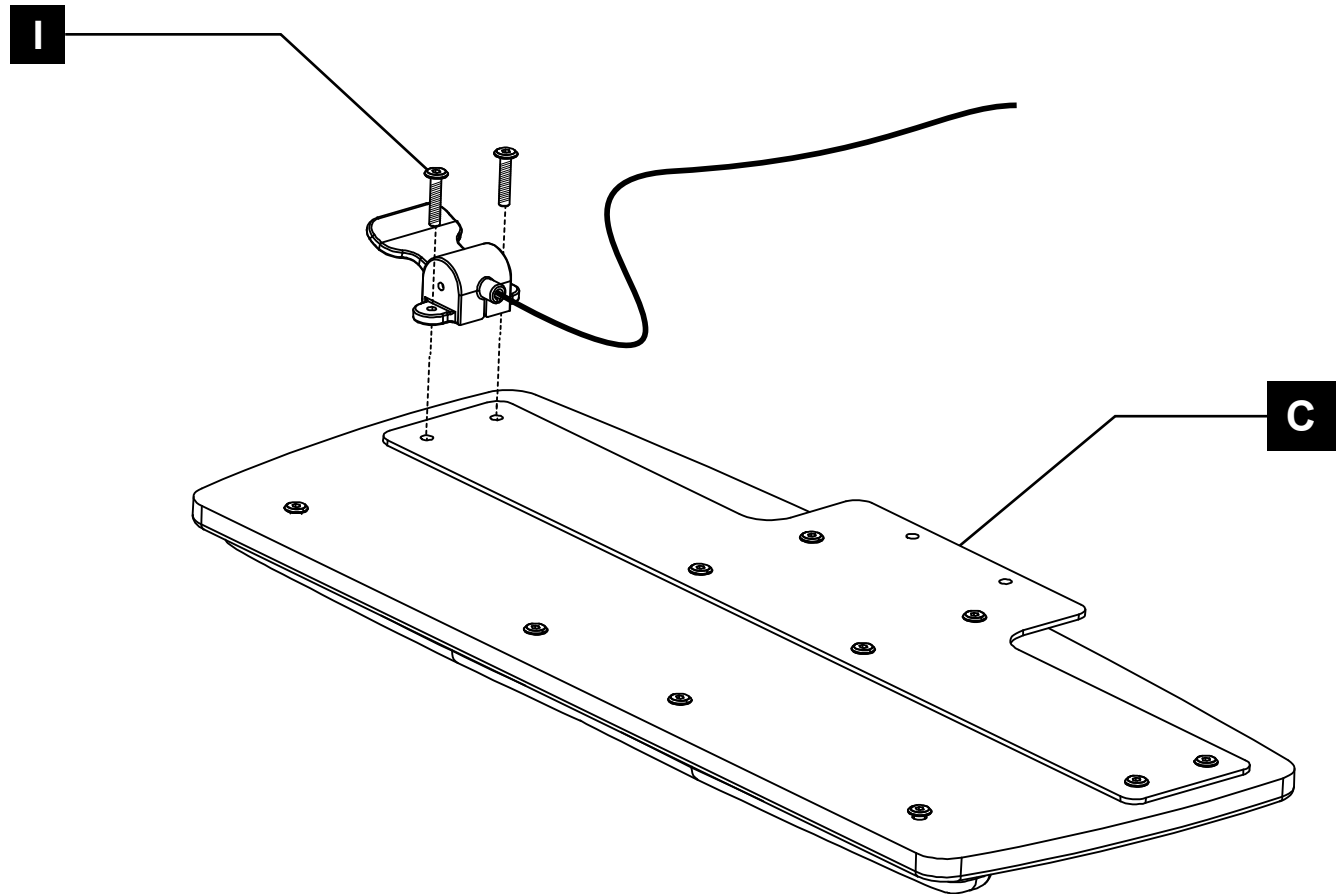


Left or right handed wristrest placement options

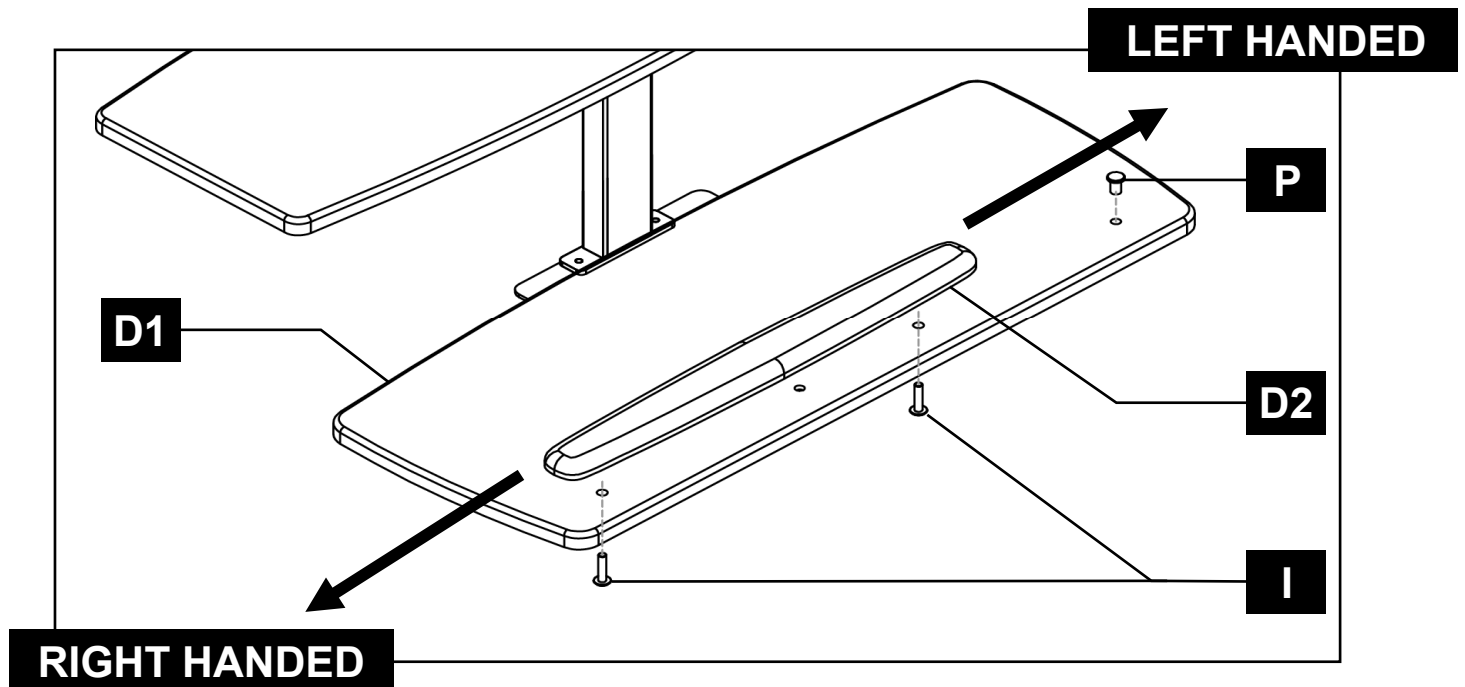


Step 4 : Attach the writing platform [Part B] to the Main assembly [Part A]

Allen Wrench


S

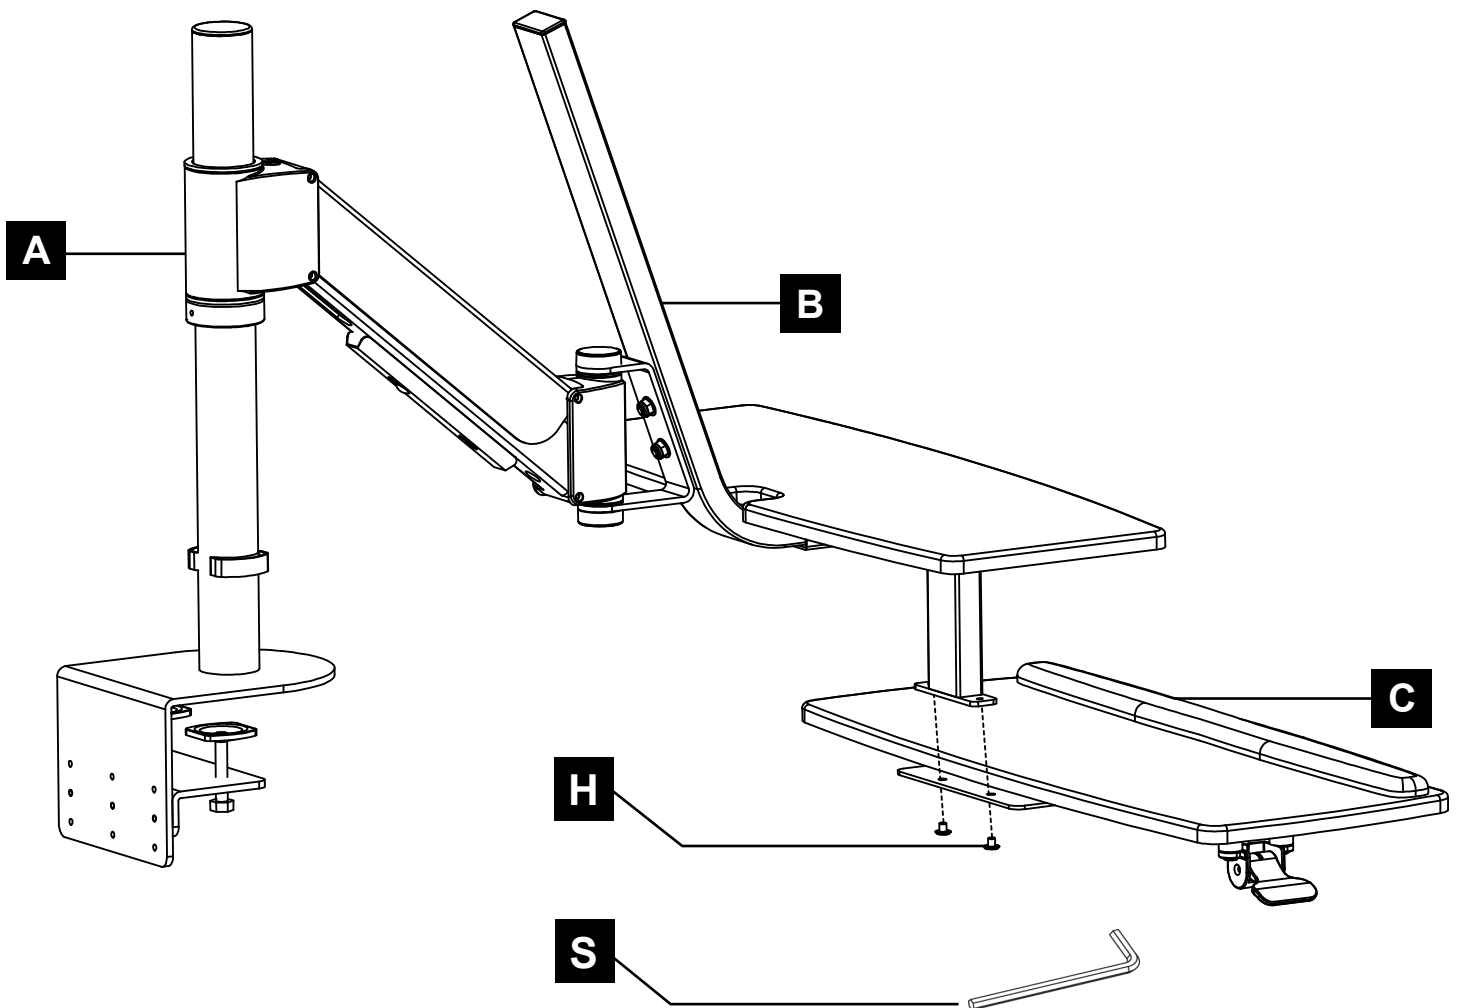

STEP 8

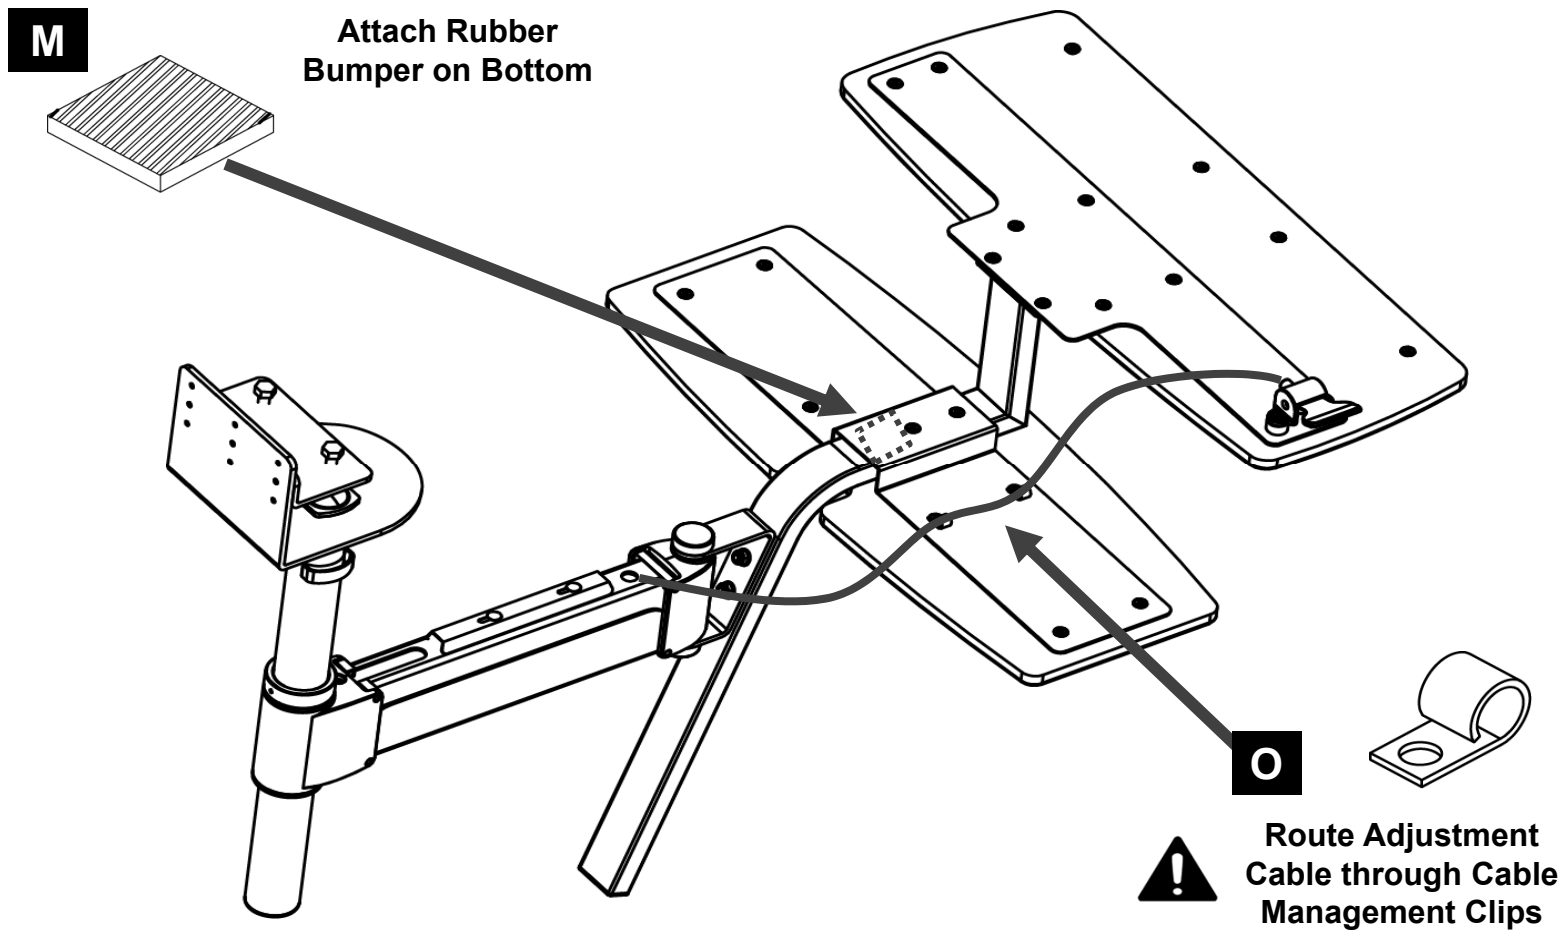

STEP 9

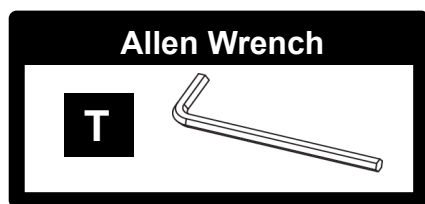

MIN
Load

MAX
Load


+

DO NOT
OVERTIGHTEN
MAX (+)
ADJUSTMENT


STEP 10 - TENSION LEVER



**Adjust TENSION
LEVER for Lift and
Response Rate**

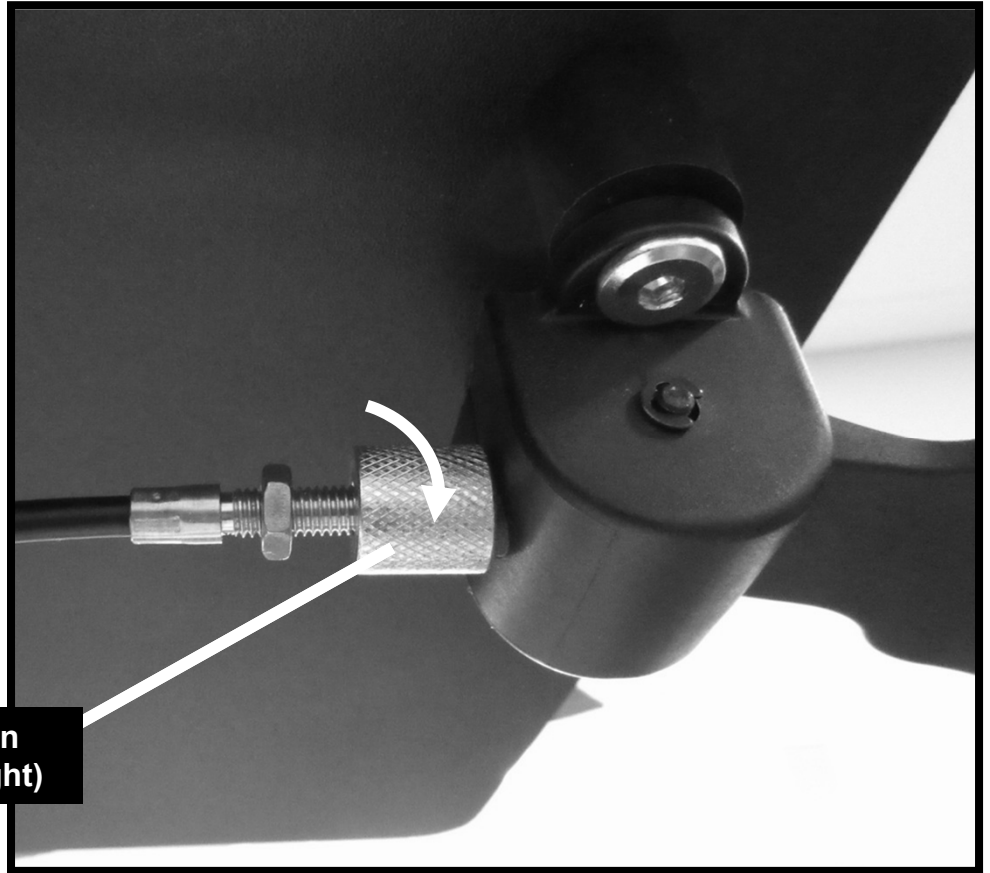


**Adjust Lever Tension
Screw Clockwise (Right)**

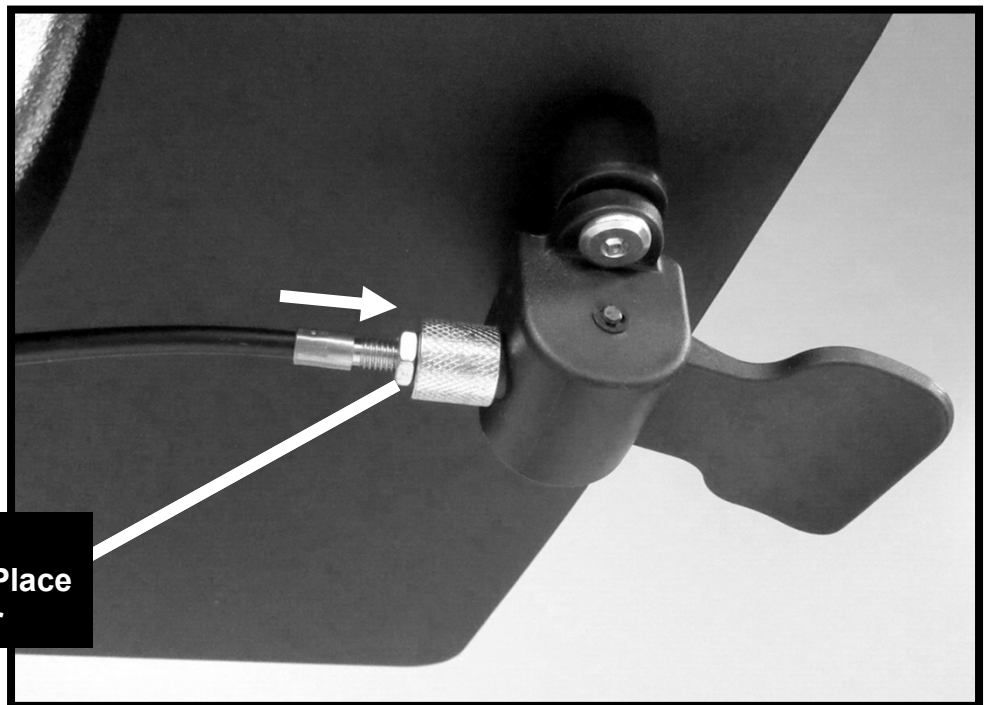


**Lock the Tension
Adjustment Screw in Place
with Lock Washer**

SINGLE / DUAL MONITOR ADAPTER INSTALLATION





OPTION A1 CLIMB-DP1 (Single)

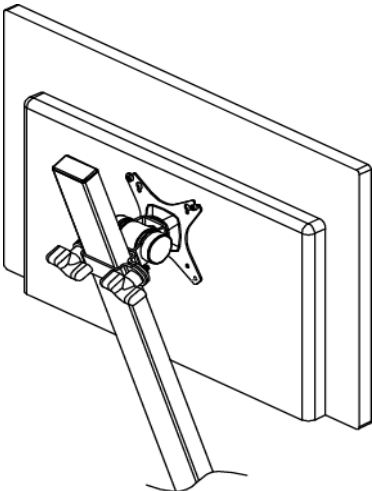

OPTION A2 CLIMB-DP2 (Dual)

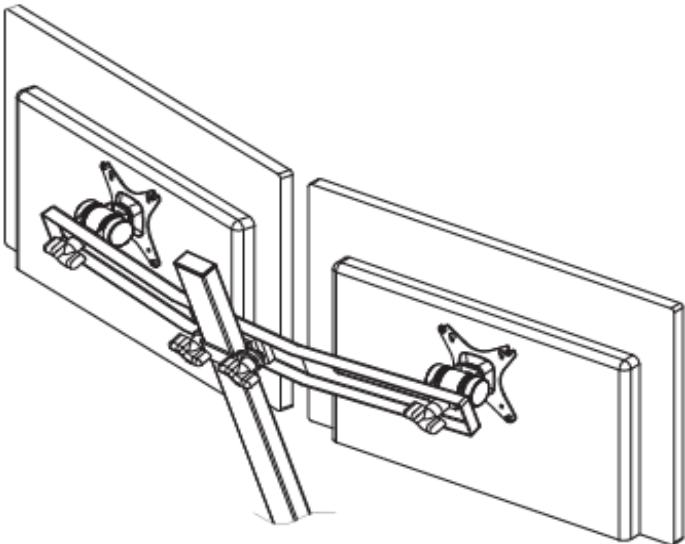


PARTS LIST

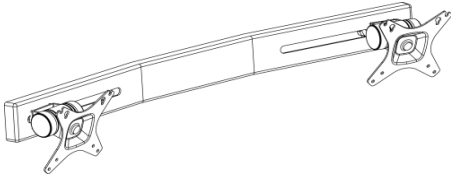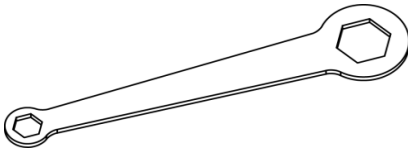A1	 1 pcs	A2	 1 pcs	B	 Single A1 = 4 pcs Double A2 = 8 pcs
C	 1 pcs	D	 2 pcs		

SINGLE ADAPTER INSTALLATION

OPTION A1
CLIMB-DP1 (Single)

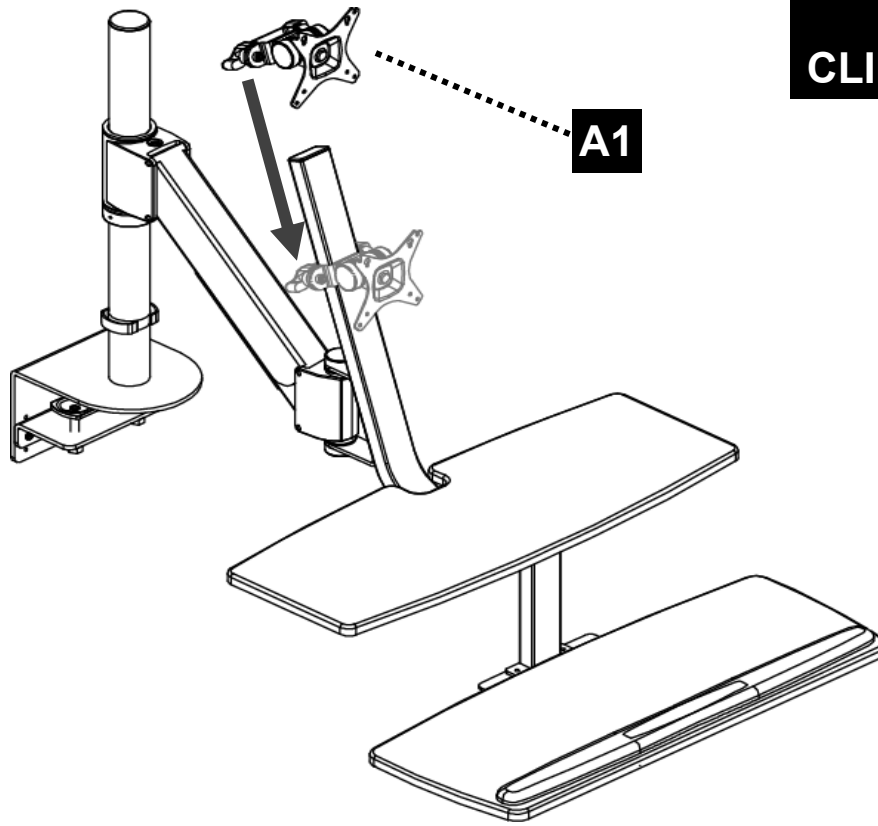

Remove Cap

+

+45 Degrees

D

-13 Degrees

Socket Wrench

D




D

Remove Cap


DUAL ADAPTER INSTALLATION

OPTION A2
CLIMB-DP2 (Dual)

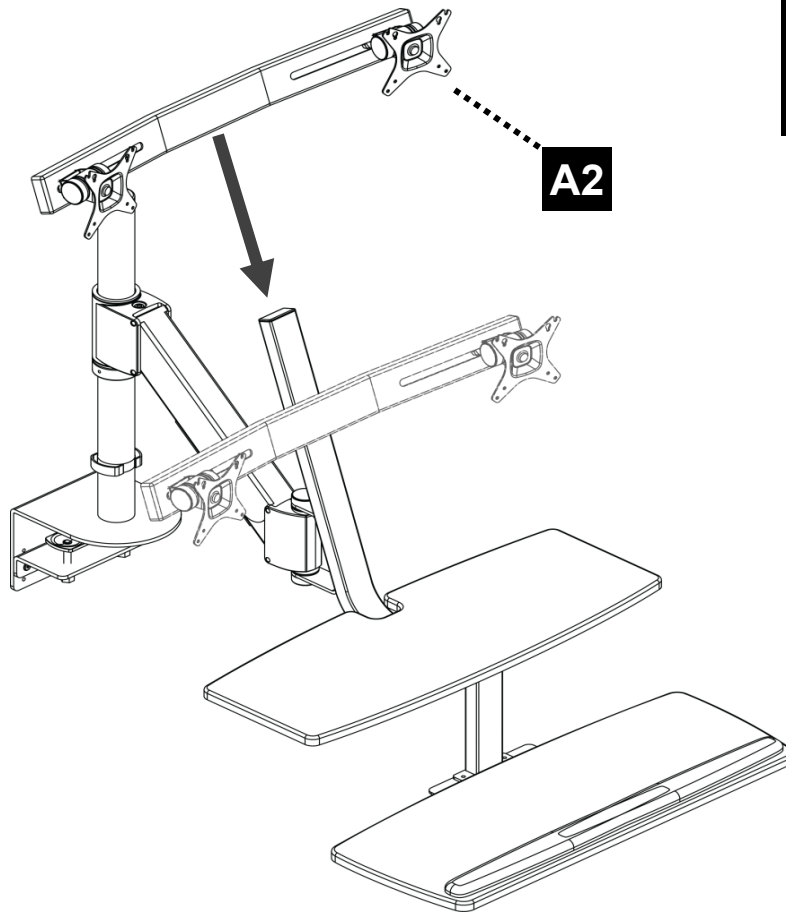

Remove
Cap

TILT
+60 / -60
Degree


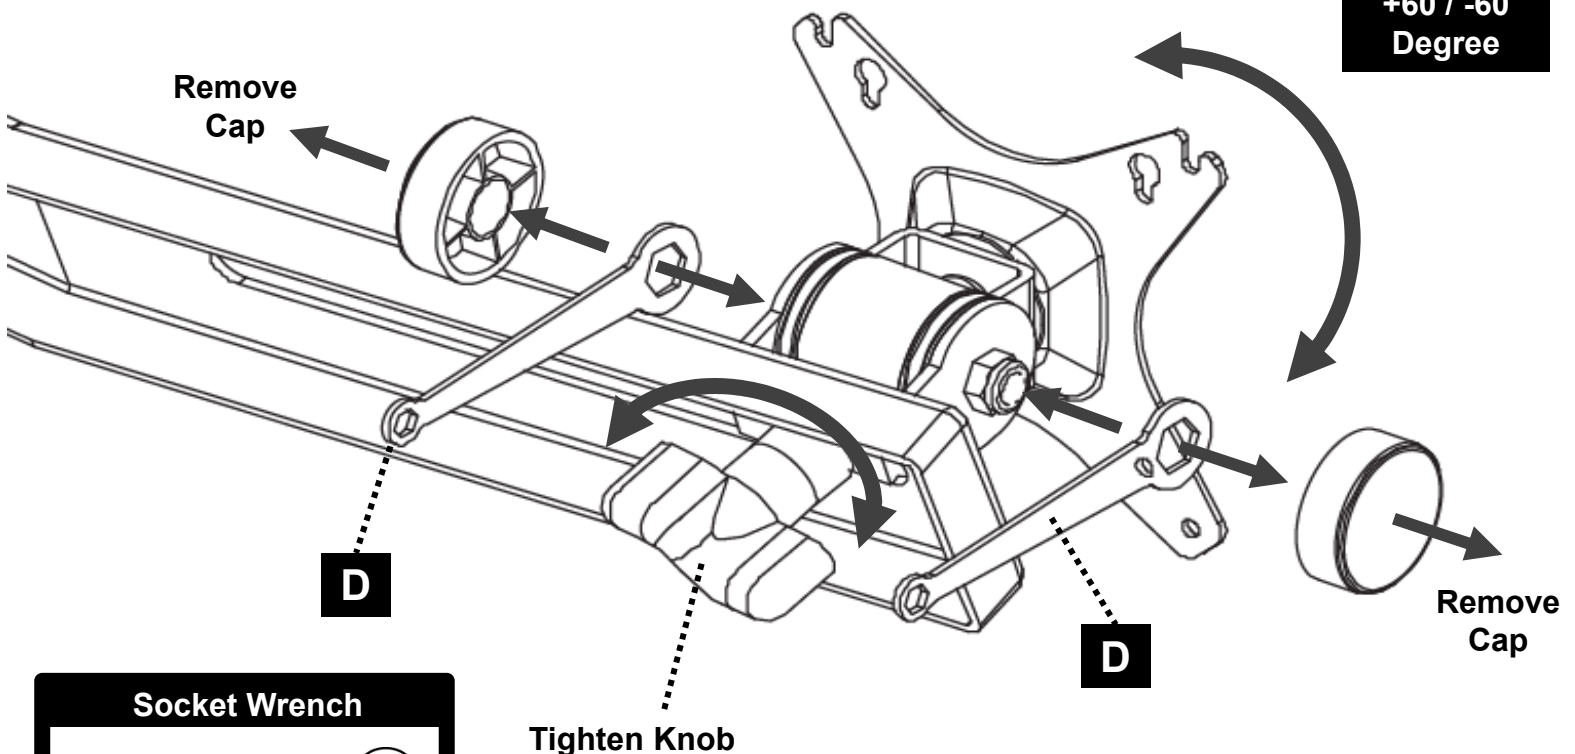



Socket Wrench

R



MONITOR INSTALL

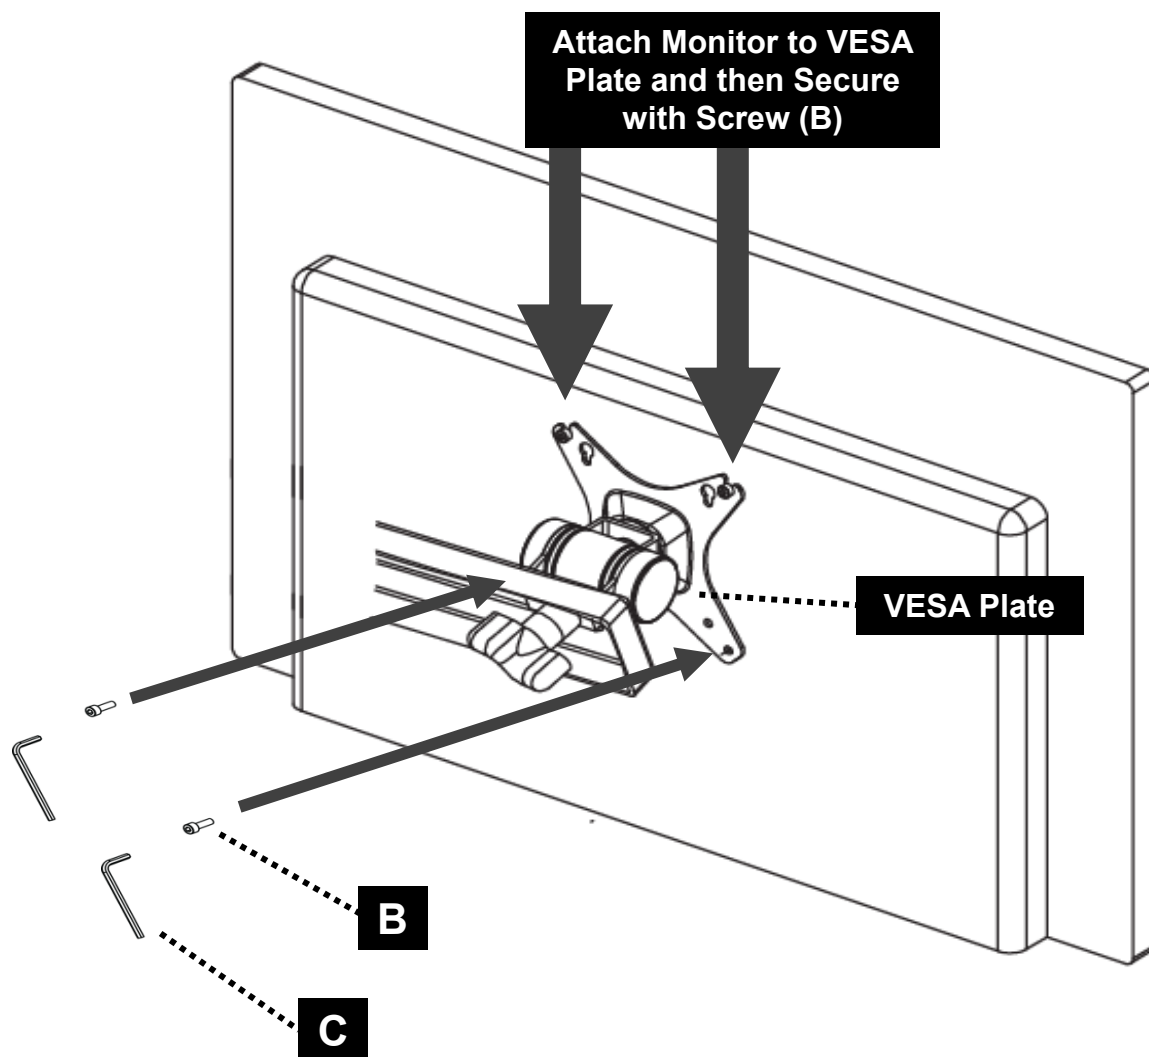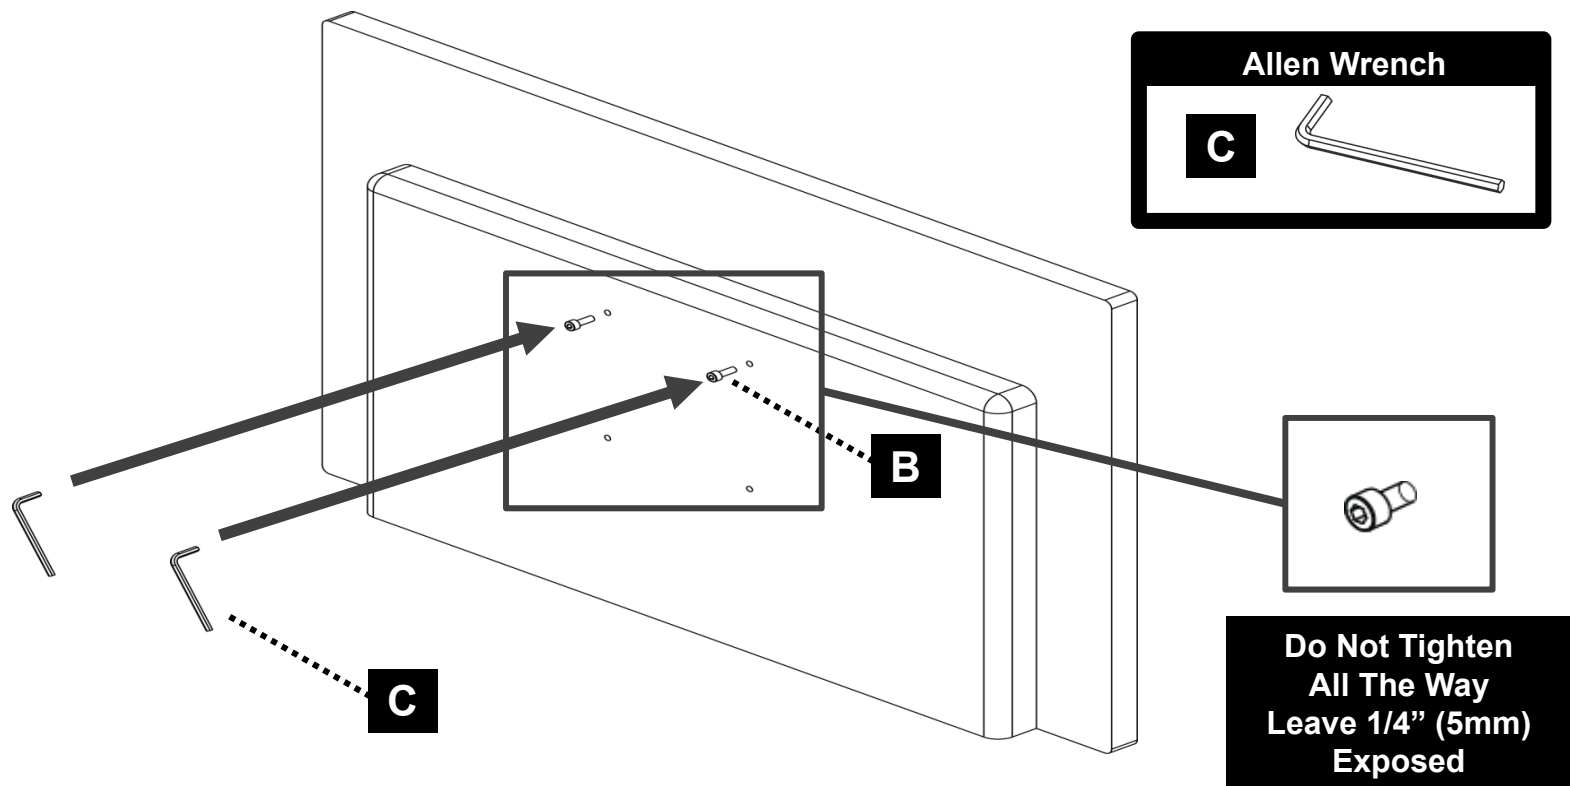

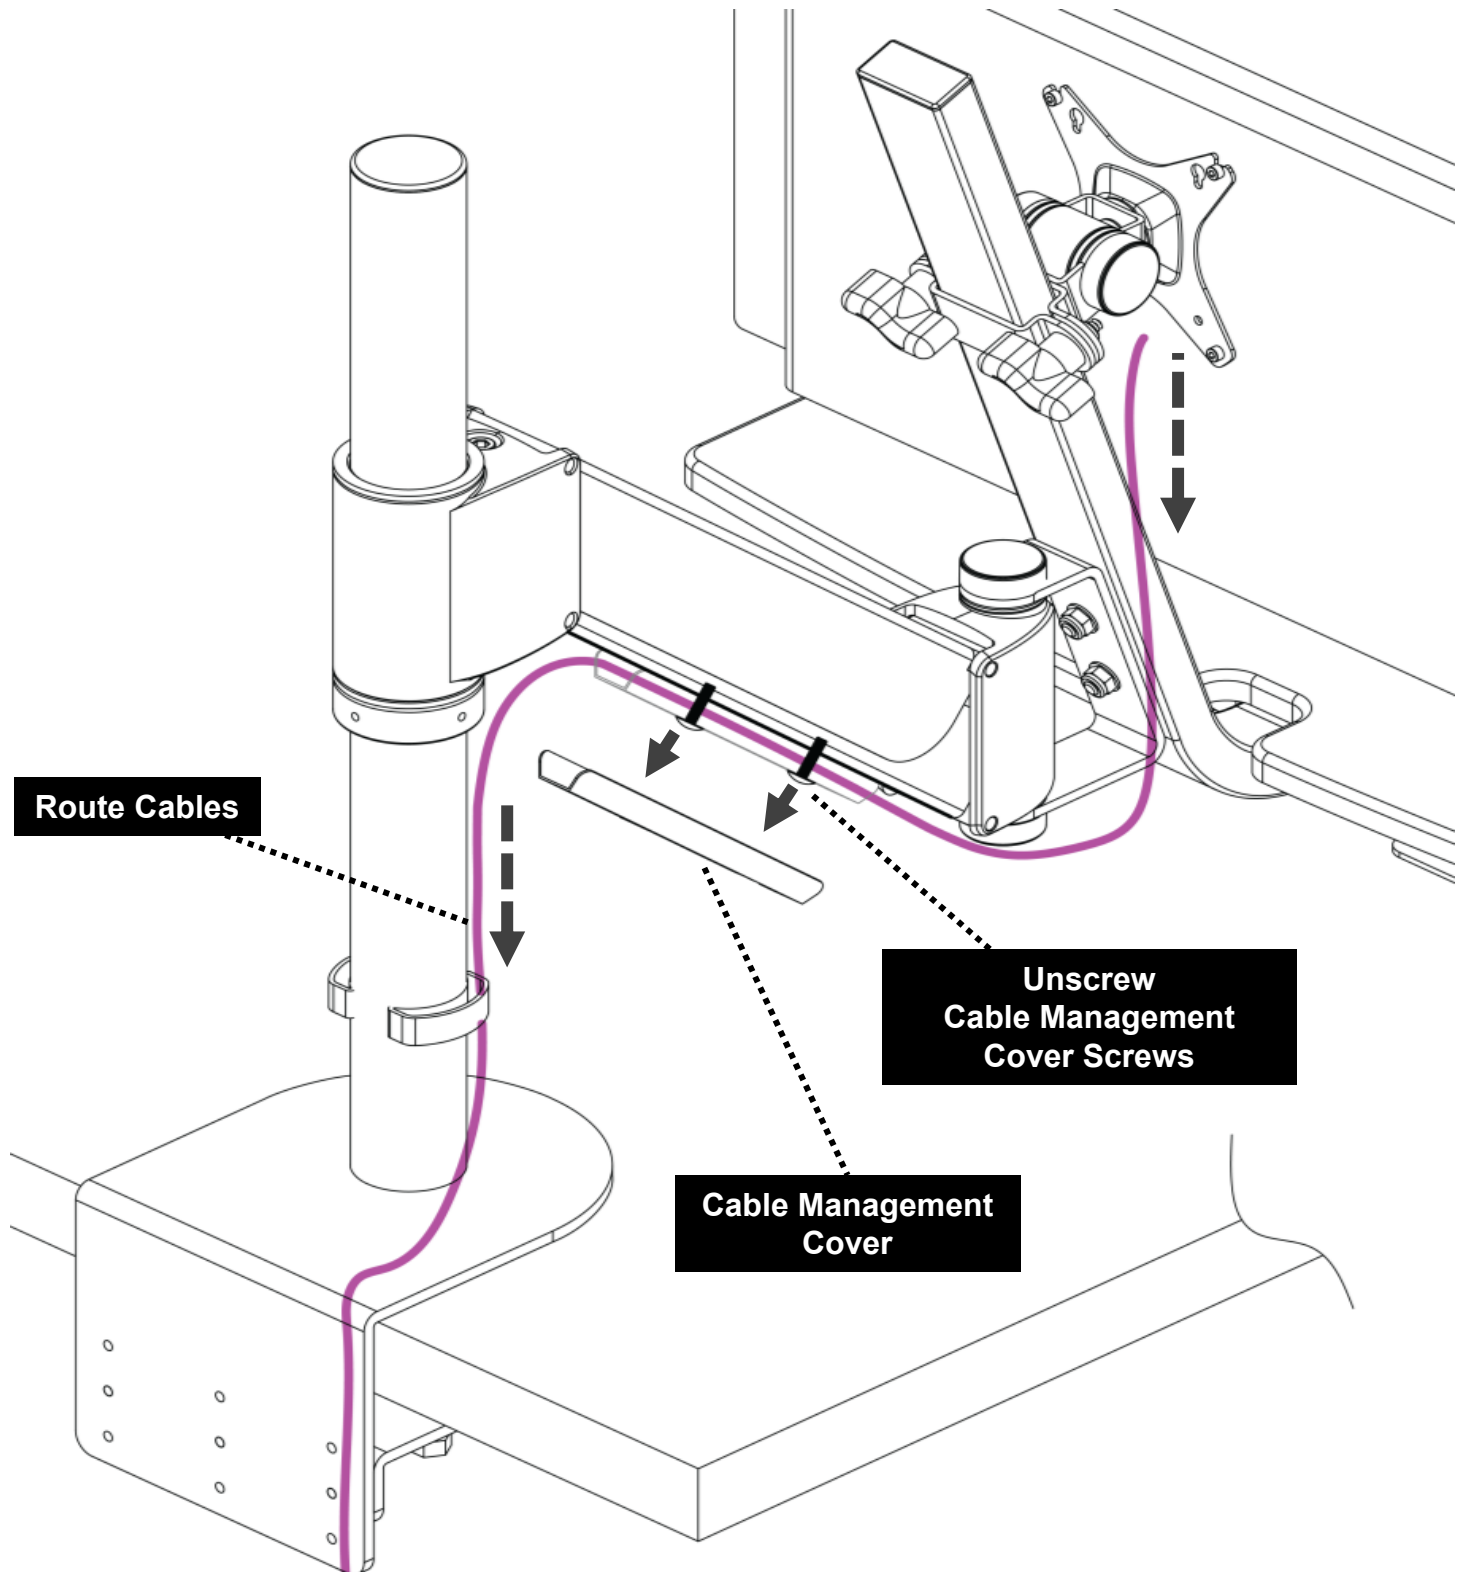



Phone: 1-800-833-3746

Email: customerservice@esiergo.com

Web: www.esiergo.com